


1SD 710



Motor	A	B	C
2,2 kW - 3,8 kW	128	Ø176	431
3,0 kW - 4,6 kW	135	Ø220	446
4,0 kW - 6,0 kW	148	Ø220	470

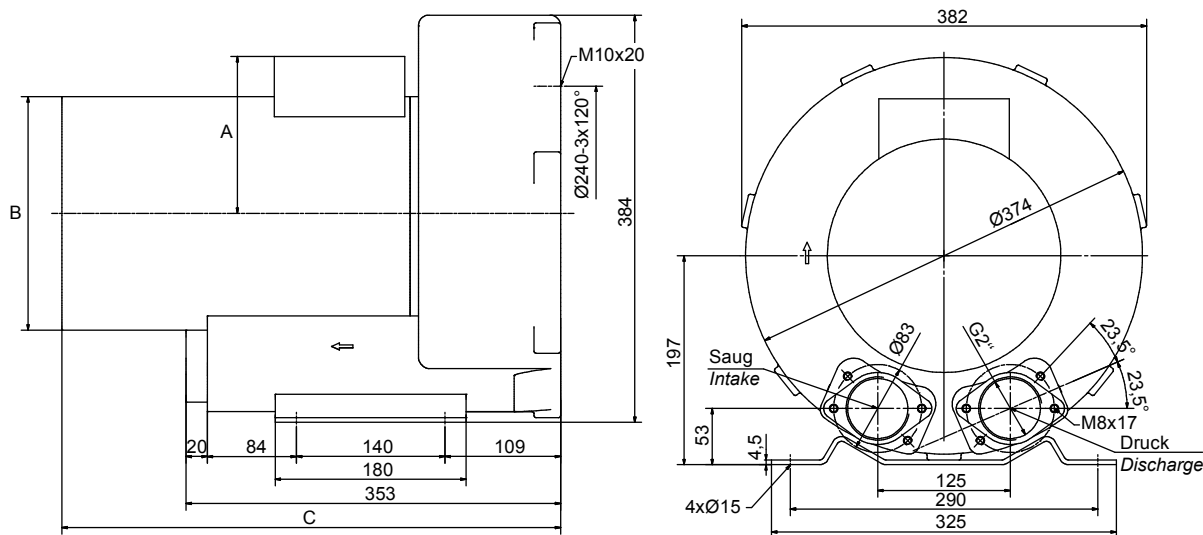

FREQUENZUMRICHTER GEEIGNET!
FREQUENCY CONVERTER-SUITABLE!

Maße in mm - unverbindlich.
Dimensions in mm - subject to modifications.

Typ Type		Frequenz Frequency	Grenzwerte der Drosselkurve Überdruck Maximum performance when used as blower		Grenzwerte der Drosselkurve Unterdruck Maximum performance when used as extractor		Nennwerte des Motors Motor ratings			Schalldruckpegel Sound pressure level	Gewicht (ca.) Weight (approx.)
			$\dot{V}_{max.}$	$\Delta p_t \text{ max.}$	$\dot{V}_{max.}$	$\Delta p_t \text{ max.}$	Leistung	Spannung	Strom		
			$\dot{V}_{max.}$	$\Delta p_t \text{ max.}$	$\dot{V}_{max.}$	$\Delta p_t \text{ max.}$	Rated output	Voltage	Current		
		Hz	m³/min	mbar	m³/min	mbar	kW	V	A	dB (A)	kg
1SD 710	✓	50	5,30	200	5,30	210	2,20	207-253/ 360-440	8,10/4,60	69	30
		60	6,27	200	6,27	210	3,80	220-250/ 415-480	13,00/7,50	72	30
1SD 710	✓	50	5,30	290	5,30	270	3,00	207-253/ 360-440	12,50/7,20	69	36
		60	6,27	230	6,27	250	4,60	220-250/ 415-480	14,70/8,50	72	36
1SD 710	✓	50	5,30	330	5,30	290	4,00	360-440	9,00	69	42
		60	6,27	330	6,27	330	6,00	415-480	10,90	72	42

Überdruck / Pressure

Unterdruck / Vacuum

