


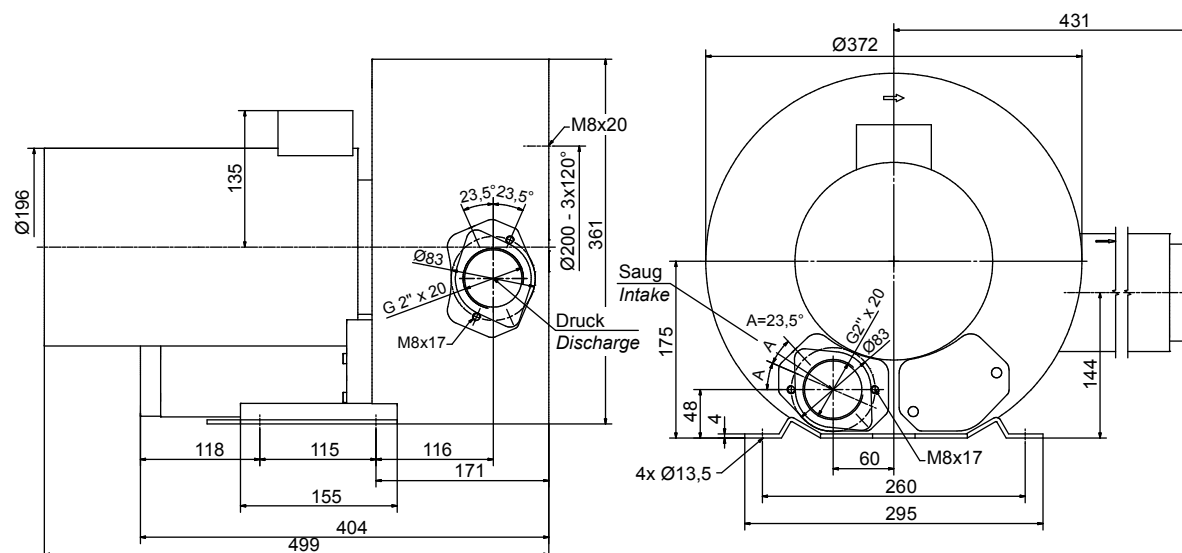

FREQUENZUMRICHTER GEEIGNET!
FREQUENCY CONVERTER-SUITABLE!

Maße in mm - unverbindlich.
Dimensions in mm - subject to modifications.

Typ Type		Frequenz Frequency	Grenzwerte der Drosselkurve Überdruck Maximum performance when used as blower		Grenzwerte der Drosselkurve Unterdruck Maximum performance when used as extractor		Nennwerte des Motors Motor ratings			Schalldruckpegel Sound pressure level	Gewicht (ca.) Weight (approx.)
			$\dot{V}_{max.}$	$\Delta p_t \text{ max.}$	$\dot{V}_{max.}$	$\Delta p_t \text{ max.}$	Leistung	Spannung	Strom		
			$\dot{V}_{max.}$	$\Delta p_t \text{ max.}$	$\dot{V}_{max.}$	$\Delta p_t \text{ max.}$	Rated output	Voltage	Current		
		Hz	m³/min	mbar	m³/min	mbar	kW	V	A	dB (A)	kg
2SD 520	✓	50	3,83	410	3,83	340	3,00	207-253/ 360-440	12,50/7,20	72	39
		60	4,58	360	4,58	380	4,60	220-250/ 415-480	14,70/8,50	74	39
2SD 520	✓	50	3,83	440	3,83	390	4,00	360-440	10,00	72	44
		60	4,58	480	4,58	410	6,00	415-480	10,90	74	44

Überdruck / Pressure

Unterdruck / Vacuum

