

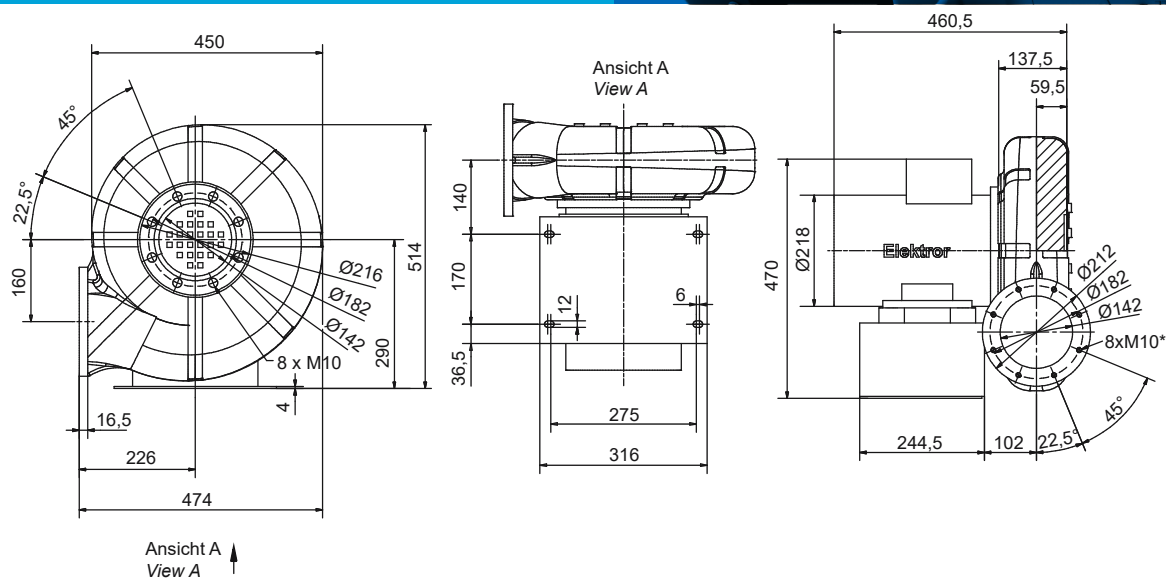


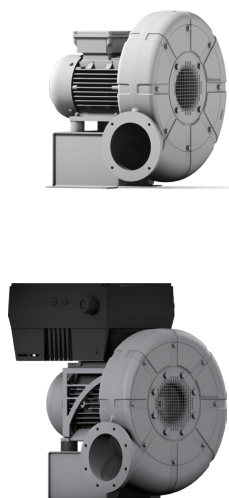

*Kann als Durchgangsloch für M8 Schrauben verwendet werden.
*Can be used as through-hole for M8 screw.

Type	q_{v1} [m³/min]	p_f [Pa]	U [V]	f [Hz]	I [A]	n [min⁻¹]	P_a [kW]	m [kg]
A-HP 330/33-120/7,5*	33,3	10580	400 Δ	120	15,5	7105	7,5	51
A-HP 330/33-120/11,0*	61,9	10580	400 Δ	120	21,2	7130	11,0	51

Kennlinien / Characteristic curves $q_1 = 1,2 \text{ kg/m}^3$

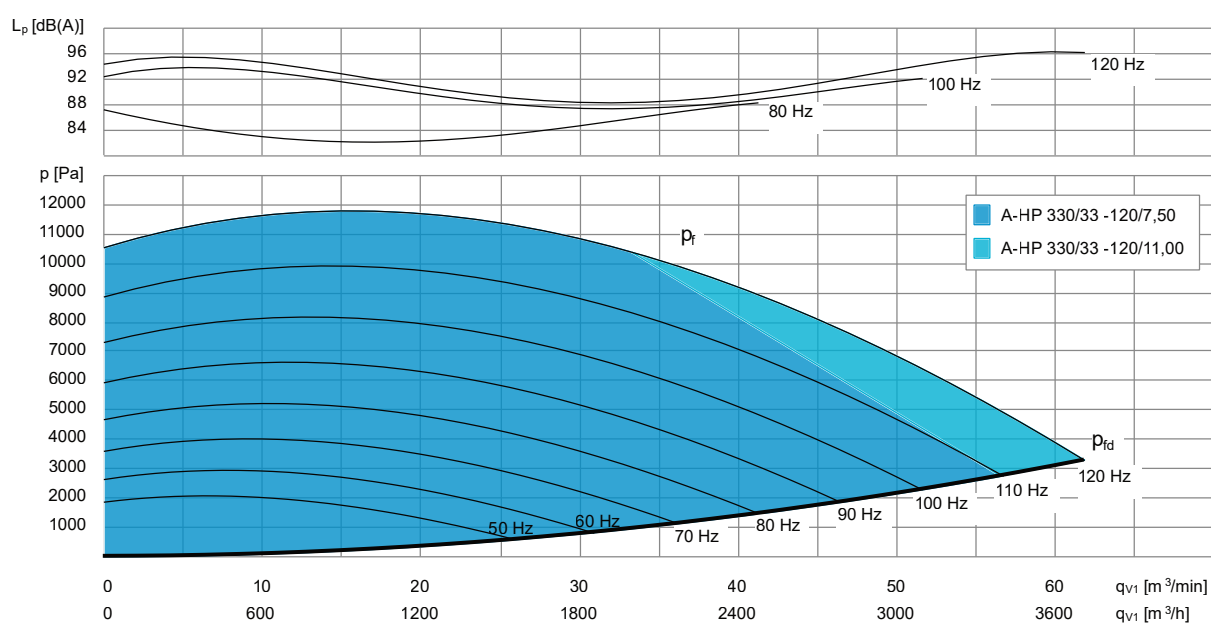

q_{v1} Volumenstrom am Ventilatoreintritt / Inlet volume flowrate
 p_{td} Dynamischer Ventilatorruck / Dynamic Fan pressure
 q_1 Luftdichte am Ventilatoreintritt / Inlet air density
 L_p Schalldruckpegel / Sound pressure level

P_a Motorleistung - Wellenleistung / Motor rating
 I Stromaufnahme / Current consumption
 n Drehzahl / Number of revolutions

p_f Ventilatorruck / Fan pressure
 f Frequenz / Frequency
 m Masse / Mass

Maße in mm / Dimensions in mm. Technische und konstruktive Änderungen vorbehalten / Technical and constructional subject to change.
*Eine Drehzahlregelung muss installiert werden. / A variable speed drive must be installed.