



Food & Beverage

A guide to Products and Services

aerospace
climate control
electromechanical
filtration
fluid & gas handling
hydraulics
pneumatics
process control
sealing & shielding

Parker | **domnick**
hunter

ENGINEERING YOUR SUCCESS.

Contact

Parker Hannifin Manufacturing Ltd
domnick hunter Process Filtration - Europe
Durham Road
Birtley, Co. Durham
DH3 2SF, England
phone +44 (0)191 4105121
fax +44 (0)191 4105312
email: dhprocess@parker.com
www.parker.com/dhb beverage

Parker Hannifin Corporation
domnick hunter Process Filtration - North America
2340 Eastman Avenue,
Oxnard, California, USA 93030
toll free: 877 784 2234
phone: +1 805 604 3400
fax: +1 608 824 0509
email: dhsales.na@parker.com
www.parker.com/dhb beverage

Contents

Wine
10-11
12-13
14-15
16-17
18-19

www.parker.com/dhwine

BEVPOR PS	Final Stabilization
BEVPOR PW	Final Stabilization
BEVPOR PH	Final Stabilization
PREPOR NG	Pre-stabilization
PEPLYN TF	Clarification



Brewing
24-25
26-27
28-29
30-31
32-33

www.parker.com/dhbeer

BEVPOR PS	Final Stabilization
BEVPOR PW	Final Stabilization
BEVPOR PH	Final Stabilization
PREPOR NG	Pre-stabilization
PEPLYN TF	Clarification



Bottled Water
38-39
40-41
42-43
44-45
46-47
48-49
50-51

www.parker.com/dhbottledwater

BEVPOR MS	Final Sterilization
BEVPOR MW	Final Sterilization
BEVPOR MH	Final Sterilization
BEVPOR PS	Final Stabilization
BEVPOR PW	Final Stabilization
BEVPOR PH	Final Stabilization
PREPOR NG	Pre-stabilization



Cider
54-55
56-57
58-59
60-61

www.parker.com/dhcider

BEVPOR PS	Final Stabilization
BEVPOR PW	Final Stabilization
BEVPOR PH	Final Stabilization
PREPOR NG	Pre-stabilization



Contents

General and Utilities	
64-65	CRYPTOCLEAR PES Final Stabilization
66-67	CRYPTOCLEAR PLUS Pre-stabilization
68-69	PREPOR PP Pre-stabilization
70-71	PEPLYN PLUS Pre-stabilization
72-73	PEPLYN HD Clarification
74-75	PEPLYN HA Clarification
76-77	PROPLEAT PP Clarification
78-79	PARMAX Clarification
80-81	MAXGUARD Clarification
82-83	BAG FILTERS Clarification
84-85	BEVPOR WG Final Sterilization
86-87	BEVPOR MS Final Sterilization
88-89	SPUNFLOW QN Clarification
90-91	SPUNFLOW QA Clarification
92-93	CARBOFLOW MX Dechlorination
94-97	STEAM FILTERS Clarification
Air & Gas	
100-101	HIGH FLOW BIO-X Gas Sterilization
102-103	BIO-X II Gas Sterilization
104-105	TETPOR AIR Gas Sterilization
106-107	HIGH FLOW TETPOR II Gas Sterilization
108-109	HIGH FLOW PREPOR GFA Gas Prefiltration
110-111	PEPLYN AIR Gas Prefiltration



www.parker.com/dhbeverage

Instruments

114-115

116-117

Valairdata 3

Integrity Test Unit

Bevcheck &
Bevcheck Plus

Integrity Test Units

Filter Housings

120-123

124-128

130-133

134-135

136-139

140-141

142-144

146-147

HIL

Coarse Utility - Liquid

HIL Multi

Coarse Utility - Liquid

HSL Single

Sanitary Beverage

VSH Multi

Sanitary Beverage

HBA

Air & Gas

HPG Enhanced Plus

High Pressure Air & Gas

HSV

Vent Applications

VIS

High Flow Steam

Additional Support

148-149

150-151

152-153

154-157

158

End Cap Styles and Dimensions

Conversion Tables

Installation and Operating Guidelines

Glossary of Terms used in Filtration

Supporting documents and video





Parker domnick hunter commitments

Wine collection

Old and new world producers of wine have partnered with Parker domnick hunter to reach their quality and production requirements.

A proven product range combined with knowledgeable specialists of the wine making process enables Parker domnick hunter to provide value added solutions that guarantee both quality, and process efficiencies.


Parker domnick hunter provides local application specialists focussed on providing added value solutions to winemakers and contract packagers. The local team is supported by innovative products, state of the art manufacturing facilities and international support teams, all aimed at providing solutions which match Parker domnick hunter's capabilities with the needs of the producer. The ultimate aim is to offer producers greater control of their process, leading to consistent quality and improved operational efficiency.



www.parker.com/dhwine

Typical Process



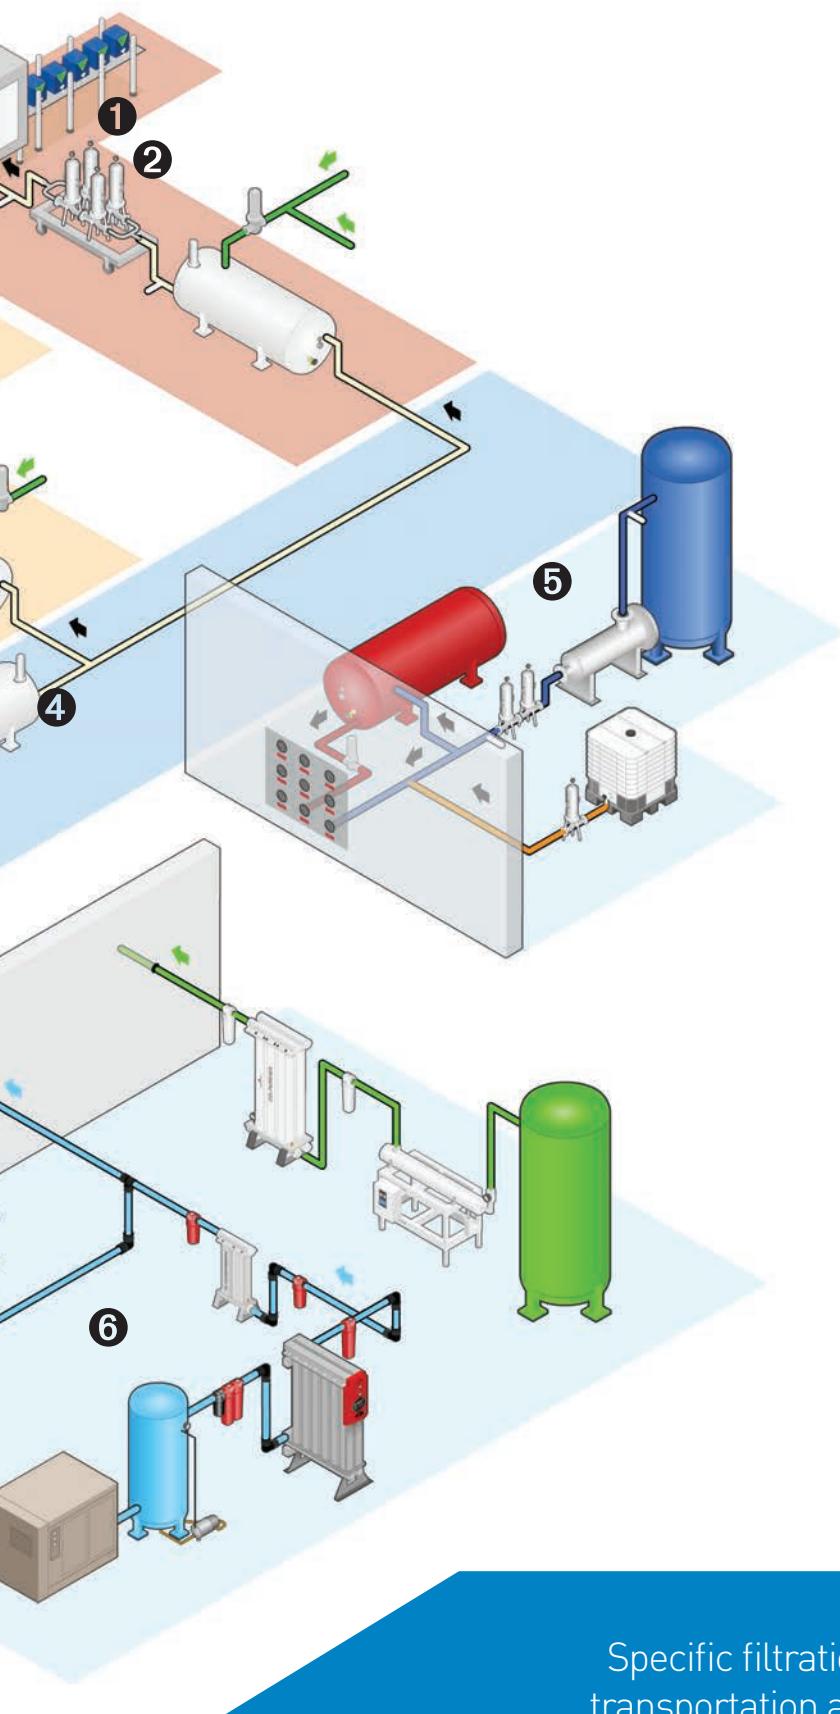

Specialized Wine Applications

- 1** Final Stabilization
- 2** Pre-stabilization
- 3** Clarification
- 4** Sterilization of Gases
- 5** Water Utilities
- 6** Gas Utilities

Specific filtration requirements within the wine making, transportation and packaging processes dictate different design criteria for filter systems. Parker domnick hunter have a range of specialized filtration systems designed to add value at each stage of wine production, stabilization and packaging operations.



BEVPOR PS Wine


Filter Cartridges



Features

- Validated retention to spoilage organisms
- Inert materials of construction
- Easily integrity tested in-situ

Performance Characteristics

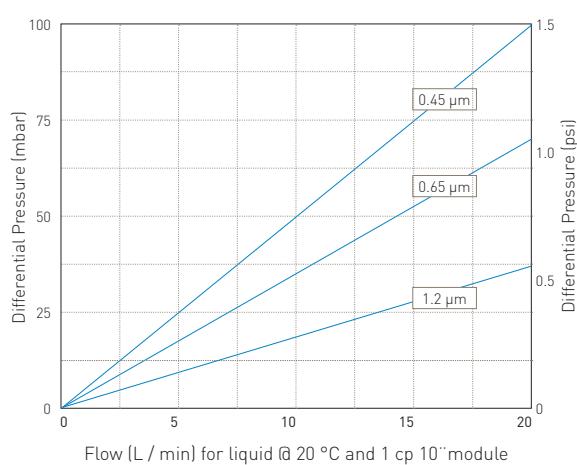

BEVPOR PS wine filters protect the unique characteristics of wine by removing yeast and other spoilage organisms to ensure microbial stabilization prior to packaging.


The inert and highly asymmetric PES membrane provides validated microbial retention to typical spoilage organisms whilst preserving the wine's unique properties to ensure it reaches the consumer as the wine maker intended. Combined with hydrophilic properties for easy integrity testing, BEVPOR PS filters provide assured performance throughout their service life.

BEVPOR PS filters have been designed to provide a cost-effective solution to wine microbial stabilization by providing increased process control with increased operational efficiency.

Benefits

- Ensures effective microbial stabilization of wine
- Preserves the desirable characteristics of the wine
- Assured filtration performance

Filtration Stage

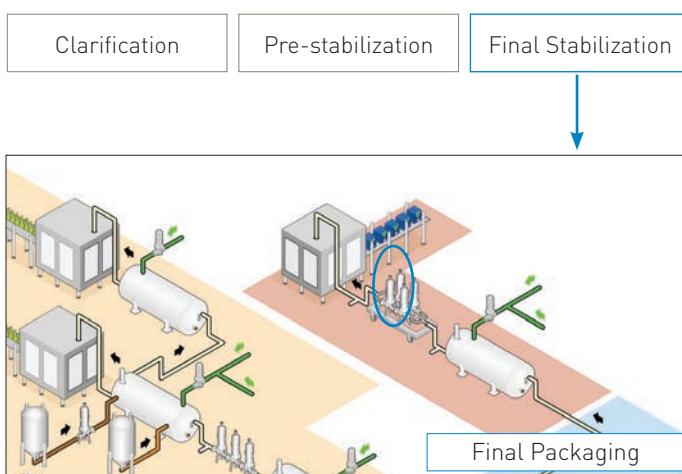



Specifications

Materials of Construction

Filtration Membrane:	Polyethersulphone
Upstream Support:	Polyester
Downstream Support:	Polyester
Inner Support Core:	Polypropylene
Outer Protection Cage:	Polypropylene
End Caps:	Nylon
End Cap Insert:	316L Stainless Steel
O-rings:	Silicone / EPDM

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.



Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperature °C	Temperature °F	Max Forward dP (bar)	Max Forward dP (psi)
20	68	5.0	72.5
40	104	4.0	58.0
60	140	3.0	43.5
80	176	2.0	29.0
90	194	1.0	14.5
>100 (steam)	>212 (steam)	0.3	4.0

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.6 m² (6.45 ft²)

Cleaning and Sterilization

BEVPOR PS cartridges can be repeatedly steam sterilized in-situ or autoclaved at up to 130°C (266°F). They can be sanitized with hot water at up to 90°C (194°F) and are compatible with a wide range of chemicals. Please refer to our Clean-in-Place support guide or contact your local Parker representative for more information.

Retention Characteristics

The retention characteristics of BEVPOR PS filters have been validated by challenges performed with the following organisms.

Organism	LRV when challenged with a minimum of 10 ⁷ cfu per cm ²		
	0.45	0.65	1.2
<i>Saccharomyces cerevisiae</i>	FR	FR	FR
<i>Brettanomyces bruxellensis</i>	FR	FR	FR
<i>Lactobacillus brevis</i>	FR	FR	2.0
<i>Acetobacter oeni</i>	FR	FR	7.6
<i>Pseudomonas aeruginosa</i>	9.1	8.9	4.8
<i>Serratia marcescens</i>	FR	FR	2.4

*FR - Fully retentive during challenge

When expressed as titre reduction "FR" equates to >10⁷ per 10" module.

Integrity Test Data

All filters are flushed with pharmaceutical grade purified water prior to despatch. They are integrity tested to the following limits:

Diffusional Flow Test Parameters	0.45	0.65	1.2
Test Pressure (barg)	1.4	1.0	0.6
Test Pressure (psig)	20.0	15.0	9.0
Max Diffusional Flow per 10" (ml /min)	16.0	16.0	16.0

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number. Additionally, each module displays a unique serial number providing full manufacturing traceability.

Ordering information

BPS - <input type="text"/>	<input type="text"/>	- <input type="text"/>	<input type="text"/> A	<input type="text"/>	<input type="text"/>
Code Length (Nominal)	Code Micron	Code End Cap (10 inch)	Code O-rings		
1 10" (250 mm)	04 0.45 µm	C Fin / 226 Bayonet	S Silicone		
2 20" (500 mm)	06 0.65 µm	D Fin / 222	E EPDM		
3 30" (750 mm)	12 1.2 µm	E Flat Top / 222			
4 40" (1000 mm)		G Recess / 222			
		R BF / 22 Bayonet			

**VSH & HSL
HOUSING RANGE
AVAILABLE**



BEVPOR PW Wine

Filter Cartridges



BEVPOR PW wine filters protect the unique characteristics of wine by removing yeast and other spoilage organisms to ensure microbial stabilization prior to packaging.

The inert and highly asymmetric PES membrane provides validated microbial retention to typical spoilage organisms whilst preserving the wine's unique properties to ensure it reaches the consumer as the wine maker intended. Combined with hydrophilic properties for easy integrity testing, BEVPOR PW filters provide assured performance throughout their service life.

The incorporation of an active prefilter layer allows graded retention throughout the depth of the filter to resist blockage, resulting in an increased capacity and long service lifetimes.

BEVPOR PW filters have been designed to provide a cost-effective solution to wine microbial stabilization by providing increased process control with increased operational efficiency.


Features

- Validated retention to spoilage organisms
- Inert materials of construction
- Easily integrity tested in-situ
- Integral depth prefiltration layer


Benefits

- Ensures effective microbial stabilization of wine
- Protects the desirable characteristics of the wine
- Assured filtration performance
- Increased throughput to blockage

Performance Characteristics

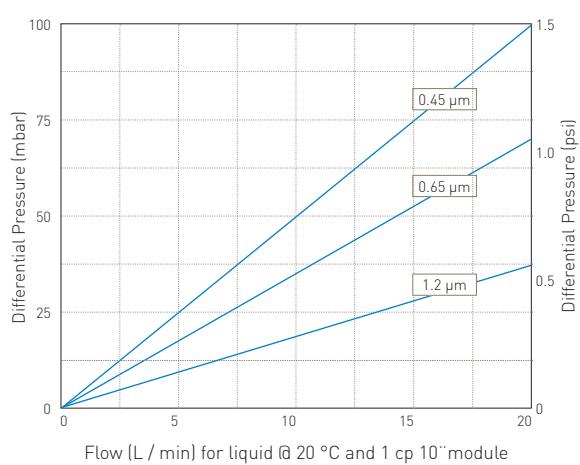

Filtration Stage

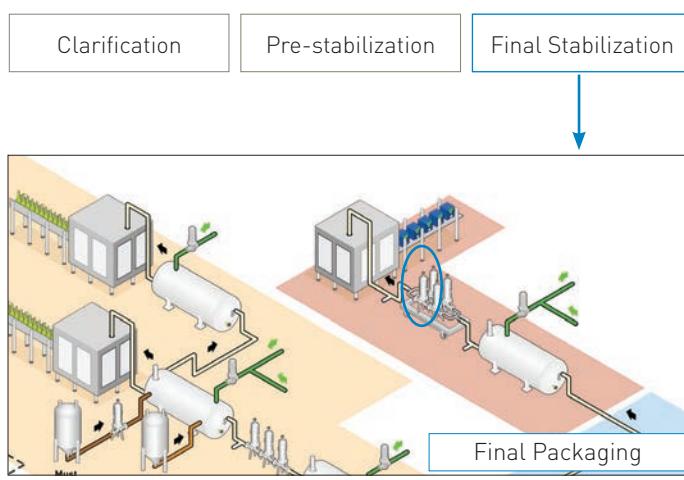



BEVPOR PH Wine


Filter Cartridges



Features

- Validated retention to spoilage organisms
- Inert materials of construction
- Easily integrity tested in-situ
- Integral depth prefiltration layer
- High filtration area

Performance Characteristics

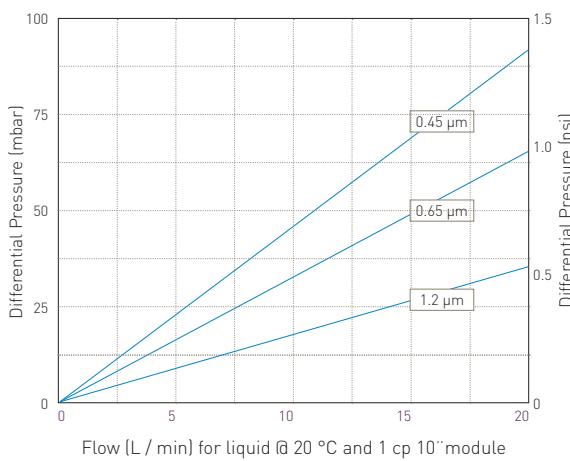

BEVPOR PH wine filters protect the unique characteristics of wine by removing yeast and other spoilage organisms to ensure microbial stabilization prior to packaging.

The inert and highly asymmetric PES membrane provides validated microbial retention to typical spoilage organisms whilst preserving the wine's unique properties to ensure it reaches the consumer as the wine maker intended. Combined with hydrophilic properties for easy integrity testing, BEVPOR PH filters provide assured performance throughout their service life.


The incorporation of an integral prefilter layer, combined with an increased filtration area provides high wine flow rates, greater resistance to blockage and maximized service lifetime.

BEVPOR PH filters have been designed to provide the optimum solution to the microbial stabilization of wine by providing increased process control with maximized operational efficiency.

Benefits

- Ensures effective microbial stabilization of wine
- Protects the desirable characteristics of the wine
- Assured filtration performance
- Increased throughput to blockage
- High wine flow and maximized operational efficiency

Filtration Stage

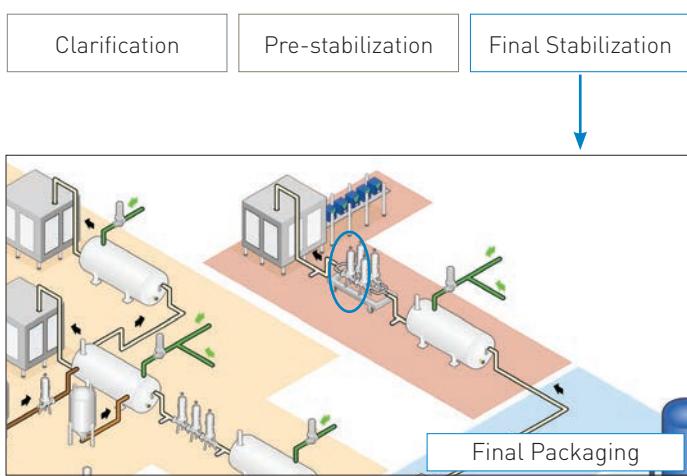



PREPOR NG

Wine

Filter Cartridges

Parker | **domnick**
hunter



Parker domnick hunter's continued focus on process optimization and control has led to the development of a new range of prefilters for the clarification and pre-stabilization stages of wine processing and packaging.


The control of particulate and microbial loading is important to provide stability to wine during storage and transport and to ensure that the finished product maintains and develops its desirable characteristics after packaging.

Parker domnick hunter's next generation of PREPOR NG filters have been developed to remove yeast and reduce bacterial loading to improve short-term stability and to increase the service life of downstream membrane filters. The robust componentry allows for caustic and backwash regeneration, making the filter stage a reliable and cost-effective solution to intermediate stabilization.

Features

- Fully validated yeast removal and bacterial reduction
- Truly optimized graded density using unique Optimized Depth Construction (ODC) Technology
- Mechanically strong and chemically resistant polypropylene construction designed for chemical CIP and backwash


Performance Characteristics

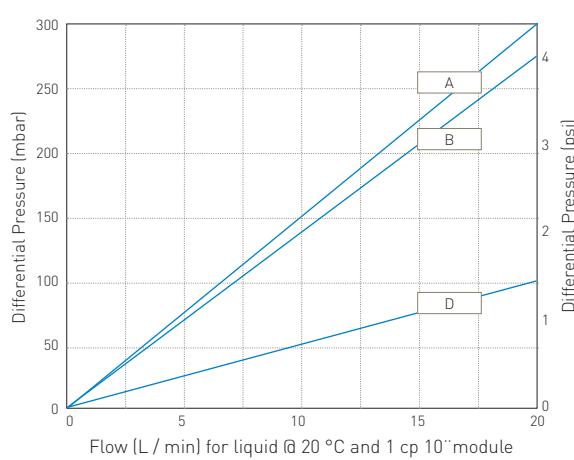

Benefits

- Effective control of clarity and microbial stability
- Increased filtration capacity
- Increased service life when combined with regular CIP regeneration

Filtration Stage

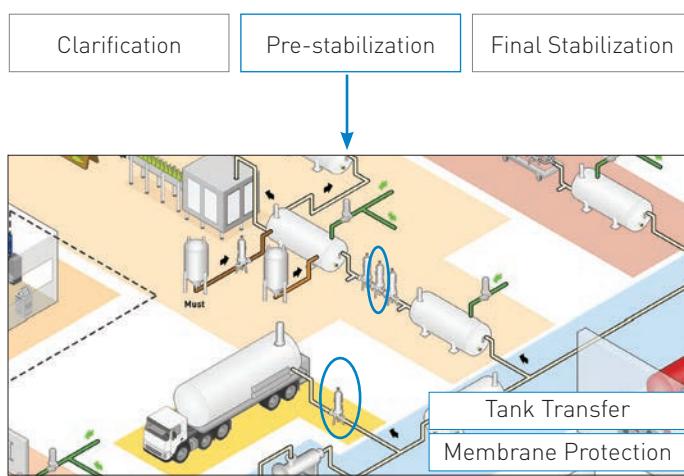



Specifications

Materials of Construction

Filtration Media:	Polypropylene
Upstream Support:	Polypropylene
Downstream Support:	Polypropylene
Inner Support Core:	Polypropylene
Outer Protection Cage:	Polypropylene
End Caps:	Polypropylene
End Cap Insert:	316L Stainless Steel
O-rings:	Silicone / EPDM

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.



Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperature °C	Temperature °F	Max Forward dP [bar]	Max Forward dP [psi]
20	68	5.0	72.5
40	104	4.0	58.0
60	140	3.0	43.5
80	176	2.0	29.0
90	194	1.0	14.5
>100 (steam)	>212 (steam)	0.3	4.0

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.5 m² (5.38 ft²)



Optimized Depth Construction (ODC) provides a unique graded density combining longer service life with absolute filtration efficiency.


Cleaning and Sterilization

PREPOR NG cartridges can be repeatedly steam sterilized in-situ or autoclaved up to 135 °C (275 °F). They can be sanitized with hot water up to 90 °C (194 °F), are compatible with a wide range of chemicals and can be backwashed. Please refer to our Clean-in-Place Support Guide or contact your local Parker representative for more information.

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number. Additionally, each module displays a unique serial number providing full manufacturing traceability.

Performance Benefits

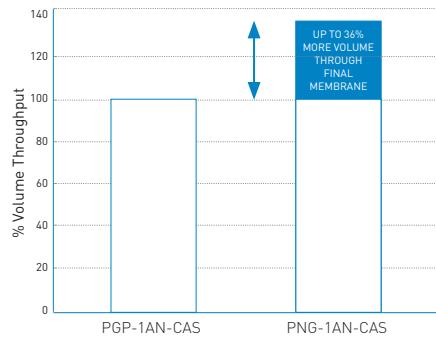

ODC technology combines fine particle retention with increased strength and stability to enhance the performance offered by the PREPOR range.

Ordering information

PNG - 	 - - A	
Code Length (Nominal)	Code Micron	Code End Cap (10 inch)
1 10" (250 mm)	A 0.5	C BF / 226 Bayonet
2 20" (500 mm)	B 0.6	D Fin / 222
3 30" (750 mm)	C 1.0	E Flat Top / 222
4 40" (1000 mm)	D	G Recess / 222
		R BF / 222 Bayonet
		Code O-rings
		S Silicone
		E EPDM

VSH & HSL
HOUSING RANGE
AVAILABLE



PEPLYN TF

Wine


Filter Cartridges



Features

- Robust polypropylene construction designed for chemical CIP and backwash
- High effective filtration area
- A range of absolute retention ratings

Performance Characteristics

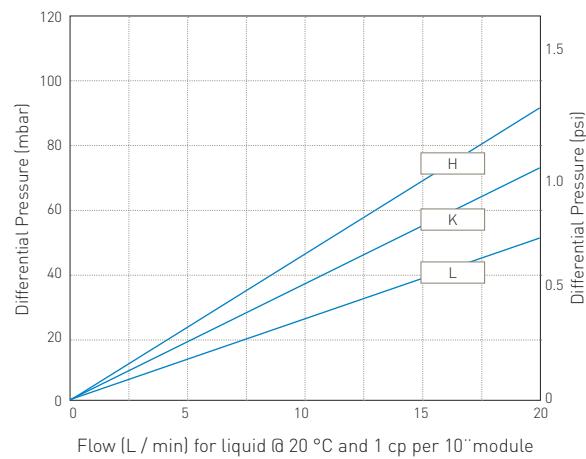


PEPLYN TF filters have been specifically designed to protect wine from residual particulate which can remain following primary clarification processes. By combining absolute particle retention, high dirt holding capacity and resistance to blockage with ease of regeneration, PEPLYN TF filters provide the optimum solution for trap filtration.

The carefully constructed polypropylene media ensures insoluble particulate is captured on the surface of the filtration media, in a way that it can be easily removed through backwashing. This feature, combined with the strong, rigid construction provides reliable filtration performance over extended operational lifetimes.

Benefits

- Extended service life when combined with regular CIP regeneration
- High wine flow and resistance to blockage under high loading conditions
- Defined cut-off to powders and flexibility to optimize the filtration

Filtration Stage

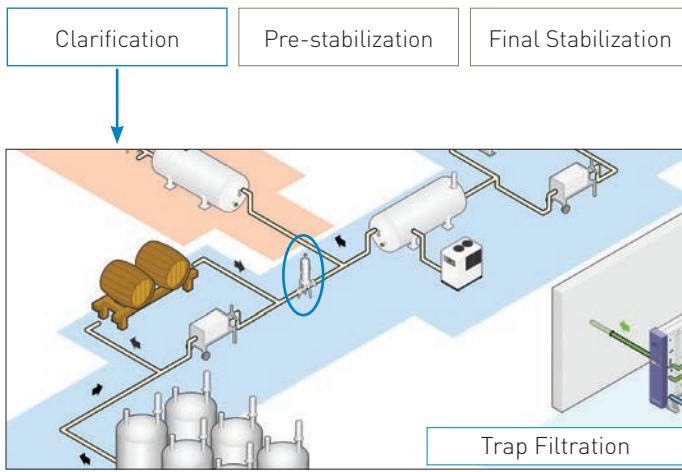



Specifications

Materials of Construction

Filtration Media:	Polypropylene
Upstream Support:	Polypropylene
Downstream Support:	Polypropylene
Inner Support Core:	Polypropylene
Outer Protection Cage:	Polypropylene
End Caps:	Polypropylene
End Cap Insert:	316L Stainless Steel
O-rings:	Silicone / EPDM

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.



Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperature °C	Temperature °F	Max Forward dP [bar]	Max Forward dP [psi]
20	68	5.0	72.5
40	104	4.0	58.0
60	140	3.0	43.5
80	176	2.0	29.0
90	194	1.0	14.5
>100 (steam)	>212 (steam)	0.3	4.0

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.7 m² (7.53 ft²)

Cleaning and Sterilization

PEPPLYN TF cartridges can be repeatedly steam sterilized in-situ or autoclaved up to 135 °C (275 °F). They can be sanitized with hot water up to 90 °C (194 °F), are compatible with a wide range of chemicals and can be backwashed. Please refer to our Clean-in-Place Support Guide or contact your local Parker representative for more information.

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number.

Additionally, each module displays a unique serial number providing full manufacturing traceability.

Retention Characteristics

The retention characteristics of PEPPLYN TF filter cartridges have been determined by a single-pass technique using suspensions of ISO 12103 Pt. 1 A2 Fine and A4 Course test dust in water.

Micron Rating at various efficiencies

Efficiency	>99.99%	99.98%	99.90%	99%	95%	90%
Beta Ratio	10000	5000	1000	100	20	10
H	5.00	4.70	4.50	3.50	2.30	1.00
K	10.00	8.00	7.00	4.80	3.80	2.80
L	15.00	12.00	10.00	7.20	6.00	4.50

Ordering information

PTF -

Code	Length (Nominal)
1	10" (250 mm)
2	20" (500 mm)
3	30" (750 mm)
4	40" (1000 mm)

- N - A

Code	Micron
H	5
K	10
L	15

Code	End Cap (10 inch)
C	Fin / 226 Bayonet
D	Fin / 222
E	Flat Top / 222
G	Recess / 222
R	BF / 222 Bayonet

Code	O-rings
S	Silicone
E	EPDM

VSH & HSL
HOUSING RANGE
AVAILABLE





Parker domnick hunter commitments

Brewing collection

Large multinational corporations, regional brewers and micro-brewers alike have partnered with Parker domnick hunter to successfully reach their quality and production requirements.

At the heart of the brewing process lies a totally natural sequence of events – the anaerobic fermentation of malted barley by yeast. In order to consistently produce the perfect brew, the fermentation, stabilization and packaging stages need to be closely controlled. Each stage of the process typically requires dedicated technology and equipment and there is a huge range of choice and flexibility in approaches.


Parker domnick hunter provide tailored filtration solutions which meet specific performance criteria. Through a structured program of technical analysis available from a network of international support hubs, we work with end users to achieve their goals. By combining specialist brewing knowledge with a dedicated product range, we deliver the Parker domnick hunter commitments of; protecting beer quality, reducing processing costs and providing specialist support.



www.parker.com/dhbeer



Typical Process

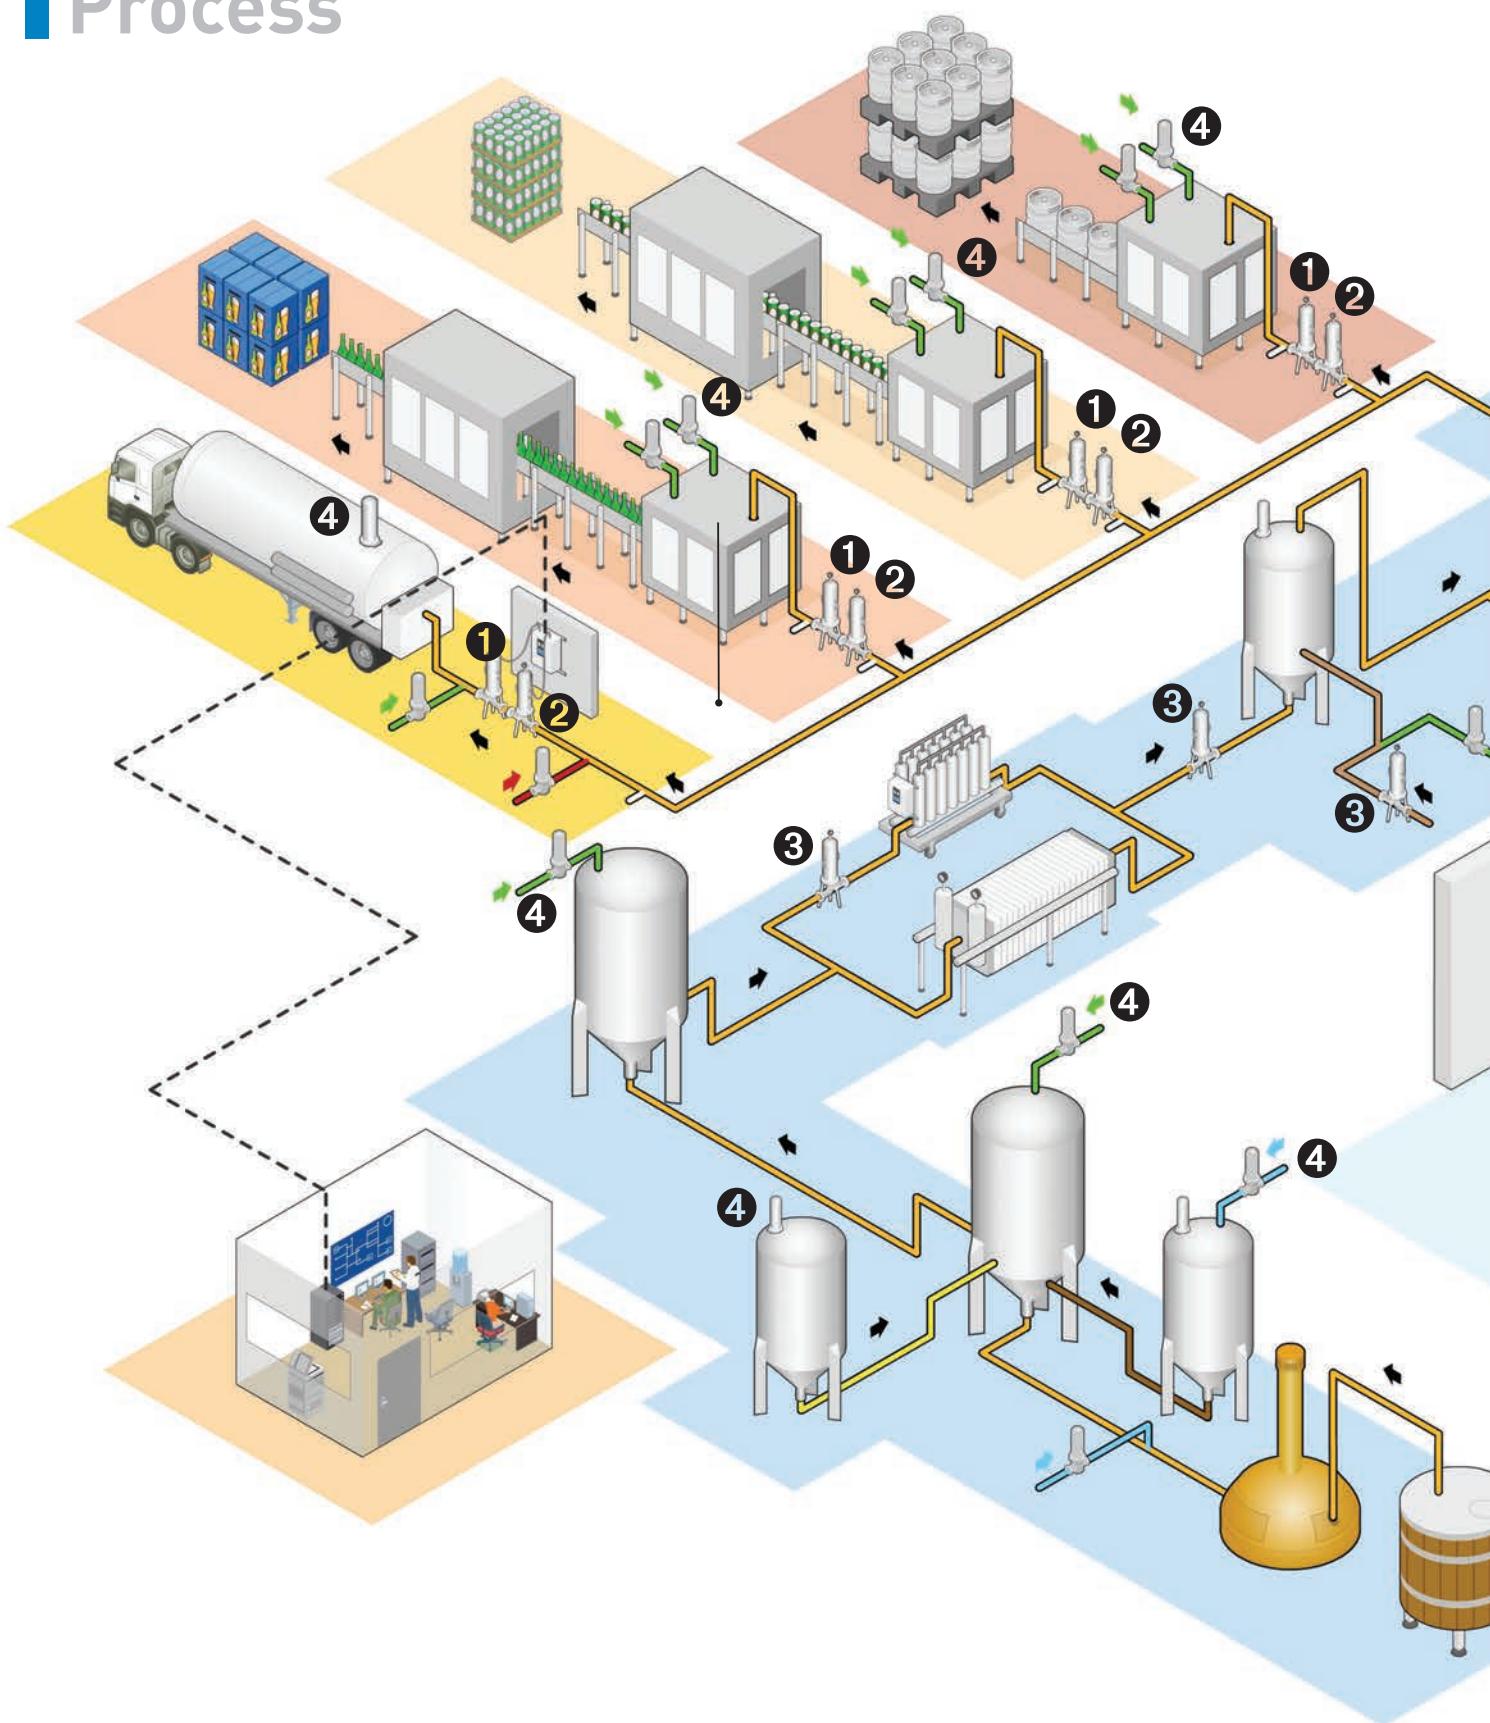

www.parker.com/dhbeer



Specialized Brewing Applications

- 1 Cold Stabilization
- 2 Pre-stabilization
- 3 Trap Filtration
- 4 Sterilization of Gases
- 5 Water Utilities
- 6 Gas Utilities

Specific filtration requirements within the brewery dictate different design criteria for the filter systems.

Parker domnick hunter have a range of specialized filtration systems designed to add value at each stage of beer production, stabilization and packaging operations.



BEVPOR PS

Brewing


Filter Cartridges



Features

- Validated retention to spoilage organisms
- Inert material of construction
- Easily integrity tested in-situ

Performance Characteristics

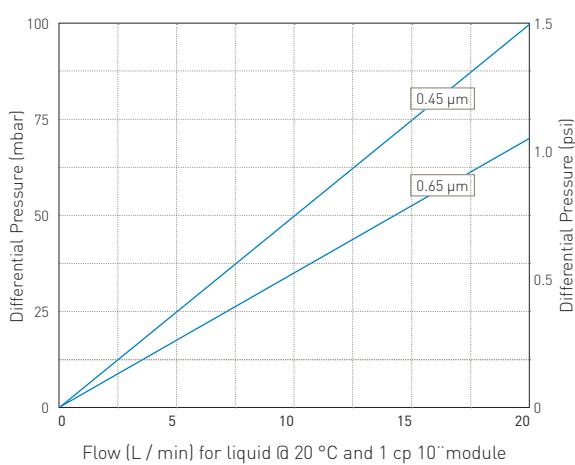

BEVPOR PS beer filters protect the unique characteristics of beer by removing yeast and other spoilage organisms to ensure microbial stability during cold stabilization.


The inert and highly asymmetric PES membrane provides validated microbial retention to typical spoilage organisms, whilst protecting the beer's organoleptic qualities to preserve a fresh taste and a long shelf-life once packaged. Combined with hydrophilic properties for easy integrity testing, BEVPOR PS filters provide assured performance throughout their service life.

BEVPOR PS filters have been designed to provide a cost effective solution to beer stabilization by providing increased process control with increased operational efficiency.

Benefits

- Ensures effective microbial stabilization of beer
- Preserves the organoleptic qualities of the beer
- Assured filtration performance

Filtration Stage

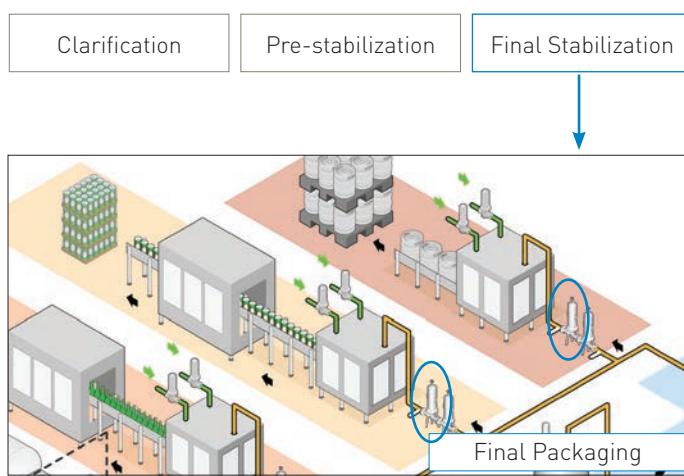



Specifications

Materials of Construction

Filtration Membrane:	Polyethersulphone
Upstream Support:	Polyester
Downstream Support:	Polyester
Inner Support Core:	Polypropylene
Outer Protection Cage:	Polypropylene
End Caps:	Nylon
End Cap Insert:	316L Stainless Steel
O-rings:	Silicone / EPDM

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.



Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperature °C	Temperature °F	Max Forward dP (bar)	Max Forward dP (psi)
20	68	5.0	72.5
40	104	4.0	58.0
60	140	3.0	43.5
80	176	2.0	29.0
90	194	1.0	14.5
>100 (steam)	>212 (steam)	0.3	4.0

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.6 m² (6.45 ft²)

Cleaning and Sterilization

BEVPOR PS cartridges can be repeatedly steam sterilized in-situ or autoclaved at up to 130 °C (266 °F). They can be sanitized with hot water at up to 90 °C (194 °F) and are compatible with a wide range of chemicals. Please refer to our Clean-in-Place support guide or contact your local Parker representative for more information.

Integrity Test Data

All filters are flushed with pharmaceutical grade purified water prior to despatch. They are integrity tested to the following limits:

Diffusional Flow Test Parameters	Micron Rating
Test Pressure (barg)	0.45 1.0
Test Pressure (psig)	20.0 15.0
Max Diffusional	
Flow per 10" (ml /min)	16.0 16.0

Retention Characteristics

The retention characteristics of BEVPOR PS filters have been validated by challenges performed with the following organisms.

Organism	LRV when challenged with a minimum of 10 ⁷ cfu per cm ²	
	0.45	0.65
<i>Saccharomyces cerevisiae</i>	FR	FR
<i>Brettanomyces bruxellensis</i>	FR	FR
<i>Lactobacillus brevis</i>	FR	FR
<i>Acetobacter oeni</i>	FR	FR
<i>Pseudomonas aeruginosa</i>	9.1	8.9
<i>Serratia marcescens</i>	FR	FR

*FR - Fully retentive during challenge

When expressed as titre reduction "FR" equates to >10⁷ per 10" module.

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number. Additionally, each module displays a unique serial number providing full manufacturing traceability.

Ordering information

BPS - <input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	A	<input type="text"/>
Code Length (Nominal)	Code Micron	Code End Cap (10 inch)	Code O-rings		
1 10" (250 mm)	04 0.45 µm	C Fin / 226 Bayonet	S Silicone		
2 20" (500 mm)	06 0.65 µm	D Fin / 222	E EPDM		
3 30" (750 mm)		E Flat Top / 222			
4 40" (1000 mm)		G Recess / 222			
		R BF / 222 Bayonet			

**VSH & HSL
HOUSING RANGE
AVAILABLE**



BEVPOR PW Brewing


Filter Cartridges



Features

- Validated retention to spoilage organisms
- Inert material of construction
- Easily integrity tested in-situ
- Integral depth prefiltration layer

Performance Characteristics

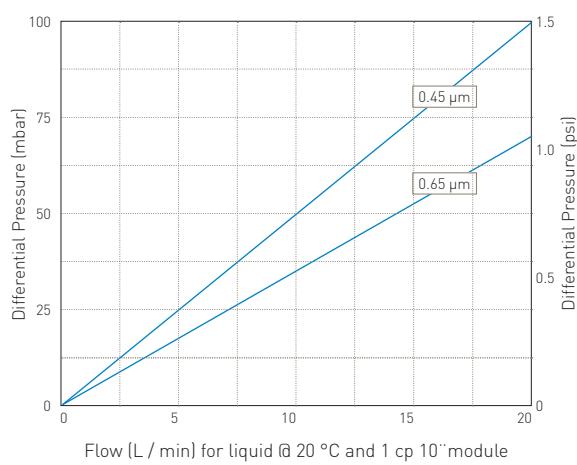

BEVPOR PW beer filters protect the unique characteristics of beer by removing yeast and other spoilage organisms to ensure microbial stability during cold stabilization.

The inert and highly asymmetric PES membrane provides validated microbial retention to typical spoilage organisms, whilst protecting the beer's organoleptic qualities to preserve a fresh taste and a long shelf-life once packaged.


The incorporation of an active prefilter layer allows graded retention throughout the depth of the filter to resist blockage, resulting in an increased capacity and long service lifetimes.

BEVPOR PW filters have been designed to provide a cost-effective solution to beer stabilization by providing increased process control with increased operational efficiency.

Benefits

- Ensures effective microbial stabilization of beer
- Preserves the organoleptic qualities of the beer
- Assured filtration performance
- Increased throughput to blockage

Filtration Stage

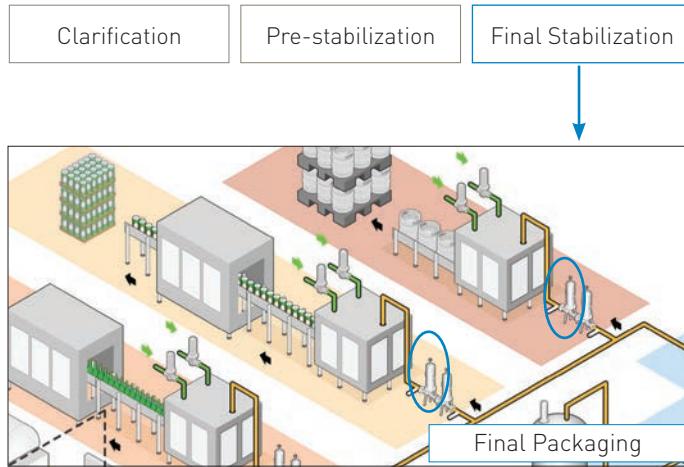



Specifications

Materials of Construction

Filtration Membrane:	Polyethersulphone
Prefilter Layer:	Polyester
Upstream Support:	Polyester
Downstream Support:	Polyester
Inner Support Core:	Polypropylene
Outer Protection Cage:	Polypropylene
End Caps:	Nylon
End Cap Insert:	316L Stainless Steel
O-rings:	Silicone / EPDM

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.



Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperature °C	Temperature °F	Max Forward dP (bar)	Max Forward dP (psi)
20	68	5.0	72.5
40	104	4.0	58.0
60	140	3.0	43.5
80	176	2.0	29.0
90	194	1.0	14.5
>100 (steam)	>212 (steam)	0.3	4.0

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.6 m² (6.45 ft²)

Cleaning and Sterilization

BEVPOR PW cartridges can be repeatedly steam sterilized in-situ or autoclaved at up to 130 °C (266 °F). They can be sanitized with hot water at up to 90 °C (194 °F) and are compatible with a wide range of chemicals. Please refer to our Clean-in-Place support guide or contact your local Parker representative for more information.

Integrity Test Data

All filters are flushed with pharmaceutical grade purified water prior to despatch. They are integrity tested to the following limits:

Diffusional Flow Test Parameters	Micron Rating
0.45	0.65
Test Pressure (barg)	1.4
Test Pressure (psig)	20.0
Max Diffusional	15.0
Flow per 10" (ml /min)	16.0
	16.0

Retention Characteristics

The retention characteristics of BEVPOR PW filters have been validated by challenges performed with the following organisms.

Organism	LRV when challenged with a minimum of 10 ⁷ cfu per cm ²	
	0.45	0.65
<i>Saccharomyces cerevisiae</i>	FR	FR
<i>Brettanomyces bruxellensis</i>	FR	FR
<i>Lactobacillus brevis</i>	FR	FR
<i>Acetobacter oeni</i>	FR	FR
<i>Pseudomonas aeruginosa</i>	9.1	8.9
<i>Serratia marcescens</i>	FR	FR

*FR - Fully retentive during challenge

When expressed as titre reduction "FR" equates to >10⁷ per 10" module.

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number. Additionally, each module displays a unique serial number providing full manufacturing traceability.

Ordering information

BPW	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>
		<input type="text"/>		<input type="text"/>		<input type="text"/>		<input type="text"/>
Code	Length (Nominal)	Code	Micron	Code	End Cap (10 inch)	Code	O-rings	
1	10" (250 mm)	04	0.45 µm	C	Fin / 226 Bayonet	S	Silicone	
2	20" (500 mm)	06	0.65 µm	D	Fin / 222	E	EPDM	
3	30" (750 mm)			E	Flat Top / 222			
4	40" (1000 mm)			G	Recess / 222			
				R	BF / 222 Bayonet			

**VSH & HSL
HOUSING RANGE
AVAILABLE**



BEVPOR PH Brewing


Filter Cartridges



Features

- Validated retention to spoilage organisms
- Inert materials of construction
- Easily integrity tested in-situ
- Integral depth prefiltration layer
- High filtration area

Performance Characteristics

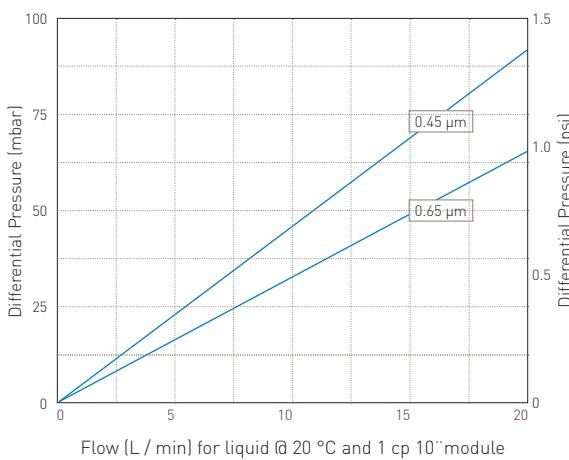

BEVPOR PH beer filters protect the unique characteristics of beer by removing yeast and other spoilage organisms to ensure microbial stability during cold stabilization.

The inert and highly asymmetric PES membrane provides validated microbial retention to typical spoilage organisms, whilst protecting the beer's organoleptic qualities to preserve a fresh taste and a long shelf-life once packaged.


The incorporation of an active prefilter layer, combined with an increased filtration area provides high beer flow rates, greater resistance to blockage and maximized service lifetime.

BEVPOR PH filters have been designed to provide the optimum solution to beer stabilization by providing increased process control with maximized operational efficiency.

Benefits

- Ensures effective microbial stabilization of beer
- Preserves the organoleptic qualities of the beer
- Assured filtration performance
- Increased throughput to blockage
- Maximized operational efficiency

Filtration Stage

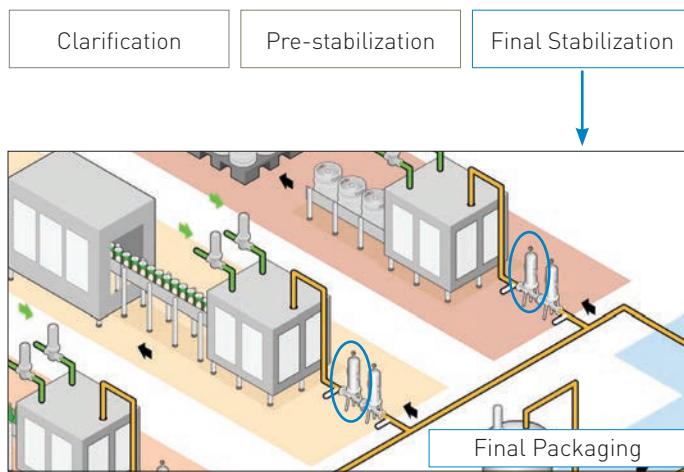



Specifications

Materials of Construction

Filtration Membrane:	Polyethersulphone
Prefilter Layer:	Polyester
Upstream Support:	Polyester
Downstream Support:	Polyester
Inner Support Core:	Polypropylene
Outer Protection Cage:	Polypropylene
End Caps:	Nylon
End Cap Insert:	316L Stainless Steel
O-rings:	Silicone / EPDM

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.



Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperature °C	Temperature °F	Max Forward dP (bar)	Max Forward dP (psi)
20	68	5.0	72.5
40	104	4.0	58.0
60	140	3.0	43.5
80	176	2.0	29.0
90	194	1.0	14.5
>100 (steam)	>212 (steam)	0.3	4.0

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.8 m² (8.61 ft²)

Cleaning and Sterilization

BEVPOR PH cartridges can be repeatedly steam sterilized in-situ or autoclaved at up to 130 °C (266 °F). They can be sanitized with hot water at up to 90 °C (194 °F) and are compatible with a wide range of chemicals. Please refer to our Clean-in-Place support guide or contact your local Parker representative for more information.

Integrity Test Data

All filters are flushed with pharmaceutical grade purified water prior to despatch. They are integrity tested to the following limits:

Diffusional Flow Test Parameters	Micron Rating
	0.45 0.65
Test Pressure (barg)	1.4 1.0
Test Pressure (psig)	20.0 15.0
Max Diffusional Flow per 10" [ml/min]	21.0 21.0

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number. Additionally, each module displays a unique serial number providing full manufacturing traceability.

Organism	LRV when challenged with a minimum of 10 ⁷ cfu per cm ²	
	0.45	0.65
<i>Saccharomyces cerevisiae</i>	FR	FR
<i>Brettanomyces bruxellensis</i>	FR	FR
<i>Lactobacillus brevis</i>	FR	FR
<i>Acetobacter oeni</i>	FR	FR
<i>Pseudomonas aeruginosa</i>	9.1	8.9
<i>Serratia marcescens</i>	FR	FR

*FR - Fully retentive during challenge

When expressed as titre reduction "FR" equates to >10⁷ per 10" module.

Ordering information

BPH - <input type="text"/>	<input type="text"/> - <input type="text"/> - <input type="text"/> A <input type="text"/>	<input type="text"/> - <input type="text"/> - <input type="text"/> <input type="text"/>
Code Length (Nominal)	Code Micron	Code End Cap (10 inch)
1 10" (250 mm)	04 0.45 µm	C Fin / 226 Bayonet
2 20" (500 mm)	06 0.65 µm	D Fin / 222
3 30" (750 mm)		E Flat Top / 222
4 40" (1000 mm)		R BF / 222 Bayonet
		S* Silicone
		E EPDM
		*Silicone O-rings supplied as standard

**VSH & HSL
HOUSING RANGE
AVAILABLE**



PREPOR NG

Brewing

Filter Cartridges


Parker | domnick hunter



Features

- Fully validated yeast removal and bacterial reduction
- Truly optimized graded density using unique Optimized Depth Construction Technology
- Mechanically strong and chemically resistant polypropylene construction designed for chemical CIP and backwash

Performance Characteristics

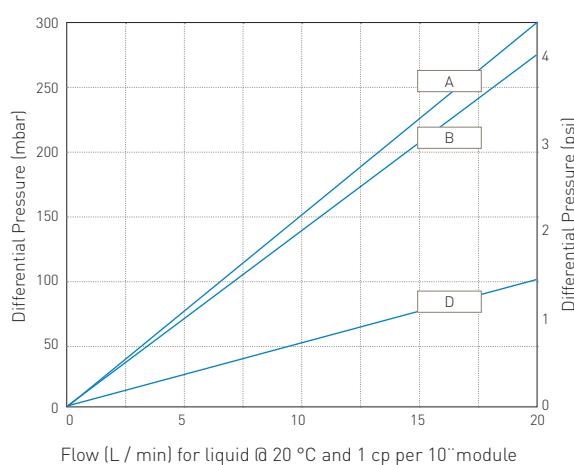

Parker domnick hunter's continued focus on process optimization and control has led to the development of a new range of prefilters to benefit the latter stages of beer stabilization processes.

Following upstream clarification stages there is a need to control the microbial loading of the bright beer before intermediate storage.


The new range of PREPOR NG filters has been specifically developed to remove yeast and particulate such as filter aids and haze components. The superior level of retention ensures that a consistent quality of brew is delivered to bright beer storage whilst also offering a greater level of membrane filter protection during cold stabilization.

The robust componentry is specifically designed to withstand caustic and backwash regeneration, making the filter stage a reliable and cost-effective solution to beer stabilization.

Benefits

- Greater control of beer quality prior to final stabilization processes
- Increased filtration capacity
- Increased service life when combined with regular CIP regeneration

Filtration Stage

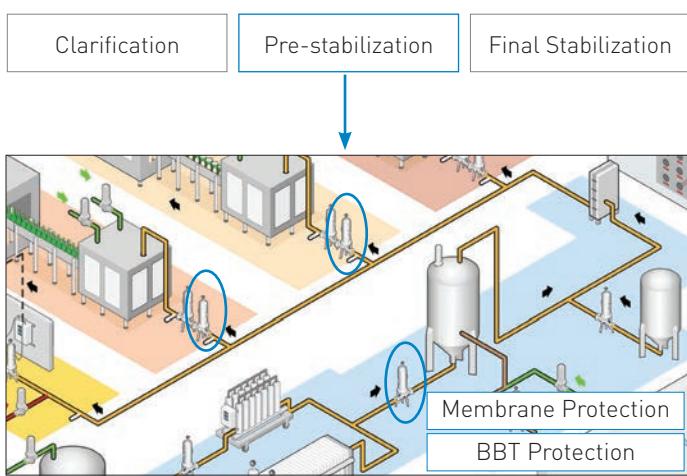



Specifications

Materials of Construction

Filtration Media:	Polypropylene
Upstream Support:	Polypropylene
Downstream Support:	Polypropylene
Inner Support Core:	Polypropylene
Outer Protection Cage:	Polypropylene
End Caps:	Polypropylene
End Cap Insert:	316L Stainless Steel
O-rings:	Silicone / EPDM

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.



Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperature °C	Temperature °F	Max Forward dP (bar)	Max Forward dP (psi)
20	68	5.0	72.5
40	104	4.0	58.0
60	140	3.0	43.5
80	176	2.0	29.0
90	194	1.0	14.5
>100 (steam)	>212 (steam)	0.3	4.0

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.5 m² (5.38 ft²)

Cleaning and Sterilization

PREPOR NG cartridges can be repeatedly steam sterilized in-situ or autoclaved up to 135 °C (275 °F). They can be sanitized with hot water up to 90 °C (194 °F), are compatible with a wide range of chemicals and can be backwashed. Please refer to our Clean-in-Place Support Guide or contact your local Parker representative for more information.

Manufacturing Traceability


Each filter cartridge displays the product name, product code and lot number.

Additionally, each module displays a unique serial number providing full manufacturing traceability.



Optimized Depth Construction (ODC) provides a unique graded density combining longer service life with absolute filtration efficiency.

Performance Benefits

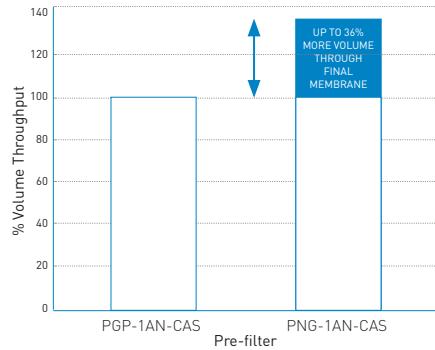

ODC technology combines fine particle retention with increased strength and stability to enhance the performance offered by the PREPOR range.

Ordering information

PNG - 	 - - - -
Code Length (Nominal)	Code Micron
1 10" (250 mm)	A 0.5
2 20" (500 mm)	B 0.6
3 30" (750 mm)	D 1.0
4 40" (1000 mm)	
Code End Cap (10 inch)	Code O-rings
C BF / 226 Bayonet	S Silicone
D Fin / 222	E EPDM
E Flat Top / 222	
G Recess / 222	
R BF / 222 Bayonet	

VSH & HSL
HOUSING RANGE
AVAILABLE



PEPLYN TF

Brewing


Filter Cartridges



Features

- Robust polypropylene construction designed for chemical CIP and backwash
- High effective filtration area
- A range of absolute retention ratings

Performance Characteristics

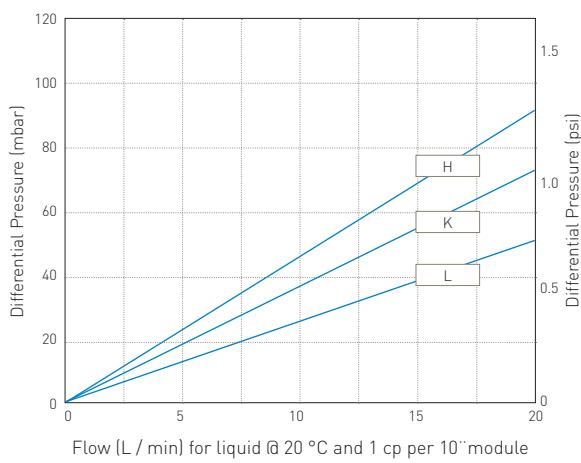


PEPLYN TF filters have been specifically designed to protect beer from the passage of filter aids and lees used in primary clarification processes. By combining absolute particle retention, high dirt holding capacity and resistance to blockage with ease of regeneration, PEPLYN TF filters provide the optimum solution for trap filtration.

The carefully constructed polypropylene media ensures insoluble particulate is captured on the surface of the filtration media in a way that it can be easily removed through backwashing. This feature, combined with the strong, rigid construction provides reliable filtration performance over extended operational lifetimes.

Benefits

- Extended service life when combined with regular CIP regeneration
- High beer flow and resistance to blockage under high loading
- Defined cut-off to powders and flexibility to optimize the filtration

Filtration Stage

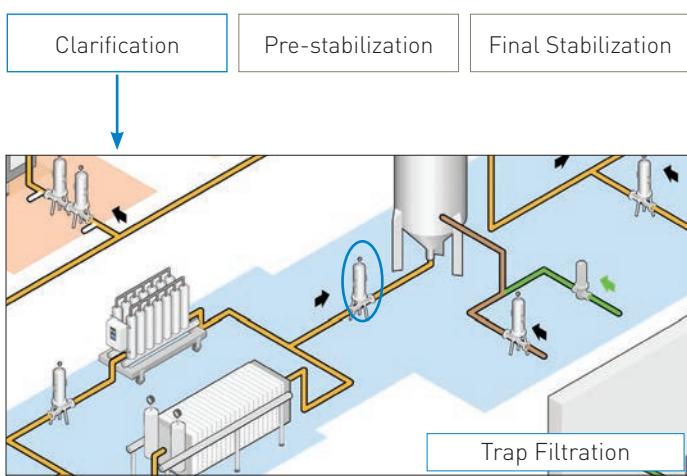



Specifications

Materials of Construction

Filtration Media:	Polypropylene
Upstream Support:	Polypropylene
Downstream Support:	Polypropylene
Inner Support Core:	Polypropylene
Outer Protection Cage:	Polypropylene
End Caps:	Polypropylene
End Cap Insert:	316L Stainless Steel
O-rings:	Silicone / EPDM

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.



Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperature °C	Temperature °F	Max Forward dP [bar]	Max Forward dP [psi]
20	68	5.0	72.5
40	104	4.0	58.0
60	140	3.0	43.5
80	176	2.0	29.0
90	194	1.0	14.5
>100 (steam)	>212 (steam)	0.3	4.0

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.7 m² (7.53 ft²)

Cleaning and Sterilization

PEPPLYN TF cartridges can be repeatedly steam sterilized in-situ or autoclaved up to 135 °C (275 °F). They can be sanitized with hot water up to 90 °C (194 °F), are compatible with a wide range of chemicals and can be backwashed. Please refer to our Clean-in-Place Support Guide or contact your local Parker representative for more information.

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number.

Additionally, each module displays a unique serial number providing full manufacturing traceability.

Retention Characteristics

The retention characteristics of PEPPLYN TF filter cartridges have been determined by a single-pass technique using suspensions of ISO 12103 Pt. 1 A2 Fine and A4 Course test dust in water.

Micron Rating at various efficiencies

Efficiency	>99.99%	99.98%	99.90%	99%	95%	90%
Beta Ratio	10000	5000	1000	100	20	10
H	5.00	4.70	4.50	3.50	2.30	1.00
K	10.00	8.00	7.00	4.80	3.80	2.80
L	15.00	12.00	10.00	7.20	6.00	4.50

Ordering information

PTF	-	<input type="text"/>	<input type="text"/>	N	-	<input type="text"/>	<input type="text"/>	A	<input type="text"/>	
Code		Length (Nominal)		Code		Micron		Code		End Cap (10 inch)
1		10" (250 mm)		H		5		C		Fin / 226 Bayonet
2		20" (500 mm)		K		10		D		Fin / 222
3		30" (750 mm)		L		15		E		Flat Top / 222
4		40" (1000 mm)						G		Recess / 222
								R		BF / 22 Bayonet
								S		Silicone
								E		EPDM

VSH & HSL
HOUSING RANGE
AVAILABLE





Parker domnick hunter commitments

Bottled Water collection


Multinational corporations and boutique producers of bottled water brands across the globe have partnered with Parker domnick hunter to successfully reach their quality and production requirements.


From plant to plant, every bottled water process is different depending upon; the category and branding of the finished bottled product, the local legislation of the intended market and the source of the water itself. These differences influence the performance expectations of the filtration systems and generate a wide degree of choice in approach to filtration. By understanding the specific requirements for each stage of the bottled water production process, Parker domnick hunter offer value added filtration solutions which deliver our commitments of; protecting water quality, reducing bottling costs and consumer and brand protection.

Parker domnick hunter provides tailored filtration solutions which meet the performance criteria required by a given process. Through a structured program of technical analysis available from a network of international support hubs, we work with end users to achieve their goals. Continued process optimization is our duty.

www.parker.com/dhbottledwater

Typical Process

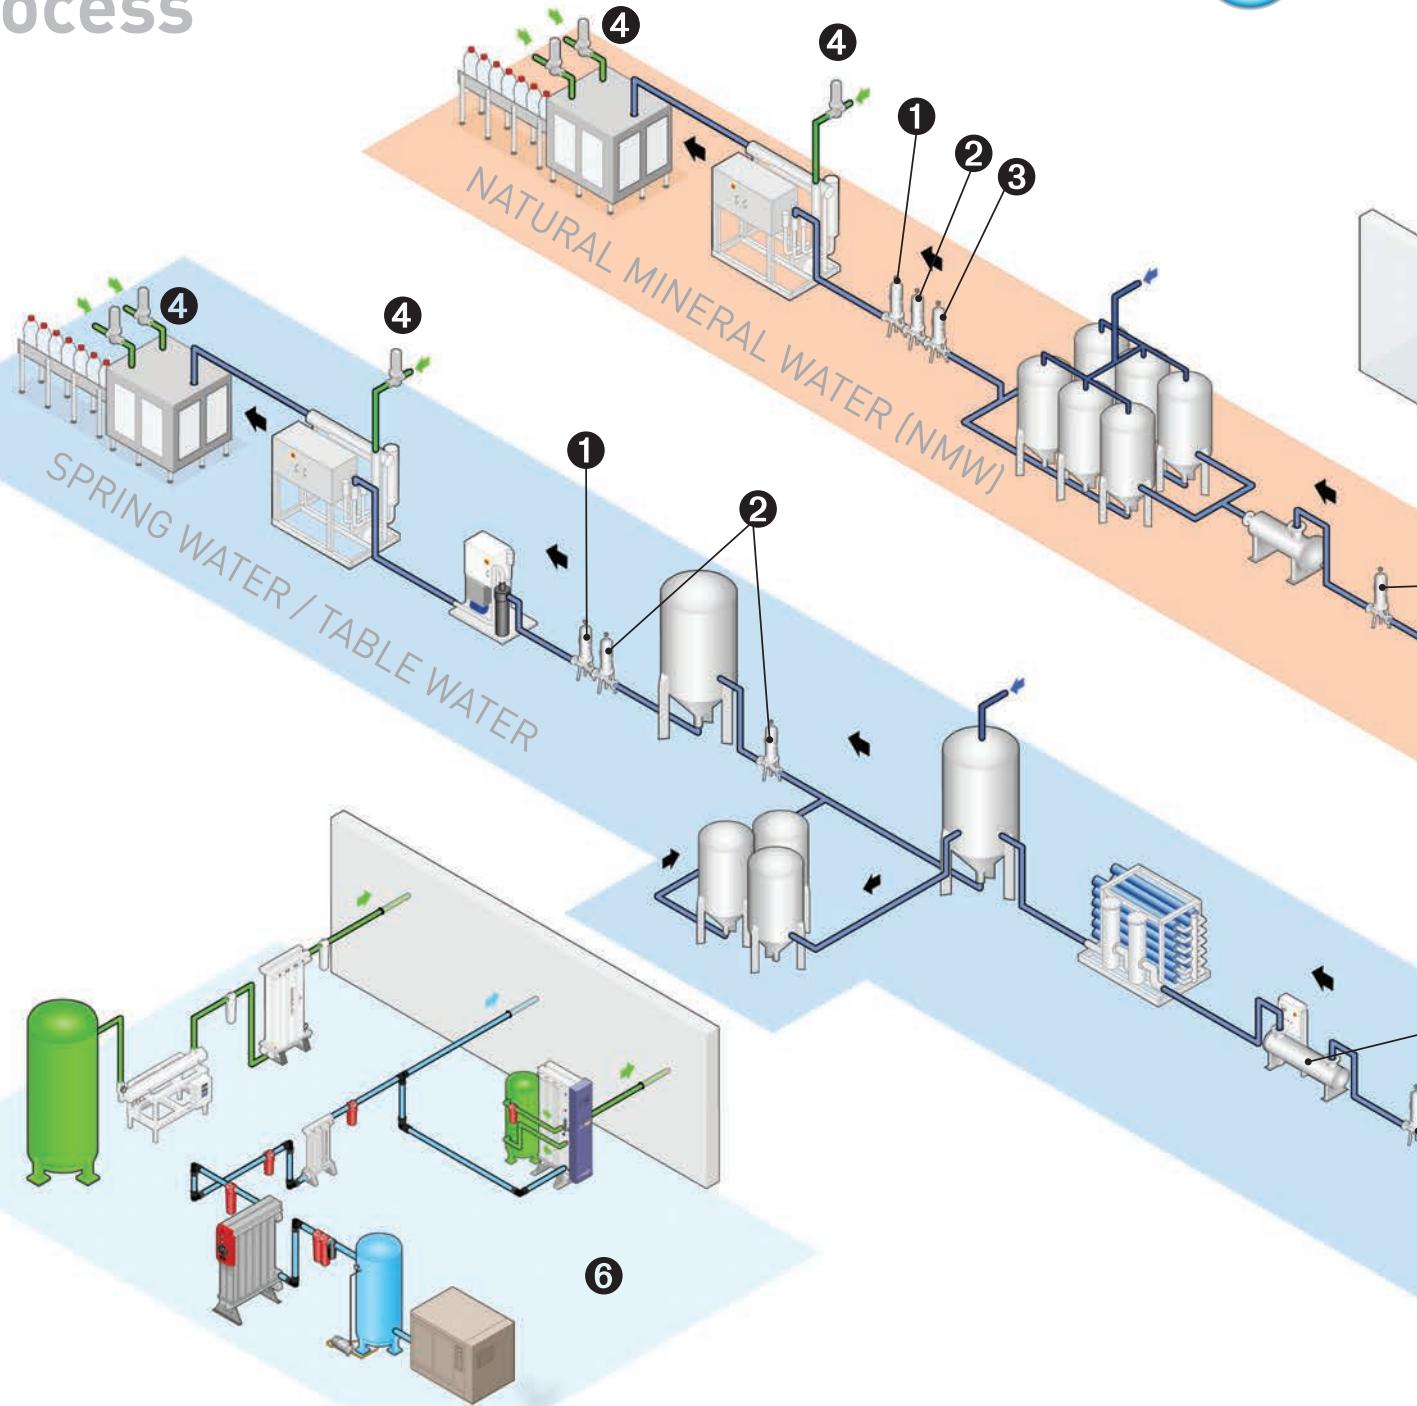

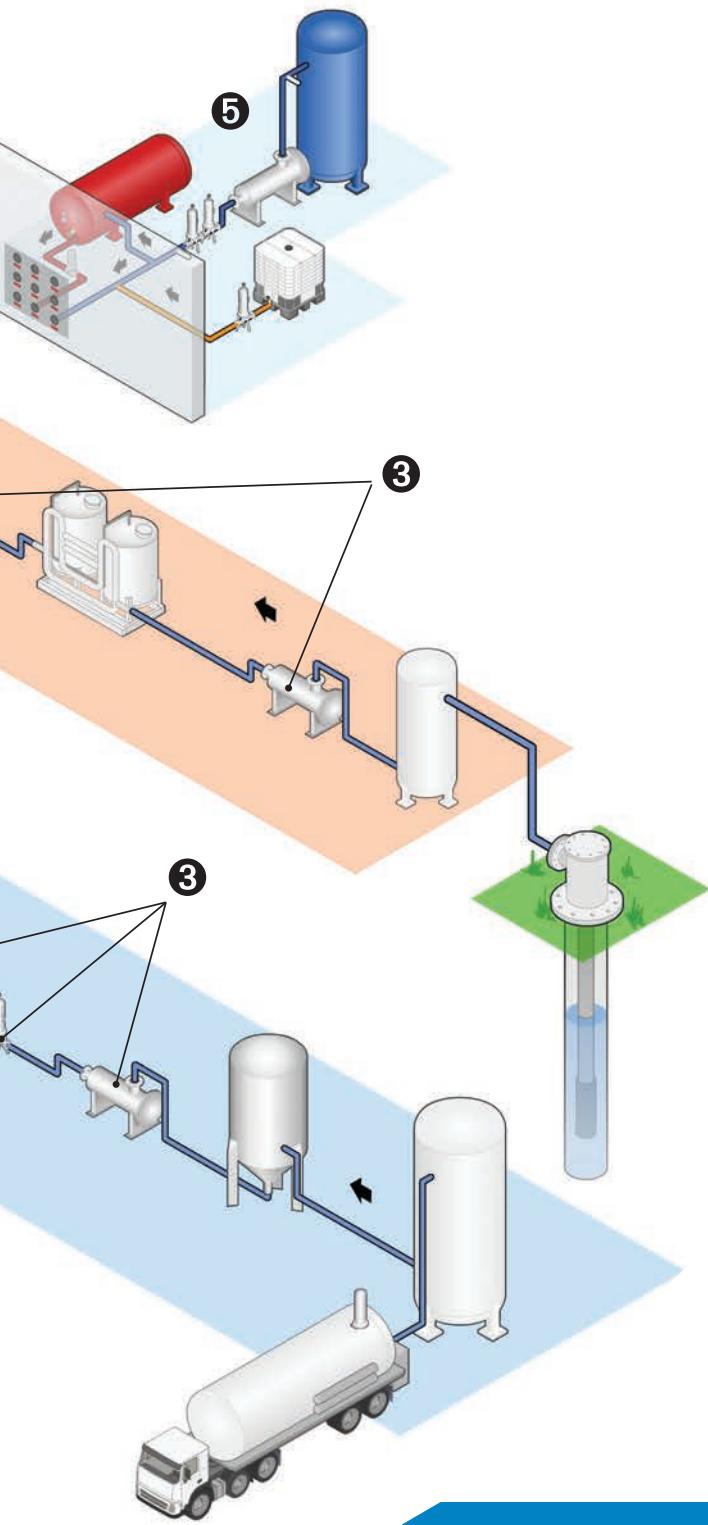

Specialized Water Applications

1 Final Stabilization

2 Pre-stabilization

3 Clarification

4 Sterilization of Gases

5 Water Utilities

6 Gas Utilities

Specific filtration requirements within the water bottling process dictate different design criteria for the filter systems. Parker domnick hunter have a range of specialized filtration systems designed to add value at each stage of the water bottling process.



BEVPOR MS Bottled Water

Filter Cartridges



Features

- Validated retention to industry regulated organisms
- Inert materials of construction
- Easily integrity tested in-situ

BEVPOR MS filters provide full retention to industry regulated, water contaminating organisms to ensure the micro-biological safety of bottled water.


The inert and highly asymmetric PES membrane provides validated microbial retention to regulated, contaminating organisms. The 0.2 μ m grade provides complete sterility in accordance to ASTM F838-05 requirements. Combined with hydrophilic properties for easy integrity testing, BEVPOR MS filters provide assured performance throughout their service life.

BEVPOR MS filters have been designed to provide a cost-effective solution to the microbial sterilization and stabilization of bottled water by providing increased process control with increased operational efficiency.


Benefits

- Ensures the safety of the water prior to bottling
- Protects the purity and essential characteristics of the source water
- Assured filtration performance

Performance Characteristics

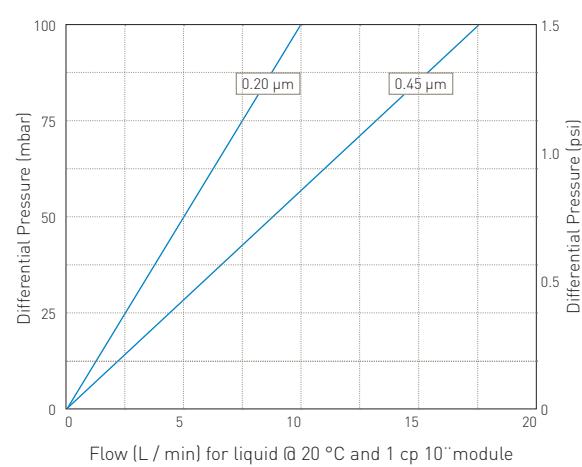

Filtration Stage

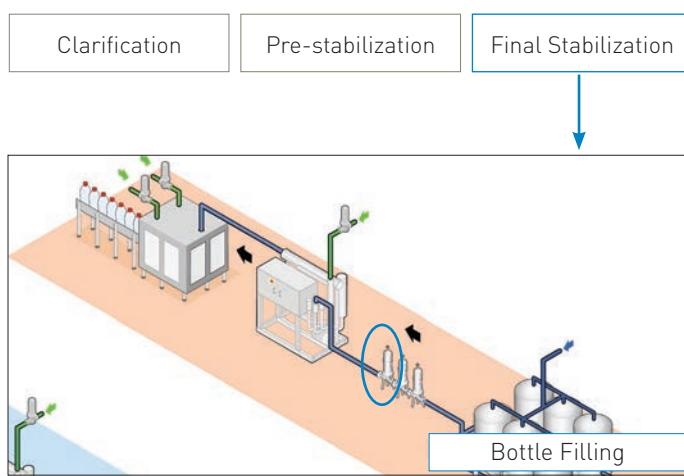



Specifications

Materials of Construction

Filtration Membrane:	Polyethersulphone
Upstream Support:	Polyester
Downstream Support:	Polyester
Inner Support Core:	Polypropylene
Outer Protection Cage:	Polypropylene
End Caps:	Nylon
End Cap Insert:	316L Stainless Steel
O-rings:	Silicone / EPDM

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.



Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperature °C	Max Forward dP (bar)	Max Forward dP (psi)
20	68	5.0
40	104	4.0
60	140	3.0
80	176	2.0
90	194	1.0
>100 (steam)	>212 (steam)	0.3

Effective Filtration Area (EFA)

10" (250mm) Up to 0.6m² (6.45ft²)

Cleaning and Sterilization

BEVPOR MS cartridges can be repeatedly steam sterilized in-situ or autoclaved at up to 130°C (266°F). They can be sanitized with hot water at up to 90°C (194°F) and are compatible with a wide range of chemicals. Please refer to our Clean-in-Place support guide or contact your local Parker representative for more information.

Retention Characteristics

0.2µm BEVPOR MS filters have been validated to provide sterile effluent after bacterial challenge testing following ASTM F838-05 methodology on 10" cartridges with more than 10⁷cfu per cm² using *Brevundimonas diminuta*.

In addition, challenges with the following EU regulated organisms have been performed.

Organism	LRV when challenged with a minimum of 10 ⁷ cfu per cm ²	
	0.20	0.45
<i>Serratia marcescens</i>	FR	FR
<i>Escherichia coli</i>	FR	FR
<i>Enterococcus faecalis</i>	FR	FR
<i>Clostridium perfringens</i>	FR	FR
<i>Pseudomonas aeruginosa</i>	FR	FR
<i>Brevundimonas diminuta</i>	FR	5

*FR - Fully retentive during challenge

When expressed as titre reduction "FR" equates to >10⁷ per 10" module.

Integrity Test Data

All filters are flushed with pharmaceutical grade purified water prior to despatch. They are integrity tested to the following limits:

Diffusional Flow Test Parameters	Micron Rating
0.20	0.45
Test Pressure (barg)	2.4
Test Pressure (psig)	35.0
Max Diffusional Flow per 10" (ml /min)	16.0
	1.7
	25.0

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number. Additionally, each module displays a unique serial number providing full manufacturing traceability.

Ordering information

BMS - <input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	A	<input type="text"/>
Code Length (Nominal)	Code Micron	Code End Cap (10 inch)	Code O-rings		
1 10" (250 mm)	02 0.20 µm	C Fin / 226 Bayonet	S Silicone		
2 20" (500 mm)	04 0.45 µm	D Fin / 222	E EPDM		
3 30" (750 mm)		E Flat Top / 222			
4 40" (1000 mm)		G Recess 222			
		R BF / 222 Bayonet			

**VSH & HSL
HOUSING RANGE
AVAILABLE**



BEVPOR MW Bottled Water

Filter Cartridges



Features

- Validated retention to industry regulated organisms
- Inert materials of construction
- Easily integrity tested in-situ
- Integral depth prefiltration layer

BEVPOR MW filters provide full retention to industry regulated, water contaminating organisms to ensure the microbiological safety of bottled water.


The inert and highly asymmetric PES membrane provides validated microbial retention to regulated, contaminating organisms. The 0.2 μ m grade provides complete sterility in accordance to ASTM F838-05 requirements. Combined with hydrophilic properties for easy integrity testing, BEVPOR MW filters provide assured performance throughout their service life.

The incorporation of an integral prefilter layer allows graded retention throughout the depth of the filter to resist blockage, resulting in increased capacity and long service lifetimes. BEVPOR MW filters have been designed to provide a cost-effective solution to the microbial sterilization and stabilization of bottled water by providing increased process control with increased operational efficiency.


Benefits

- Ensures the safety of the water prior to bottling
- Protects the purity and essential characteristics of the source water
- Assured filtration performance
- Increased throughput to blockage

Performance Characteristics

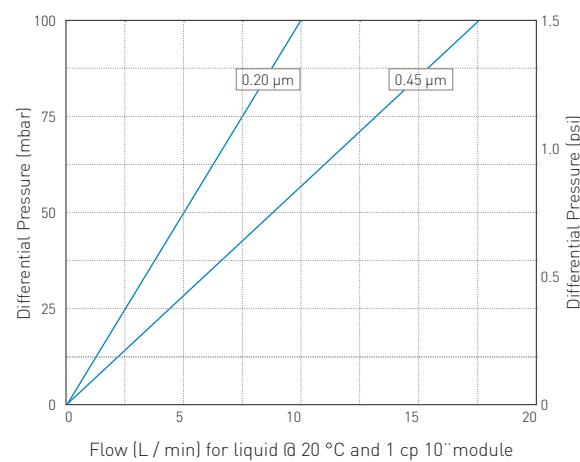

Filtration Stage

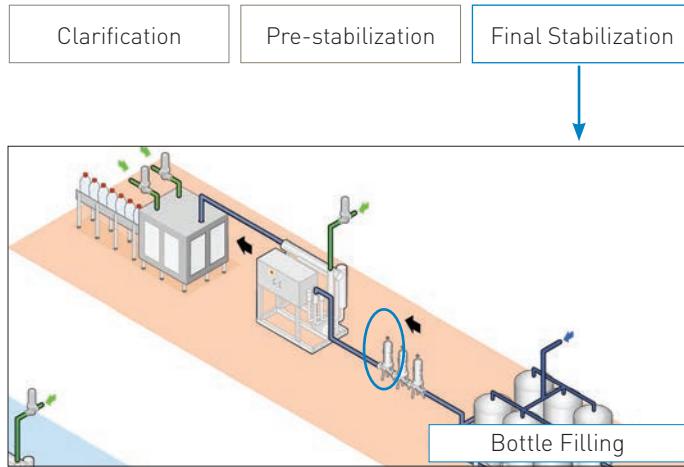



Specifications

Materials of Construction

■ Filtration Membrane:	Polyethersulphone
■ Prefilter Layer:	Polyester
■ Upstream Support:	Polyester
■ Downstream Support:	Polyester
■ Inner Support Core:	Polypropylene
■ Outer Protection Cage:	Polypropylene
■ End Caps:	Nylon
■ End Cap Insert:	316L Stainless Steel
■ O-rings:	Silicone / EPDM

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.



Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperature °C	Temperature °F	Max Forward dP [bar]	Max Forward dP [psi]
20	68	5.0	72.5
40	104	4.0	58.0
60	140	3.0	43.5
80	176	2.0	29.0
90	194	1.0	14.5
>100 (steam)	>212 (steam)	0.3	4.0

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.6 m² (6.45 ft²)

Cleaning and Sterilization

BEVPOR MW cartridges can be repeatedly steam sterilized in-situ or autoclaved at up to 130 °C (266 °F). They can be sanitized with hot water at up to 90 °C (194 °F) and are compatible with a wide range of chemicals. Please refer to our Clean-in-Place support guide or contact your local Parker representative for more information.

Retention Characteristics

0.2µm BEVPOR MW filters have been validated to provide sterile effluent after bacterial challenge testing following ASTM F838-05 methodology on 10" cartridges with more than 10⁷cfu per cm² using *Brevundimonas diminuta*.

In addition, challenges with the following EU regulated organisms have been performed.

Organism	LRV when challenged with a minimum of 10 ⁷ cfu per cm ²	
	0.20	0.45
<i>Serratia marcescens</i>	FR	FR
<i>Escherichia coli</i>	FR	FR
<i>Enterococcus faecalis</i>	FR	FR
<i>Clostridium perfringens</i>	FR	FR
<i>Pseudomonas aeruginosa</i>	FR	FR
<i>Brevundimonas diminuta</i>	FR	5

*FR - Fully retentive during challenge

When expressed as titre reduction "FR" equates to >10⁷ per 10" module.

Integrity Test Data

All filters are flushed with pharmaceutical grade purified water prior to despatch. They are integrity tested to the following limits:

Diffusional Flow Test Parameters	Micron Rating
0.20	0.45
Test Pressure (barg)	2.4
Test Pressure (psig)	35.0
Max Diffusional Flow per 10" (ml /min)	16.0
	16.0

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number. Additionally, each module displays a unique serial number providing full manufacturing traceability.

Ordering information

BMW - <input type="text"/>	<input type="text"/>	- <input type="text"/>	<input type="text"/> A <input type="text"/>	<input type="text"/>
Code Length (Nominal)	Code Micron	Code End Cap (10 inch)	Code O-rings	
1 10" (250 mm)	02 0.20 µm	C Fin / 226 Bayonet	S Silicone	
2 20" (500 mm)	04 0.45 µm	D Fin / 222	E EPDM	
3 30" (750 mm)		E Flat Top / 222		
4 40" (1000 mm)		G Recess / 222		
		R BF / 222 Bayonet		

**VSH & HSL
HOUSING RANGE
AVAILABLE**



BEVPOR MH Bottled Water


Filter Cartridges



Features

- Validated retention to industry regulated organisms
- Inert materials of construction
- Easily integrity tested in-situ
- Integral depth prefiltration layer
- High filtration area

Performance Characteristics

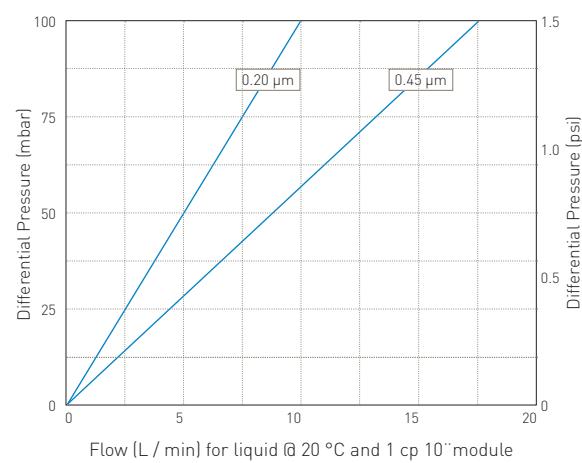

BEVPOR MH filters provide full retention to industry regulated, water contaminating organisms to ensure the microbiological safety of bottled water.


The inert and highly asymmetric PES membrane provides validated microbial retention to regulated, contaminating organisms. The 0.2μm grade provides complete sterility in accordance to ASTM F838-05 requirements. Combined with hydrophilic properties for easy integrity testing, BEVPOR MH filters provide assured performance throughout their service life. The incorporation of an active prefilter layer, combined with an increased filtration area provides high water flow rates, greater resistance to blockage and maximized service lifetimes.

BEVPOR MH filters have been designed to provide the optimum solution to the microbial sterilization and stabilization of bottled water by providing increased process control with increased operational efficiency.

Benefits

- Ensures the safety of the water prior to bottling
- Protects the purity and essential characteristics of the source water
- Assured filtration performance
- Increased throughput to blockage

Filtration Stage

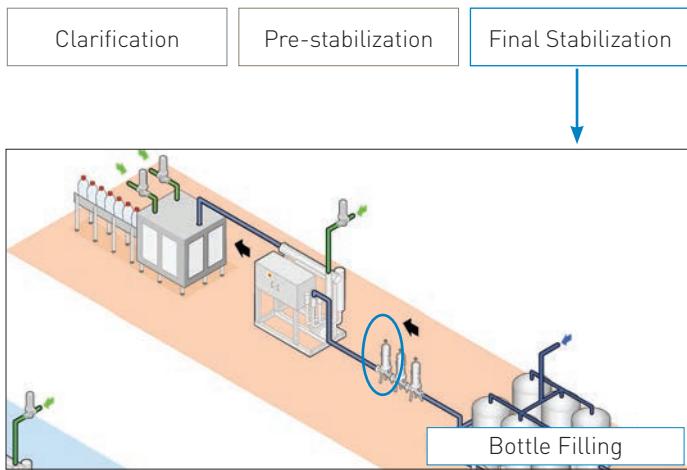



Specifications

Materials of Construction

Filtration Membrane:	Polyethersulphone
Prefilter Layer:	Polyester
Upstream Support:	Polyester
Downstream Support:	Polyester
Inner Support Core:	Polypropylene
Outer Protection Cage:	Polypropylene
End Caps:	Nylon
End Cap Insert:	316L Stainless Steel
O-rings:	Silicone / EPDM

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.



Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperature °C	Temperature °F	Max Forward dP (bar)	Max Forward dP (psi)
20	68	5.0	72.5
40	104	4.0	58.0
60	140	3.0	43.5
80	176	2.0	29.0
90	194	1.0	14.5
>100 (steam)	>212 (steam)	0.3	4.0

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.8 m² (8.61 ft²)

Cleaning and Sterilization

BEVPOR MH cartridges can be repeatedly steam sterilized in-situ or autoclaved at up to 130 °C (266 °F). They can be sanitized with hot water at up to 90 °C (194 °F) and are compatible with a wide range of chemicals. Please refer to our Clean-in-Place support guide or contact your local Parker representative for more information.

Retention Characteristics

0.2µm BEVPOR MH filters have been validated to provide sterile effluent after bacterial challenge testing following ASTM F838-05 methodology on 10" cartridges with more than 10⁷cfu per cm² using *Brevundimonas diminuta*.

In addition, challenges with the following EU regulated organisms have been performed.

Organism	LRV when challenged with a minimum of 10 ⁷ cfu per cm ²	
	0.20	0.45
<i>Serratia marcescens</i>	FR	FR
<i>Escherichia coli</i>	FR	FR
<i>Enterococcus faecalis</i>	FR	FR
<i>Clostridium perfringens</i>	FR	FR
<i>Pseudomonas aeruginosa</i>	FR	FR
<i>Brevundimonas diminuta</i>	FR	5

*FR - Fully retentive during challenge

When expressed as titre reduction "FR" equates to >10⁷ per 10" module.

Integrity Test Data

All filters are flushed with pharmaceutical grade purified water prior to despatch. They are integrity tested to the following limits:

Diffusional Flow Test Parameters	Micron Rating
0.20	0.45
Test Pressure (barg)	2.4
Test Pressure (psig)	35.0
Max Diffusional Flow per 10" (ml/min)	21.0
	21.0

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number. Additionally, each module displays a unique serial number providing full manufacturing traceability.

Ordering information

BMH - <input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	A <input type="text"/>	<input type="text"/>
Code Length (Nominal)	Code Micron	Code End Cap (10 inch)	Code O-rings		
1 10" (250 mm)	02 0.20 µm	C Fin / 226 Bayonet	S Silicone		
2 20" (500 mm)	04 0.45 µm	D Fin / 222	E EPDM		
3 30" (750 mm)		E Flat Top / 222			
4 40" (1000 mm)		G Recess / 222			
		R BF / 22 Bayonet			

**VSH & HSL
HOUSING RANGE
AVAILABLE**



BEVPOR PS Bottled Water


Filter Cartridges



Features

- Validated retention to industry regulated micro-organisms
- Inert material of construction
- Easily integrity tested in-situ

Performance Characteristics

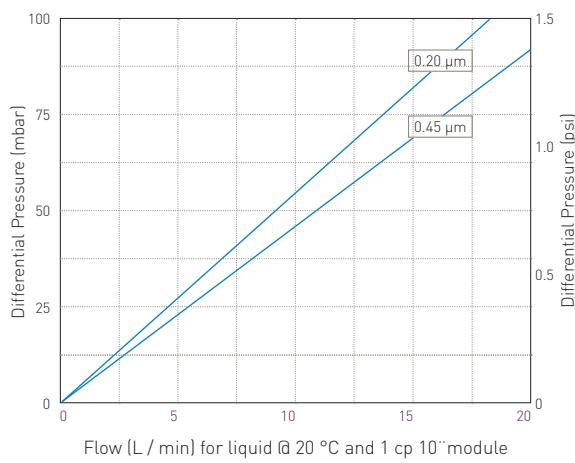

BEVPOR PS filters ensure the microbiological safety of bottled water whilst protecting the purity and essential characteristics of the source water.


The inert and highly asymmetric PES membrane provides validated microbial retention to industry regulated contaminating organisms. Combined with hydrophilic properties for easy integrity testing, BEVPOR PS filters provide assured performance throughout their service life.

BEVPOR PS filters have been designed to provide a cost-effective solution to the microbial stabilization of bottled water by providing increased process control with increased operational efficiency.

Benefits

- Ensures the safety of the water prior to bottling
- Protects the purity and essential characteristics of the source water
- Assured filtration performance

Filtration Stage

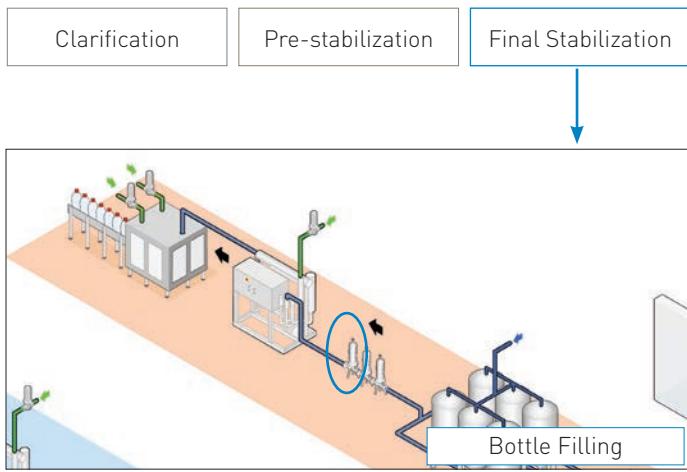



Specifications

Materials of Construction

Filtration Membrane:	Polyethersulphone
Upstream Support:	Polyester
Downstream Support:	Polyester
Inner Support Core:	Polypropylene
Outer Protection Cage:	Polypropylene
End Caps:	Nylon
End Cap Insert:	316L Stainless Steel
O-rings:	Silicone / EPDM

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.



Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperature °C	Temperature °F	Max Forward dP (bar)	Max Forward dP (psi)
20	68	5.0	72.5
40	104	4.0	58.0
60	140	3.0	43.5
80	176	2.0	29.0
90	194	1.0	14.5
>100 (steam)	>212 (steam)	0.3	4.0

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.6 m² (6.45 ft²)

Cleaning and Sterilization

BEVPOR PS cartridges can be repeatedly steam sterilized in-situ or autoclaved at up to 130 °C (266 °F). They can be sanitized with hot water at up to 90 °C (194 °F) and are compatible with a wide range of chemicals. Please refer to our Clean-in-Place support guide or contact your local Parker representative for more information.

Retention Characteristics

0.2µm BEVPOR PS filters have been validated to provide sterile effluent after bacterial challenge testing following ASTM F838-05 methodology on 10" cartridges with more than 10⁷cfu per 10" cartridge using *Brevundimonas diminuta*.

In addition, challenges with the following EU regulated organisms have been performed.

Organism	LRV when challenged with a minimum of 10 ⁷ cfu per cm ²	
	0.20	0.45
<i>Serratia marcescens</i>	FR	FR
<i>Escherichia coli</i>	FR	FR
<i>Enterococcus faecalis</i>	FR	FR
<i>Clostridium perfringens</i>	FR	FR
<i>Pseudomonas aeruginosa</i>	FR	9.1
<i>Brevundimonas diminuta</i>	5	-

*FR - Fully retentive during challenge

When expressed as titre reduction "FR" equates to >10⁷ per 10" module.

Integrity Test Data

All filters are flushed with pharmaceutical grade purified water prior to despatch. They are integrity tested to the following limits:

Diffusional Flow Test Parameters	Micron Rating
0.20	0.45
Test Pressure (barg)	1.7
Test Pressure (psig)	25.0
Max Diffusional Flow per 10" (ml/min)	16.0

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number.

Additionally, each module displays a unique serial number providing full manufacturing traceability.

Ordering information

BPS - <input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	A	<input type="text"/>
Code Length (Nominal)	Code Micron	Code End Cap (10 inch)	Code O-rings		
1 10" (250 mm)	02 0.20 µm	C Fin / 226 Bayonet	S Silicone		
2 20" (500 mm)	04 0.45 µm	D Fin / 222	E EPDM		
3 30" (750 mm)		E Flat Top / 222			
4 40" (1000 mm)		G Recess 222			
		R BF / 22 Bayonet			

**VSH & HSL
HOUSING RANGE
AVAILABLE**



BEVPOR PW Bottled Water

Filter Cartridges



Features

- Validated retention to industry regulated micro-organisms
- Inert materials of construction
- Easily integrity tested in-situ
- Integral depth prefiltration layer

BEVPOR PW filters ensure the microbiological safety of bottled water whilst protecting the purity and essential characteristics of the source water.

The inert and highly asymmetric PES membrane provides validated microbial retention to industry regulated contaminating organisms. Combined with hydrophilic properties for easy integrity testing, BEVPOR PW filters provide assured performance throughout their service life.


The incorporation of an integral prefilter layer allows graded retention throughout the depth of the filter to resist blockage, resulting in increased capacity and long service lifetime.

BEVPOR PW filters have been designed to provide a cost-effective solution to the microbial stabilization of bottled water by providing increased process control with increased operational efficiency.


Benefits

- Ensures the safety of the water prior to bottling
- Protects the purity and essential characteristics of the source water
- Assured filtration performance
- Increased throughput to blockage

Performance Characteristics

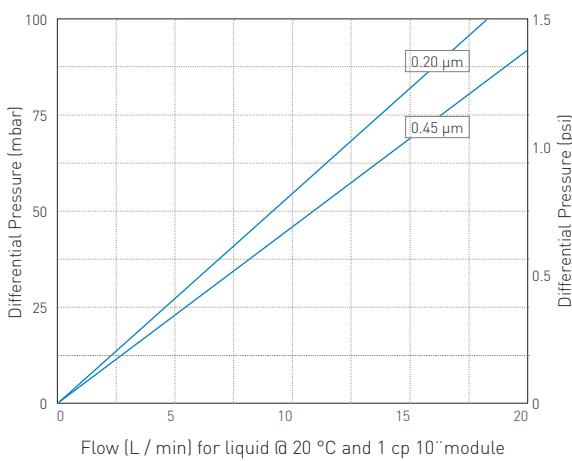

Filtration Stage

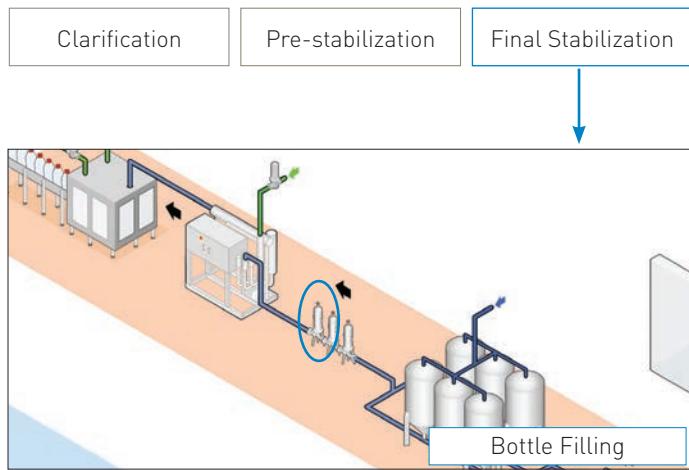



Specifications

Materials of Construction

■ Filtration Membrane:	Polyethersulphone
■ Prefilter Layer:	Polyester
■ Upstream Support:	Polyester
■ Downstream Support:	Polyester
■ Inner Support Core:	Polypropylene
■ Outer Protection Cage:	Polypropylene
■ End Caps:	Nylon
■ End Cap Insert:	316L Stainless Steel
■ O-rings:	Silicone / EPDM

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.



Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperature °C	Temperature °F	Max Forward dP [bar]	Max Forward dP [psi]
20	68	5.0	72.5
40	104	4.0	58.0
60	140	3.0	43.5
80	176	2.0	29.0
90	194	1.0	14.5
>100 (steam)	>212 (steam)	0.3	4.0

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.6 m² (6.45 ft²)

Cleaning and Sterilization

BEVPOR PW cartridges can be repeatedly steam sterilized in-situ or autoclaved at up to 130 °C (266 °F). They can be sanitized with hot water at up to 90 °C (194 °F) and are compatible with a wide range of chemicals. Please refer to our Clean-in-Place support guide or contact your local Parker representative for more information.

Retention Characteristics

0.2µm BEVPOR PW filters have been validated to provide sterile effluent after bacterial challenge testing following ASTM F838-05 methodology on 10" cartridges with more than 10⁷cfu per 10" cartridge using *Brevundimonas diminuta*.

In addition, challenges with the following EU regulated organisms have been performed.

Organism	LRV when challenged with a minimum of 10 ⁷ cfu per cm ²	
	0.20	0.45
<i>Serratia marcescens</i>	FR	FR
<i>Escherichia coli</i>	FR	FR
<i>Enterococcus faecalis</i>	FR	FR
<i>Clostridium perfringens</i>	FR	FR
<i>Pseudomonas aeruginosa</i>	FR	9.1
<i>Brevundimonas diminuta</i>	5	-

*FR - Fully retentive during challenge

When expressed as titre reduction "FR" equates to >10⁷ per 10" module.

Integrity Test Data

All filters are flushed with pharmaceutical grade purified water prior to despatch. They are integrity tested to the following limits:

Diffusional Flow Test Parameters	Micron Rating
0.20	0.45
Test Pressure (barg)	1.7
Test Pressure (psig)	25.0
Max Diffusional Flow per 10" (ml /min)	16.0
	16.0

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number. Additionally, each module displays a unique serial number providing full manufacturing traceability.

Ordering information

BPW - 	 - - - A -
Code Length (Nominal)	Code Micron

1	10" (250 mm)	02	0.20 µm	C	Fin / 226 Bayonet	S*	Silicone
2	20" (500 mm)	04	0.45 µm	D	Fin / 222	E	EPDM
3	30" (750 mm)			E	Flat Top / 222		
4	40" (1000 mm)			G	Recess / 222		
				R	BF / 222 Bayonet		

*Silicone O-rings supplied as standard

**VSH & HSL
HOUSING RANGE
AVAILABLE**



BEVPOR PH Bottled Water


Filter Cartridges



Features

- Validated retention to industry regulated micro-organisms
- Inert materials of construction
- Easily integrity tested in-situ
- Integral depth prefiltration layer
- High filtration area

Performance Characteristics

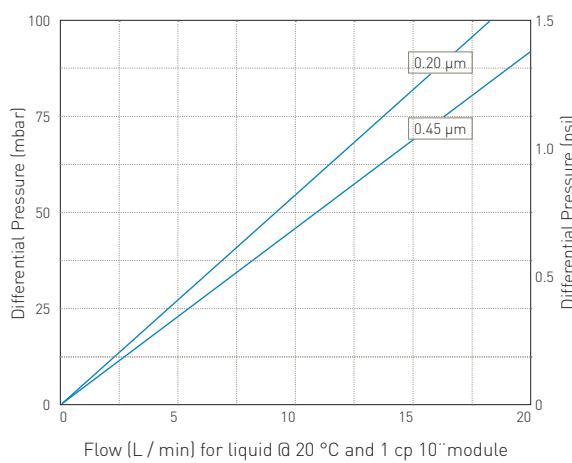

BEVPOR PH filters ensure the microbiological safety of bottled water whilst protecting the purity and essential characteristics of the source water.

The inert and highly asymmetric PES membrane provides validated microbial retention to industry regulated contaminating organisms. Combined with hydrophilic properties for easy integrity testing, BEVPOR PH filters provide assured performance throughout their service life.


The incorporation of an integral prefilter layer, combined with an increased filtration area, provides high water flow rates, greater resistance to blockage and maximized service lifetime.

BEVPOR PH filters have been designed to provide the optimum solution to the microbial stabilization of bottled water by providing increased process control with increased operational efficiency.

Benefits

- Ensures the safety of the water prior to bottling
- Protects the purity and essential characteristics of the source water
- Assured filtration performance
- Increased throughput to blockage
- High water flow and maximized operational efficiency

Filtration Stage

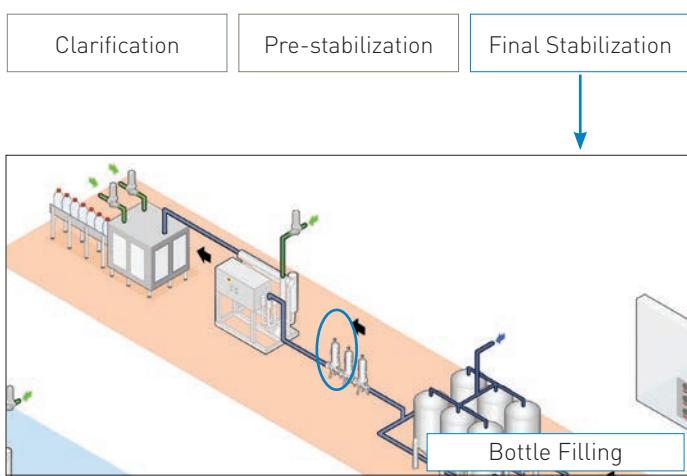



Specifications

Materials of Construction

Filtration Membrane:	Polyethersulphone
Prefilter Layer:	Polyester
Upstream Support:	Polyester
Downstream Support:	Polyester
Inner Support Core:	Polypropylene
Outer Protection Cage:	Polypropylene
End Caps:	Nylon
End Cap Insert:	316L Stainless Steel
O-rings:	Silicone / EPDM

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.



Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperature °C	Temperature °F	Max Forward dP (bar)	Max Forward dP (psil)
20	68	5.0	72.5
40	104	4.0	58.0
60	140	3.0	43.5
80	176	2.0	29.0
90	194	1.0	14.5
>100 (steam)	>212 (steam)	0.3	4.0

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.8 m² (8.61 ft²)

Cleaning and Sterilization

BEVPOR PH cartridges can be repeatedly steam sterilized in-situ or autoclaved at up to 130 °C (266 °F). They can be sanitized with hot water at up to 90 °C (194 °F) and are compatible with a wide range of chemicals. Please refer to our Clean-in-Place support guide or contact your local Parker representative for more information.

Retention Characteristics

0.2µm BEVPOR PH filters have been validated to provide sterile effluent after bacterial challenge testing following ASTM F838-05 methodology on 10" cartridges with more than 10⁷cfu per 10" cartridge using *Brevundimonas diminuta*.

In addition, challenges with the following EU regulated organisms have been performed.

Organism	LRV when challenged with a minimum of 10 ⁷ cfu per cm ²	
	0.20	0.45
<i>Serratia marcescens</i>	FR	FR
<i>Escherichia coli</i>	FR	FR
<i>Enterococcus faecalis</i>	FR	FR
<i>Clostridium perfringens</i>	FR	FR
<i>Pseudomonas aeruginosa</i>	FR	9.1

*FR - Fully retentive during challenge

When expressed as titre reduction "FR" equates to >10⁷ per 10" module.

Integrity Test Data

All filters are flushed with pharmaceutical grade purified water prior to despatch. They are integrity tested to the following limits:

Diffusional Flow Test Parameters	Micron Rating
0.20	0.45
Test Pressure (barg)	1.7
Test Pressure (psig)	25.0
Max Diffusional	20.0
Flow per 10" (ml /min)	21.0
	21.0

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number. Additionally, each module displays a unique serial number providing full manufacturing traceability.

Ordering information

BPH - <input type="text"/>	<input type="text"/>	- <input type="text"/>	<input type="text"/> A <input type="text"/>	<input type="text"/>
Code Length (Nominal)	Code Micron	Code End Cap (10 inch)	Code O-rings	
1 10" (250 mm)	02 0.20 µm	C Fin / 226 Bayonet	S Silicone	
2 20" (500 mm)	04 0.45 µm	D Fin / 222	E EPDM	
3 30" (750 mm)		E Flat Top / 222		
4 40" (1000 mm)		G Recess / 222		
		R BF / 222 Bayonet		

**VSH & HSL
HOUSING RANGE
AVAILABLE**



PREPOR NG Bottled Water

Filter Cartridges


Parker | **domnick**
hunter



Features

- Fully validated microbial reduction
- Truly optimized graded density using unique Optimized Depth Construction Technology
- Mechanically strong and chemically resistant polypropylene construction

Performance Characteristics

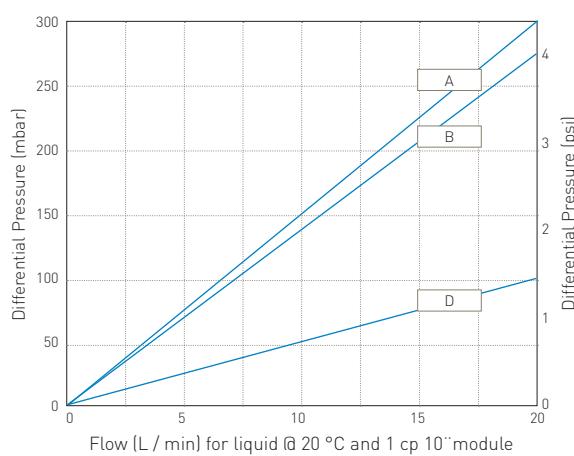

Parker domnick hunter's continued focus on process optimization has led to the development of a new range of prefilters which offer superior levels of membrane filter protection and reduced running costs for bottling plants worldwide.


Throughout the bottling process it is important to protect the water from external contamination. The PREPOR NG filter has been carefully designed and constructed to protect the purity and essential characteristics of the source water whilst reducing colloidal particulate and regulated micro-organisms over extended periods of use. This in turn reduces the potential for biofilm formation in downstream systems and significantly improves the operating lifetime of membrane final filters.

Increased resistance to frequent SIP / CIP cycles combined with the inherent strength and robust construction provides stable retention through the filter's lifetime.

Benefits

- Reduced risk of microbial contamination during intermediate storage
- Improved retention efficiency and dirt holding capacity
- Stable, reliable retention efficiency throughout the service life

Filtration Stage

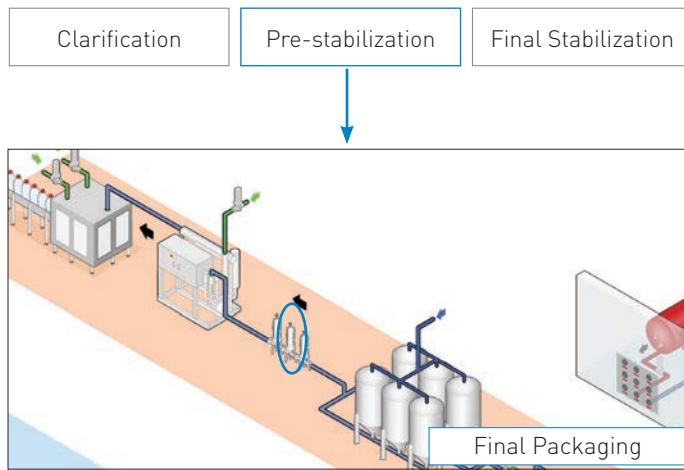



Specifications

Materials of Construction

Filtration Media:	Polypropylene
Upstream Support:	Polypropylene
Downstream Support:	Polypropylene
Inner Support Core:	Polypropylene
Outer Protection Cage:	Polypropylene
End Caps:	Polypropylene
End Cap Insert:	316L Stainless Steel
O-rings:	Silicone / EPDM

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.



Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperature °C	Max Forward dP °F	(bar)	(psi)
20	68	5.0	72.5
40	104	4.0	58.0
60	140	3.0	43.5
80	176	2.0	29.0
90	194	1.0	14.5
>100 (steam)	>212 (steam)	0.3	4.0

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.5 m² (5.38 ft²)

Cleaning and Sterilization

PREPOR NG cartridges can be repeatedly steam sterilized in-situ or autoclaved up to 135 °C (275 °F). They can be sanitized with hot water up to 90 °C (194 °F), are compatible with a wide range of chemicals and can be backwashed. Please refer to our Clean-in-Place Support Guide or contact your local Parker representative for more information.

Manufacturing Traceability


Each filter cartridge displays the product name, product code and lot number.

Additionally, each module displays a unique serial number providing full manufacturing traceability.



Optimized Depth Construction (ODC) provides a unique graded density combining longer service life with absolute filtration efficiency.

Performance Benefits

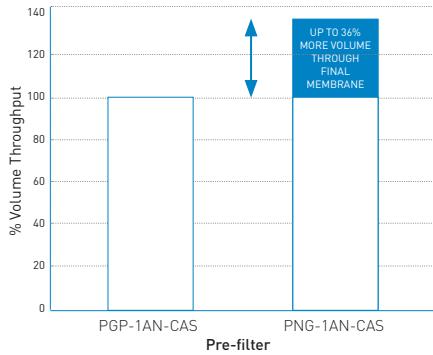

ODC technology combines fine particle retention with increased strength and stability to enhance the performance offered by the PREPOR range.

Ordering information

PNG	-	<input type="text"/>	<input type="text"/>	N	-	<input type="text"/>	<input type="text"/>	A	<input type="text"/>
<hr/>									
Code Length (Nominal)					Code Micron				
1 10" (250 mm)					A 0.5				
1	10"	(250 mm)			B	0.6			
2	20"	(500 mm)			D	1.0			
3	30"	(750 mm)			Code End Cap (10 inch)				
4	40"	(1000 mm)			C	BF / 226 Bayonet			
					D	Fin / 222			
					E	Flat Top / 222			
					F	Recess / 222			
					G				
					R	BF / 222 Bayonet			
					Code O-rings				
					S	Silicone			
					E	EPDM			

VSH & HSL
HOUSING RANGE
AVAILABLE





Parker domnick hunter commitments

Cider collection

Cider choice and consumption continue to grow and quality specifications are increasing to reflect consumer needs and the extended shelf-life required for products that travel further afield. Aside of live and cloudy ciders, the emphasis for the majority of volume produced is to provide consumers with a fresh tasting, visually brilliant product.

Key to achieving these requirements is the efficacy of filtration throughout the process. For products that are to be pasteurised filtration of the final product is primarily to provide visual clarity, although use of stabilizing grade filters also provides a dual barrier approach to microbiological quality. For cold stabilized products, whether in glass, PET or keg, the filter must provide a guarantee of protection against microbiological instability. Throughout the process, microfiltration plays a large role in assuring the quality of ancillary fluids such as carbon dioxide, steam and water.

Parker domnick hunter has partnered with cider makers and packagers to meet their changing needs over the years. Through a structured application-led approach, we can provide options for various levels of clarification and microbiological stability throughout the production process, whilst demonstrating proven cost reductions through operational efficiencies and filter design. Quality, economy and continuing process optimisation are our ongoing commitments.

www.parker.com/dhcider



BEVPOR PS Cider

Filter Cartridges



Features

- Validated retention to spoilage organisms
- Inert material of construction
- Easily integrity tested in-situ

BEVPOR PS cider filters protect the unique characteristics of cider by removing yeast and other spoilage organisms to ensure microbial stability during cold stabilization.


The inert and highly asymmetric PES membrane provides validated microbial retention to typical spoilage organisms, whilst protecting the cider's organoleptic qualities to preserve a fresh taste and a long shelf-life once packaged. Combined with hydrophilic properties for easy integrity testing, BEVPOR PS filters provide assured performance throughout their service life.

BEVPOR PS filters have been designed to provide a cost-effective solution to cider stabilization by providing increased process control with increased operational efficiency.


Benefits

- Ensures effective microbial stabilization of cider
- Preserves the organoleptic qualities of the cider
- Assured filtration performance

Performance Characteristics

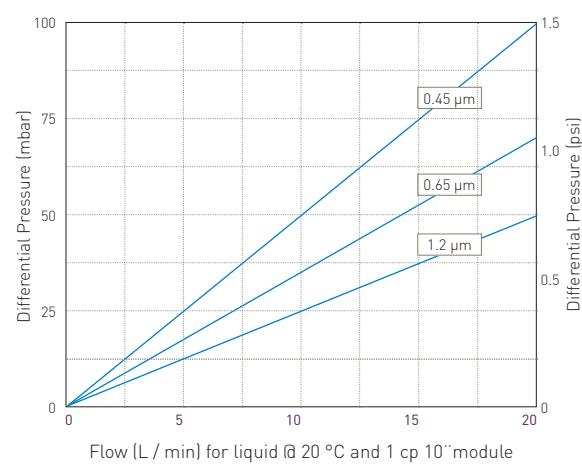

Filtration Stage

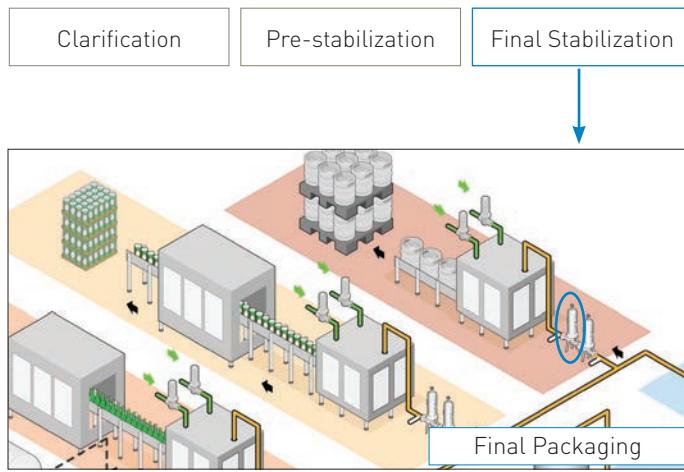



BEVPOR PW Cider


Filter Cartridges



Features

- Validated retention to spoilage organisms
- Inert materials of construction
- Easily integrity tested in-situ
- Integral depth prefiltration layer

Performance Characteristics

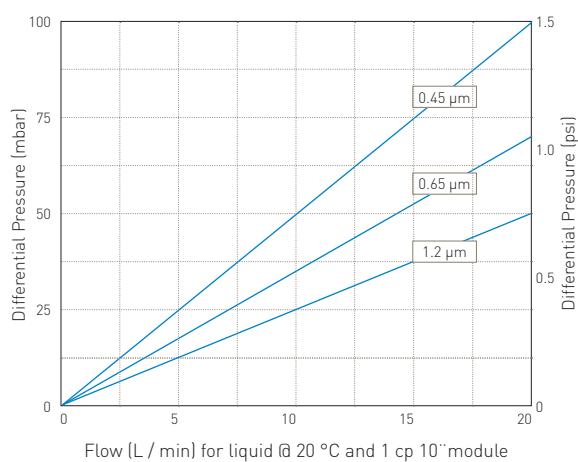

BEVPOR PW cider filters protect the unique characteristics of cider by removing yeast and other spoilage organisms to ensure microbial stability during cold stabilization.

The inert and highly asymmetric PES membrane provides validated microbial retention to typical spoilage organisms, whilst protecting the cider's organoleptic qualities to preserve a fresh taste and a long shelf-life once packaged.


The incorporation of an active prefilter layer allows graded retention throughout the depth of the filter to resist blockage, resulting in an increased capacity and long service lifetimes.

BEVPOR PW filters have been designed to provide a cost-effective solution to cider stabilization by providing increased process control with increased operational efficiency.

Benefits

- Ensures effective microbial stabilization of cider
- Preserves the organoleptic qualities of the cider
- Assured filtration performance
- Increased throughput to blockage

Filtration Stage

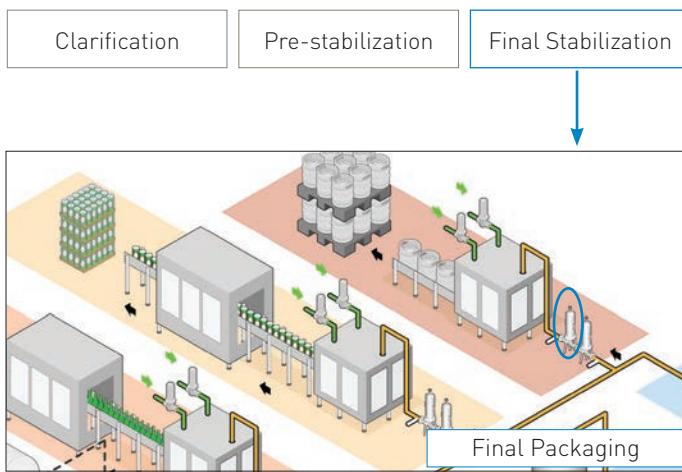



Specifications

Materials of Construction

Filtration Membrane:	Polyethersulphone
Prefilter Layer:	Polyester
Upstream Support:	Polyester
Downstream Support:	Polyester
Inner Support Core:	Polypropylene
Outer Protection Cage:	Polypropylene
End Caps:	Nylon
End Cap Insert:	316L Stainless Steel
O-rings:	Silicone / EPDM

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.



Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperature		Max Forward dP	
°C	°F	[bar]	[psil]
20	68	5.0	72.5
40	104	4.0	58.0
60	140	3.0	43.5
80	176	2.0	29.0
90	194	1.0	14.5
>100 (steam)	>212 (steam)	0.3	4.0

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.6 m² (6.45 ft²)

Cleaning and Sterilization

BEVPOR PW cartridges can be repeatedly steam sterilized in-situ or autoclaved at up to 130 °C (266 °F). They can be sanitized with hot water at up to 90 °C (194 °F) and are compatible with a wide range of chemicals. Please refer to our Clean-in-Place support guide or contact your local Parker representative for more information.

Retention Characteristics

The retention characteristics of BEVPOR PW filters have been validated by challenges performed with the following organisms.

Organism	LRV when challenged with a minimum of 10^7 cfu per cm^2		
	0.45	0.65	1.2
<i>Saccharomyces cerevisiae</i>	FR	FR	FR
<i>Brettanomyces bruxellensis</i>	FR	FR	FR
<i>Lactobacillus brevis</i>	FR	FR	-
<i>Acetobacter oeni</i>	FR	FR	-
<i>Pseudomonas aeruginosa</i>	9.1	8.9	-
<i>Serratia marcescens</i>	FR	FR	-

Integrity Test Data

All filters are flushed with pharmaceutical grade purified water prior to despatch. They are integrity tested to the following limits:

Diffusional Flow Test Parameters	0.45	0.65	1.2
Test Pressure (barg)	1.4	1.0	0.6
Test Pressure (psig)	20.0	15.0	9.0
Max Diffusional Flow per 10 ⁶ [ml/min]	16.0	16.0	16.0

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number. Additionally, each module displays a unique serial number providing full manufacturing traceability.

Ordering information

BPW	-		-		-		-							
Code		Length [Nominal]		Code		Micron		Code		End Cap [10 inch]		Code		0-rings
1		10"	[250 mm]	04		0.45	µm	C		Fin / 226 Bayonet		S		Silicone
2		20"	[500 mm]	06		0.65	µm	D		Fin / 222		E		EPDM
3		30"	[750 mm]	12		1.20	µm	E		Flat Top / 222				
4		40"	[1000 mm]					G		Recess / 222				
								R		BF / 222 Bayonet				

VSH & HSL HOUSING RANGE AVAILABLE



BEVPOR PH Cider

Filter Cartridges

Parker | **domnick**
hunter



BEVPOR PH cider filters protect the unique characteristics of cider by removing yeast and other spoilage organisms to ensure microbial stability during cold stabilization.

The inert and highly asymmetric PES membrane provides validated microbial retention to typical spoilage organisms, whilst protecting the cider's organoleptic qualities to preserve a fresh taste and a long shelf-life once packaged.

The incorporation of an active prefilter layer, combined with an increased filtration area provides high cider flow rates, greater resistance to blockage and maximized service lifetime.

BEVPOR PH filters have been designed to provide the optimum solution to cider stabilization by providing increased process control with maximized operational efficiency.


Features

- Validated retention to spoilage organisms
- Inert materials of construction
- Easily integrity tested in-situ
- Integral depth prefiltration layer
- High filtration area


Benefits

- Ensures effective microbial stabilization of cider
- Preserves the organoleptic qualities of the cider
- Assured filtration performance
- Increased throughput to blockage
- High cider flow and maximized operational efficiency

Performance Characteristics

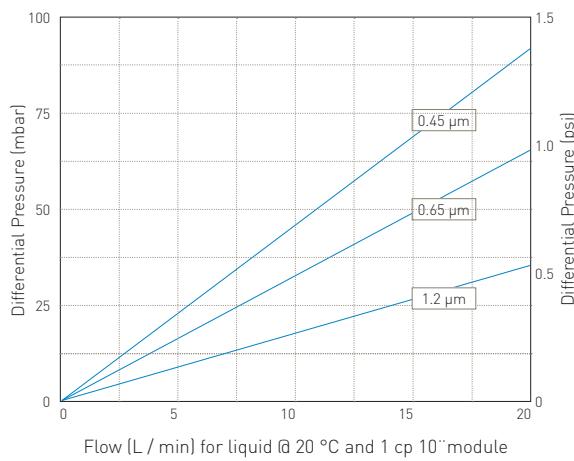

Filtration Stage

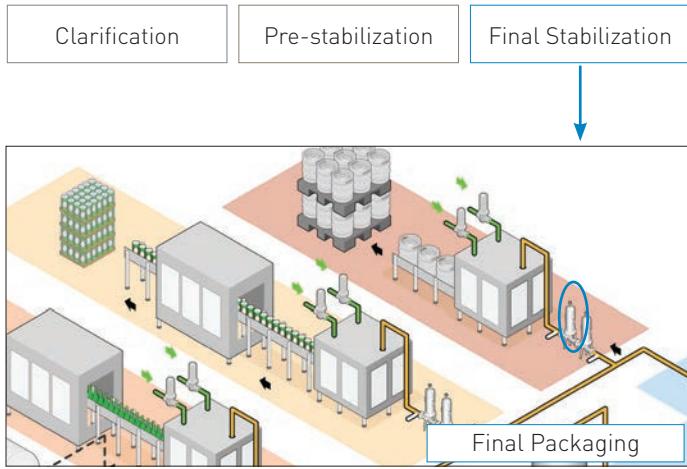



Specifications

Materials of Construction

Filtration Membrane:	Polyethersulphone
Prefilter Layer:	Polyester
Upstream Support:	Polyester
Downstream Support:	Polyester
Inner Support Core:	Polypropylene
Outer Protection Cage:	Polypropylene
End Caps:	Nylon
End Cap Insert:	316L Stainless Steel
O-rings:	Silicone / EPDM

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.



Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperature °C	Max Forward dP °F	(bar)	(psi)
20	68	5.0	72.5
40	104	4.0	58.0
60	140	3.0	43.5
80	176	2.0	29.0
90	194	1.0	14.5
>100 (steam)	>212 (steam)	0.3	4.0

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.8 m² (8.61 ft²)

Cleaning and Sterilization

BEVPOR PH cartridges can be repeatedly steam sterilized in-situ or autoclaved at up to 130 °C (266 °F). They can be sanitized with hot water at up to 90 °C (194 °F) and are compatible with a wide range of chemicals. Please refer to our Clean-in-Place support guide or contact your local Parker representative for more information.

Integrity Test Data

All filters are flushed with pharmaceutical grade purified water prior to despatch. They are integrity tested to the following limits:

Diffusional Flow Test Parameters	0.45	0.65	1.2
Test Pressure (barg)	1.4	1.0	0.6
Test Pressure (psig)	20.0	15.0	9.0
Max Diffusional Flow per 10" [ml/min]	21.0	21.0	16.0

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number. Additionally, each module displays a unique serial number providing full manufacturing traceability.

Retention Characteristics

The retention characteristics of BEVPOR PH filters have been validated by challenges performed with the following organisms.

Organism	LRV when challenged with a minimum of 10 ⁷ cfu per cm ²		
	0.45	0.65	1.2
<i>Saccharomyces cerevisiae</i>	FR	FR	FR
<i>Brettanomyces bruxellensis</i>	FR	FR	FR
<i>Lactobacillus brevis</i>	FR	FR	-
<i>Acetobacter oeni</i>	FR	FR	-
<i>Pseudomonas aeruginosa</i>	9.1	8.9	-
<i>Serratia marcescens</i>	FR	FR	-

*FR - Fully retentive during challenge

When expressed as titre reduction "FR" equates to >10⁷ per 10" module.

Ordering information

BPH	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>
		<input type="text"/>		<input type="text"/>		<input type="text"/>		<input type="text"/>
Code	Length (Nominal)	Code	Micron	Code	End Cap (10 inch)	Code	O-rings	
1	10" (250 mm)	04	0.45 µm	C	Fin / 226 Bayonet	S	Silicone	
2	20" (500 mm)	06	0.65 µm	D	Fin / 222	E	EPDM	
3	30" (750 mm)	12	1.2 µm	E	Flat Top / 222			
4	40" (1000 mm)			R	BF / 222 Bayonet			

VSH & HSL
HOUSING RANGE
AVAILABLE



PREPOR NG

Cider

Filter Cartridges


Parker | domnick
hunter



Features

- Fully validated yeast removal and bacterial reduction
- Truly optimized graded density using unique Optimized Depth Construction Technology
- Mechanically strong and chemically resistant polypropylene construction designed for chemical CIP and backwash

Performance Characteristics

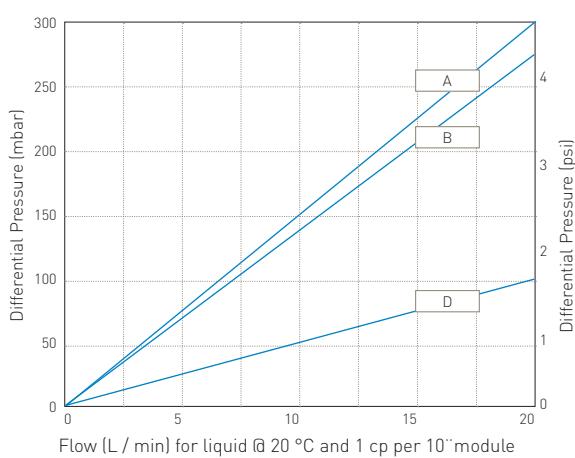

Parker domnick hunter's continued focus on process optimization and control has led to the development of a new range of prefilters for the clarification and pre-stabilization stages of cider production.


The control of particulate and microbial loading is important to provide stability to cider during storage and transport and to ensure that the finished product maintains its desirable characteristics after packaging.

Parker domnick hunter's next generation of PREPOR filters have been developed to remove yeast and reduce bacterial loading to improve short-term stability and to increase the service life of downstream membrane filters. The robust componentry allows for caustic and backwash regeneration, making the filter stage a reliable and cost-effective solution to intermediate stabilization.

Benefits

- Effective control of clarity and microbial stability
- Increased filtration capacity
- Increased service life when combined with regular CIP regeneration

Filtration Stage

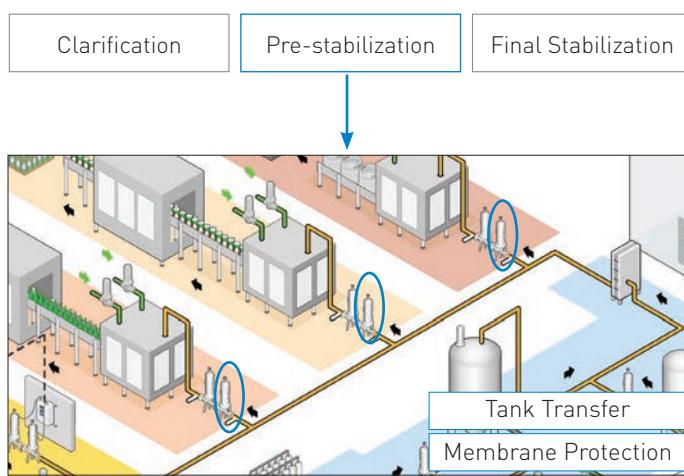



Specifications

Materials of Construction

Filtration Media:	Polypropylene
Upstream Support:	Polypropylene
Downstream Support:	Polypropylene
Inner Support Core:	Polypropylene
Outer Protection Cage:	Polypropylene
End Caps:	Polypropylene
End Cap Insert:	316L Stainless Steel
O-rings:	Silicone / EPDM

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.



Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperature °C	Max Forward dP °F	(bar)	(psi)
20	68	5.0	72.5
40	104	4.0	58.0
60	140	3.0	43.5
80	176	2.0	29.0
90	194	1.0	14.5
>100 (steam)	>212 (steam)	0.3	4.0

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.5 m² (5.38 ft²)

Cleaning and Sterilization

PREPOR NG cartridges can be repeatedly steam sterilized in-situ or autoclaved up to 135 °C (275 °F). They can be sanitized with hot water up to 90 °C (194 °F), are compatible with a wide range of chemicals and can be backwashed. Please refer to our Clean-in-Place Support Guide or contact your local Parker representative for more information.

Manufacturing Traceability


Each filter cartridge displays the product name, product code and lot number.

Additionally, each module displays a unique serial number providing full manufacturing traceability.



Optimized Depth Construction (ODC) provides a unique graded density combining longer service life with absolute filtration efficiency.

Performance Benefits

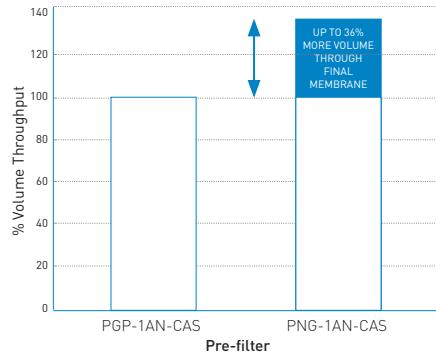

ODC technology combines fine particle retention with increased strength and stability to enhance the performance offered by the PREPOR range.

Ordering information

PNG	-	<input type="text"/>	<input type="text"/>	N	-	<input type="text"/>	A	<input type="text"/>
Code	Length (Nominal)		Code	Micron		Code	End Cap (10 inch)	
1	10"	(250 mm)	A	0.5		C	BF / 226 Bayonet	
2	20"	(500 mm)	B	0.6		D	Fin / 222	
3	30"	(750 mm)	D	1.0		E	Flat Top / 222	
4	40"	(1000 mm)				F	Recess / 222	
						G	BF / 222 Bayonet	
						H		
						I		
						J		
						K		
						L		
						M		
						N		
						O		
						P		
						Q		
						R		
						S		
						T		
						U		
						V		
						W		
						X		
						Y		
						Z		

VSH & HSL
HOUSING RANGE
AVAILABLE





PROTECTING
FOOD
QUALITY

REDUCE
PROCESSING
COSTS

CONSUMER
AND BRAND
PROTECTION

Parker dominick hunter commitments

General & Utilities collection

In addition to market sector specific products, Parker dominick hunter offer a range of filtration products which perform in other process and utility applications to defined specifications.

Controlling the physical, chemical and biological hazards in food production and packaging processes is key to achieving an efficient process and minimising wastage. Parker dominick hunter have a range of specialist filtration products aimed at protecting food processes from a wide range of contaminants in applications such as; clarification, pre-stabilization and final stabilization. These products have been designed against specific performance criteria and return defined performance against hazard elimination.

www.parker.com/dhb beverage



CRYPTOCLEAR PES

Food and Beverage

Filter Cartridges



Features

- Specifically designed and independently tested for the removal of *Cryptosporidium parvum oocysts*
- Easily integrity tested in-situ
- Strong, robust construction for repeated cleaning and sanitization in-situ

CRYPTOCLEAR PES utilizes the unique properties of a microbially retentive polyethersulphone membrane that provides absolute retention of *Cryptosporidium parvum oocysts* to meet the specific needs of the food, beverage and potable water industries.


CRYPTOCLEAR PES membrane has an asymmetrical pore structure with a high voids volume which offers unrivalled retention capacity resulting in higher throughputs and higher flow rates than symmetrical membranes.

The microporous membrane is inherently hydrophilic and can be integrity tested repeatedly, providing a valuable quality assurance tool that fits well into a HACCP framework.


Benefits

- Eliminates the threat of *Cryptosporidium* infection from the water supply
- Assured filtration performance
- Extended service life from the membrane filter reduces the cost of filtration

Performance Characteristics

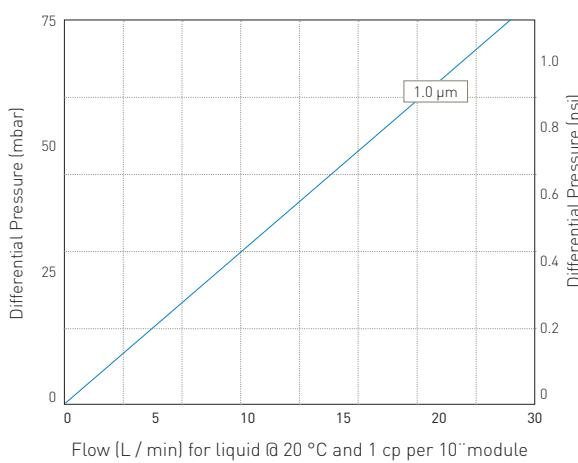

Filtration Stage

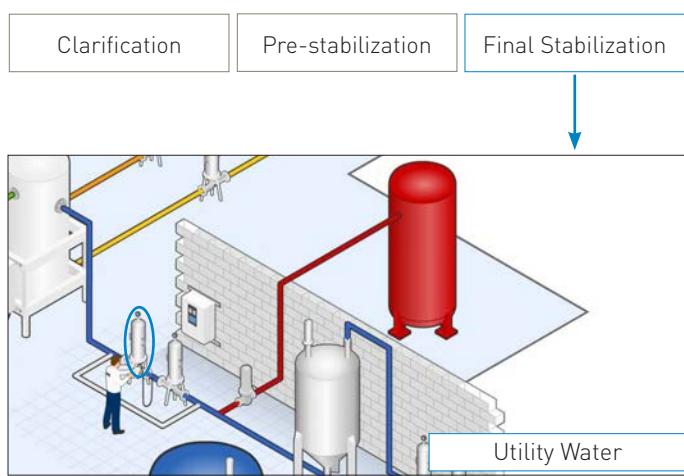



Specifications

Materials of Construction

Filtration Media:	Polyethersulphone
Prefilter Layer:	Polyester
Upstream Support:	Polyester
Downstream Support:	Polyester
Inner Support Core:	Polypropylene
Outer Protection Cage:	Polypropylene
End Caps:	Nylon
End Cap Insert:	316L Stainless Steel
Standard o-rings:	Silicone

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21CFR Part



177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C. CRYPTOCLEAR PES is listed as a WRAS Approved Product.

WRAS - Water Regulations Advisory Scheme BS6920 Test of Effect on Water Quality.

Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperature °C	Temperature °F	Max Forward dP (bar)	Max Forward dP (psi)
20	68	5.0	72.5
40	104	4.0	58.0
60	140	3.0	43.5
80	176	2.0	29.0
90	194	1.0	14.5
>100 (steam)	>212 (steam)	0.3	4.0

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.8 m² (8.61 ft²)

Cleaning and Sterilization

CRYPTOCLEAR PES cartridges can be repeatedly steam sterilized in-situ or autoclaved at up to 142 °C (287.6 °F). They can be sanitized with hot water at up to 90 °C (194 °F) and are compatible with a wide range of chemicals. Please refer to our Clean-in-Place support guide or contact your local Parker representative for more information.

Retention Characteristics

The removal efficiencies of CRYPTOCLEAR PES cartridges have been determined from tests conducted by Thames Water Utilities Limited on live *Cryptosporidium oocysts*.

Product	Micron	Retention
CRYPTOCLEAR PES	1.0	100%

Integrity Test Data

All filters are flushed with purified water prior to despatch. They are integrity testable to the following limits:

Micron Rating	1.0
Diffusional Flow	(barg)
Test Pressure	(psig)
Max. Diffusional Flow (10")	21.0 (ml / min)

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number. Additionally, each module displays a unique serial number providing full manufacturing traceability.


Ordering information

ZCCS



-

Code	Length (Nominal)
K	5" (125 mm)
1	10" (250 mm)
2	20" (500 mm)
3	30" (750 mm)
4	40" (1000 mm)



Code	Micron
100	1.00 µm



Code	End Cap (10" inch)
C	BF / 226 Bayonet
D	Fin / 222
E	Flat Top / 222
G	Recess / 222
R	BF / 222 Bayonet

VSH & HSL
HOUSING RANGE
AVAILABLE



CRYPTOCLEAR PLUS

Food and Beverage


Filter Cartridges



Features

- Specifically designed for the reduction of *Cryptosporidium parvum* oocysts
- Graded density polypropylene pleated media, optimized for dirt holding capacity and oocyst retention
- 0.6 and 1.0 micron retention ratings

Performance Characteristics

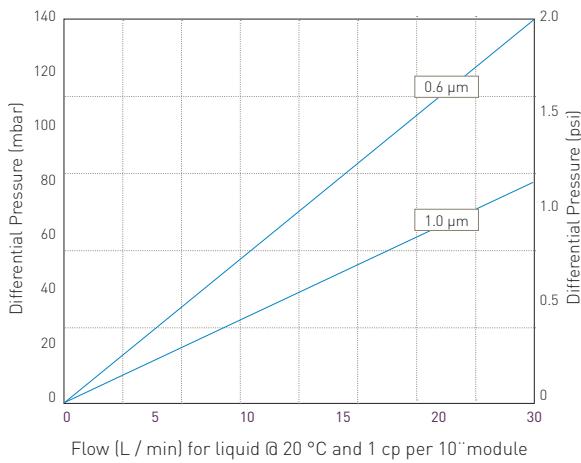

CRYPTOCLEAR PLUS pleated filter cartridges have been designed specifically for the removal of *Cryptosporidium parvum* and *Giardia intestinalis* from water in the food, beverage and healthcare industries.


Extensive research, including live oocyst challenge has resulted in a graded density filtration medium that maximizes loading capacity of the filters whilst accurately defining particle and oocyst retention under a variety of operating conditions.

CRYPTOCLEAR PLUS cartridges can be repeatedly sanitized using hot water, steam and a wide range of chemicals.

Benefits

- Assured performance to reduce the threat of *Cryptosporidium* infection
- Extended lifetime to blockage under high particle loading conditions
- Flexibility to optimize the filtration in-line with the facility requirements for *Cryptosporidium* control

Filtration Stage

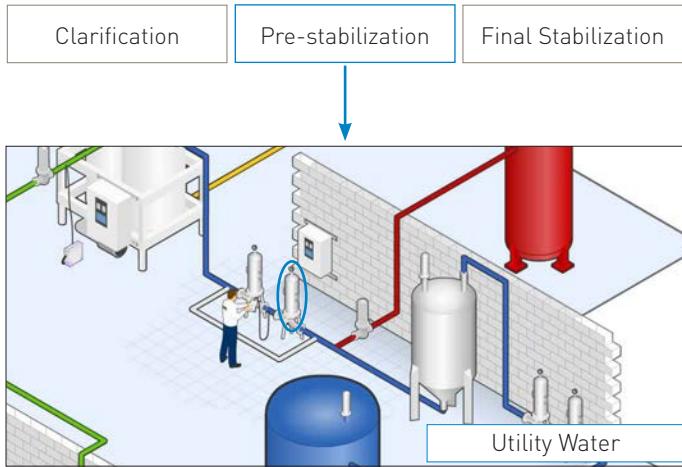



Specifications

Materials of Construction

Filtration Media:	Polypropylene
Upstream Support:	Polypropylene
Downstream Support:	Polypropylene
Inner Support Core:	Polypropylene
Outer Protection Cage:	Polypropylene
End Caps:	Polypropylene
End Cap Insert:	316L Stainless Steel
Standard o-rings:	Silicone

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C. CRYPTOCLEAR PLUS is listed as a WRAS Approved Product. WRAS - Water Regulations Advisory Scheme BS6920 Test of Effect on Water Quality.



Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperature °C	Temperature °F	Max Forward dP (bar)	Max Forward dP (psi)
20	68	5.0	72.5
40	104	4.0	58.0
60	140	3.0	43.5
80	176	2.0	29.0
90	194	1.0	14.5
>100 (steam)	>212 (steam)	0.3	4.0

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.57 m² (6.13 ft²)

Cleaning and Sterilization

CRYPTOCLEAR PLUS cartridges can be repeatedly steam sterilized in-situ or autoclaved at up to 142 °C (287.6 °F). They can be sanitized with hot water at up to 90 °C (194 °F) and are compatible with a wide range of chemicals.

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number. Additionally, each module displays a unique serial number providing full manufacturing traceability.

Retention Characteristics

The removal efficiencies of CRYPTOCLEAR PLUS cartridges have been determined from tests conducted by Thames Water Utilities Limited on live *Cryptosporidium oocysts*.

Product	Micron	Retention
CRYPTOCLEAR PLUS	0.6	>99.997%
CRYPTOCLEAR PLUS	1.0	>99.3%

Ordering information

ZCCP



-



Code	Length (Nominal)
1	10" (250 mm)
2	20" (500 mm)
3	30" (750 mm)
4	40" (1000 mm)



Code	Micron	End Cap (10" inch)
.60	0.6 µm	C BF / 226 Bayonet
1.0	1.00 µm	D Fin / 222
		E Flat Top / 222
		G Recess / 222
		R BF / 222 Bayonet

VSH & HSL
HOUSING RANGE
AVAILABLE



PREPOR PP Food and Beverage

Filter Cartridges



Features

- Validated retention to yeast and spoilage bacteria
- High filtration area pleated media
- Thermally bonded, all polypropylene construction

PREPOR PP filter cartridges will significantly reduce the number of yeast and spoilage organisms from beverage products, providing extremely cost-effective pre-stabilization of process liquids.


PREPOR PP filters will also "condition" liquids and can be used to improve the visual clarity and filterability of products, to benefit the performance and efficiency of terminal stabilization operations such as final membrane stabilization and pasteurization.

The filters have been designed to withstand harsh operating conditions. Their mechanical strength and wide chemical resistance make them suitable for aggressive clean-in-place operations using chemicals and steam.


Benefits

- Short-term microbial stability of process liquids
- High flow and service life to blockage
- Compatible with aggressive process conditions including chemical cleaning and steam sterilization

Performance Characteristics

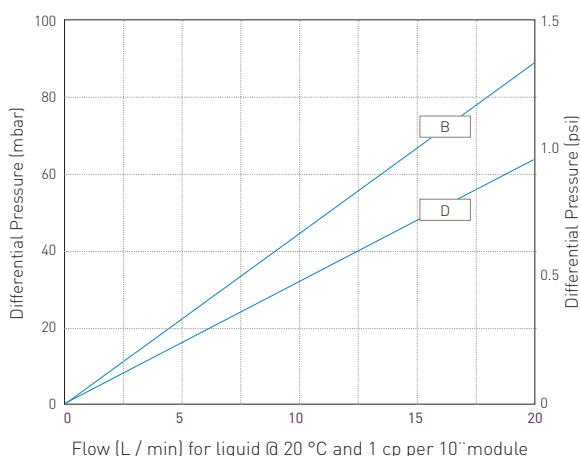

Filtration Stage

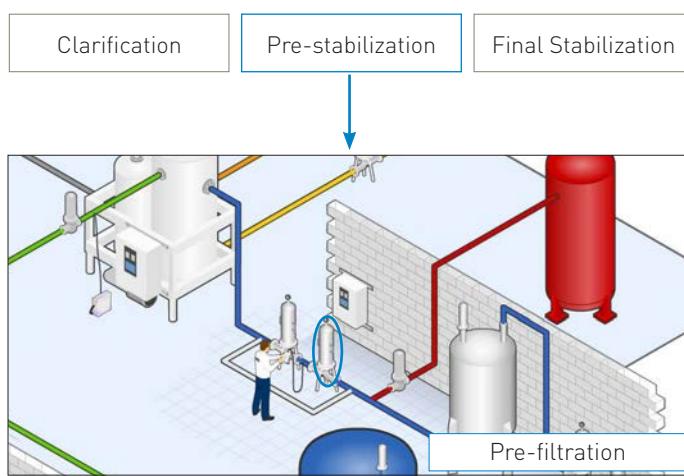



Specifications

Materials of Construction

■ Filtration Media:	Polypropylene
■ Upstream Support:	Polypropylene
■ Downstream Support:	Polypropylene
■ Inner Support Core:	Polypropylene
■ Outer Protection Cage:	Polypropylene
■ End Caps:	Polypropylene
■ End Cap Insert:	316L Stainless Steel
■ O-rings/gaskets:	Silicone / EPDM

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.



Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperature °C	Temperature °F	Max Forward dP (bar)	Max Forward dP (psi)
20	68	5.0	72.5
40	104	4.0	58.0
60	140	3.0	43.5
80	176	2.0	29.0
90	194	1.0	14.5
>100 (steam)	>212 (steam)	0.3	4.0

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.5 m² (5.38 ft²)

Cleaning and Sterilization

PREPOR PP cartridges can be repeatedly steam sterilized in-situ or autoclaved at up to 135 °C (275 °F). They can be sanitized with hot water at up to 90 °C (194 °F) and are compatible with a wide range of chemicals.

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number.

Additionally, each module displays a unique serial number providing full manufacturing traceability.

Retention Characteristics

The retention characteristics of PREPOR PP filters have been determined by a combination of controlled laboratory tests and in-use monitoring for a number of organisms.

Organism	LRV when challenged with a minimum of 10 ⁷ cfu per cm ²	
	B	D
<i>Saccharomyces cerevisiae</i>	4	2
<i>Escherichia coli</i>	2	-
<i>Oenococcus oenos</i>	2	-
<i>Serratia marcescens</i>	2	-

Ordering information

PPP	-	□
Code Length (Nominal)		
1	10"	(250 mm)
2	20"	(500 mm)
3	30"	(750 mm)
4	40"	(1000 mm)

□	-	N
Code Micron		
B	0.6 µm	
D	1.0 µm	

□	-	A
Code End Cap (10 inch)		
C	BF / 226 Bayonet	
D	Fin / 222	
E	Fiat Top / 222	
G	Recess / 222	
H	UF Retrofit	
R	BF / 222 Bayonet	

□	-	
Code O-rings		
S	Silicone	
E	EPDM	

**VSH & HSL
HOUSING RANGE
AVAILABLE**



PEPLYN PLUS

Food and Beverage

Filter Cartridges


Parker | domnick
hunter



Features

- | Absolute retention ratings from 0.6µm to 100µm
- | Pleated media with graded density
- | All polypropylene, thermally bonded cartridge construction

Performance Characteristics

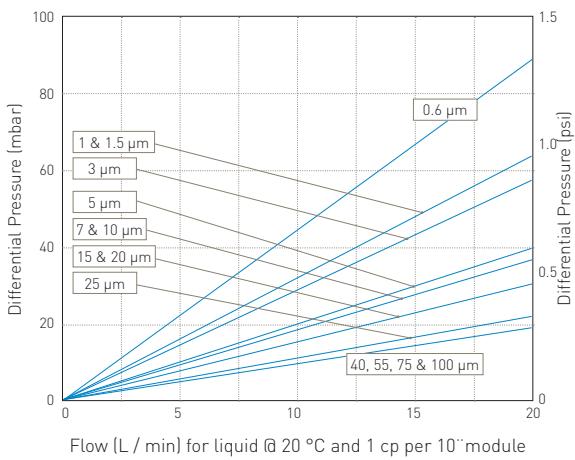

PEPLYN PLUS filter cartridges are utilized for the clarification and pre-stabilization of process liquids and supporting utility solutions for the beverage industries.


Available in a range of absolute retention ratings, PEPLYN PLUS cartridges represent a cost-effective solution to condition a range of beverage products prior to intermediate storage or final stabilization.

Extensive research has resulted in filter media with continuously graded fibre density giving progressively finer particulate retention through the depth of the media. This, combined with optimized media pleating density gives PEPLYN PLUS cartridges exceptional lifetime and retention performance characteristics.

Benefits

- Reliable, fine particle retention
- High flow and increased service life to blockage
- Compatible with aggressive process conditions including chemical cleaning and steam sanitization

Filtration Stage

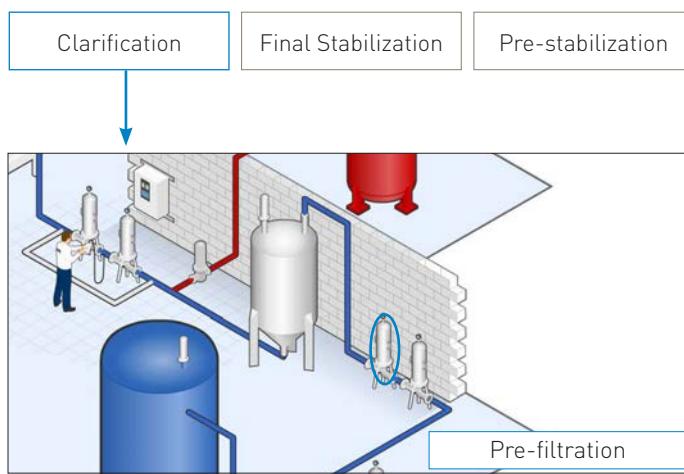



Specifications

Materials of Construction

Filtration Media:	Polypropylene
Upstream Support:	Polypropylene
Downstream Support:	Polypropylene
Inner Support Core:	Polypropylene
Outer Protection Cage:	Polypropylene
End Caps:	Polypropylene
End Cap Insert (if applicable):	316L Stainless Steel*
* Not available in B End Cap variants	
Standard o-rings:	Silicone

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.



Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperature °C	Max Forward dP °F	Max Forward dP (bar)	Max Forward dP (psi)
20	68	5.0	72.5
40	104	4.0	58.0
60	140	3.0	43.5
80	176	2.0	29.0
90	194	1.0	14.5
>100 (steam)	>212 (steam)	0.3	4.0

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.6 m² (6.5 ft²)

Cleaning and Sterilization

PEPPLYN PLUS cartridges can be repeatedly steam sterilized in-situ or autoclaved at up to 135 °C (275 °F). They can be sanitized with hot water at up to 90 °C (194 °F) and are compatible with a wide range of chemicals.

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number.

Additionally, each module displays a unique serial number providing full manufacturing traceability.

Retention Characteristics

The retention characteristics of PEPPLYN PLUS filter cartridges have been determined by a single-pass technique using suspensions of ISO 12103 Pt. 1 A2 Fine and A4 Course test dust in water.

Media	Micron rating at various efficiencies				
	>99.99%	99.98%	99.90%	99%	90%
Code	10000	5000	1000	100	10
0.6	0.60	0.57	0.54	0.32	0.20
1.0	1.00	0.95	0.90	0.70	0.50
1.5	1.50	1.40	1.10	0.80	0.60
003	3.00	2.80	1.80	1.00	0.70
005	5.00	4.70	4.50	3.50	1.00
007	7.00	6.70	6.30	4.50	2.50
010	10.00	8.00	7.00	4.80	2.80
015	15.00	12.00	10.00	7.20	4.50
020	20.00	16.00	14.00	10.00	6.00
025	25.00	20.00	17.00	12.00	7.00

* Higher microns available upon request

Ordering information

ZCPP



-

Code	Length (Nominal)
1	10" (250 mm)
2	20" (500 mm)
3	30" (750 mm)
4	40" (1000 mm)




Code	Micron
.60	0.6
1.0	1.0
1.5	1.5
003	3.0
005	5.0
007	7.0
010	10.0



Code	Micron
015	15.0
020	20.0
025	25.0
040	40.0
055	55.0
075	75.0
100	100.0




Code	End Cap (10 inch)
B*	dh DOE
C	BF / 226 Bayonet
D	Fin / 222
E	Flat Top / 222
G	Recess / 222
H	UF Retrofit
R	BF / 222 Bayonet



Code	Variant
S*	Steam Sterilizable

*Not available in B End Cap variant



Code	O-rings
S*	Silicone
E	EPDM

*Silicone O-rings supplied as standard

*EPDM gaskets supplied as standard

VSH & HSL
HOUSING RANGE
AVAILABLE



PEPLYN HD

Food and Beverage

Filter Cartridges



Features

- High depth, graded density filtration media
- Available in a range of absolute micron retention ratings
- All polypropylene, thermally bonded construction

PEPLYN HD filter cartridges have been developed to excel in liquid clarification applications where a consistent quality of filtrate is required from variable particle loadings of the process solution.


The PEPLYN HD filter media has outstanding particle holding capacity through its multi-layer high depth construction, providing extended service lifetimes and consistent quality filtrate under demanding conditions.

Capture of particles is throughout the depth of the media with larger particles being retained in the outer prefiltration layers, while the inner graded density media provides accurately defined retention to finer particulate. Both these mechanisms combine to provide a cartridge filter which returns extended service lifetimes.


Benefits

- Increased dirt holding capacity and resistance to blockage under high loading conditions
- Ability to provide consistent quality of filtrate in a wide range of clarification applications
- Compatible with aggressive process conditions including chemical cleaning and steam sanitization

Performance Characteristics

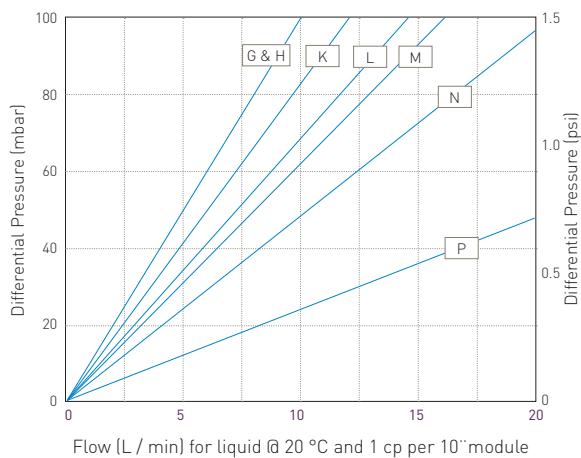

Filtration Stage

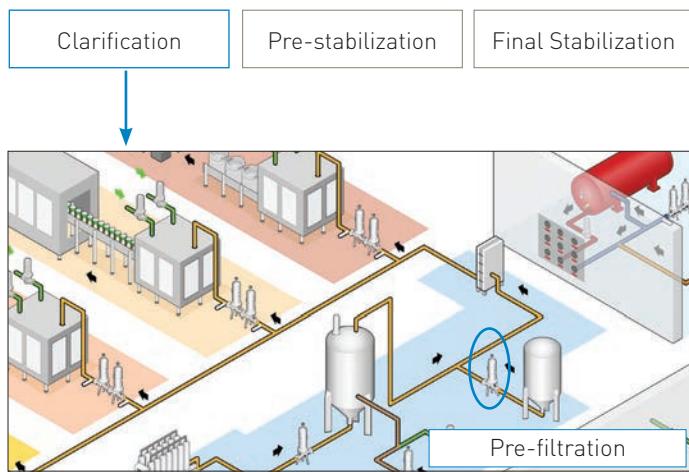



Specifications

Materials of Construction

■ Filtration Media:	Polypropylene
■ Prefilter Layer:	Polypropylene
■ Upstream Support:	Polypropylene
■ Downstream Support:	Polypropylene
■ Inner Support Core:	Polypropylene
■ Outer Protection Cage:	Polypropylene
■ End Caps:	Polypropylene
■ End Cap Insert:	316L Stainless Steel
■ O-rings:	Silicone / EPDM

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.



Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperature °C	Max Forward dP °F	Max Forward dP (bar)	Max Forward dP [psi]
20	68	5.0	72.5
40	104	4.0	58.0
60	140	3.0	43.5
80	176	2.0	29.0
90	194	1.0	14.5
>100 (steam)	>212 (steam)	0.3	4.0

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.3 m² (3.22 ft²)

Cleaning and Sterilization

PEPPLYN HD cartridges can be repeatedly steam sterilized in-situ or autoclaved at up to 135 °C (275 °F). They can be sanitized with hot water at up to 90 °C (194 °F) and are compatible with a wide range of chemicals.

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number.

Additionally, each module displays a unique serial number providing full manufacturing traceability.

Retention Characteristics

The retention characteristics of PEPPLYN HD filter cartridges have been determined by a single-pass technique using suspensions of ISO 12103 Pt. 1 A2 Fine and A4 Course test dust in water.

Media	Micron rating at various efficiencies					
	>99.99%	99.98%	99.90%	99%	95%	90%
Code	10000	5000	1000	100	20	10
G	3.00	2.80	1.80	1.00	0.85	0.70
H	4.80	4.70	3.20	2.60	1.90	1.60
K	9.00	8.20	6.90	5.00	3.70	3.40
L	12.00	10.00	7.80	5.90	4.60	4.00
M	14.00	10.00	9.20	6.90	6.10	5.00
N	17.00	14.00	12.00	9.00	7.00	6.00
P	22.00	18.00	15.00	12.00	9.40	6.80

Ordering information

PHD -

Code | Length (Nominal)

1	10"	(250 mm)
2	20"	(500 mm)
3	30"	(750 mm)
4	40"	(1000 mm)

- N - A

Code | Micron

G	3.0 μ m
H	4.8 μ m
K	9.0 μ m
L	12.0 μ m
M	14.0 μ m
N	17.0 μ m
P	22.0 μ m

- A

Code | End Cap (10 inch)

C	BF / 226 Bayonet
D	Fin / 222
E	Flat Top / 222
H	UF Retrofit
R	BF / 222 Bayonet

Code | O-rings

S	Silicone
E	EPDM

**VSH & HSL
HOUSING RANGE
AVAILABLE**



PEPLYN HA

Food and Beverage

Filter Cartridges



Features

- Specially designed media for backwash regeneration against insoluble particulate
- High surface area
- Available in a range of absolute micron retention ratings

PEPLYN HA filters have been specifically developed to provide the optimum solution for particulate removal in liquid clarification applications.


The filtration media balances a high surface area and closely controlled porosity, in a configuration that maximizes the cleaning efficiency of the cartridge through backwash procedures.

Capture of larger insoluble particulate is predominantly on the surface of the media, where the rigid, open pleat structure ensures that backwash cleaning provides effective removal. Smaller colloids are retained throughout the depth of the graded density PEPLYN media, providing accurately defined retention under the variable particle loading conditions typical in clarification applications.


Benefits

- Increased service life when combined with frequent backwash cleans
- High flow and increased resistance to blockage under high particle loading conditions
- A consistent and reliable quality filtrate delivered to intermediate storage in the bottling facility

Performance Characteristics

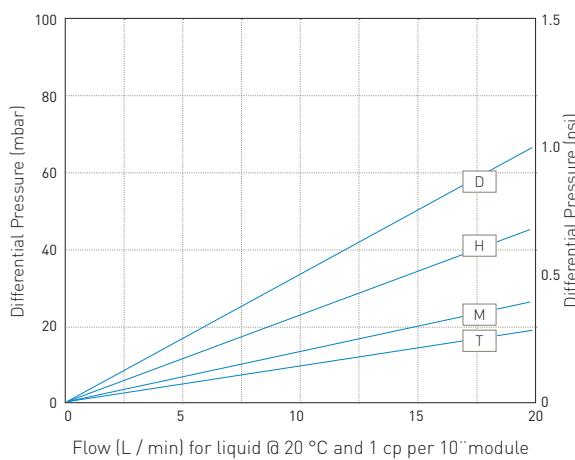

Filtration Stage

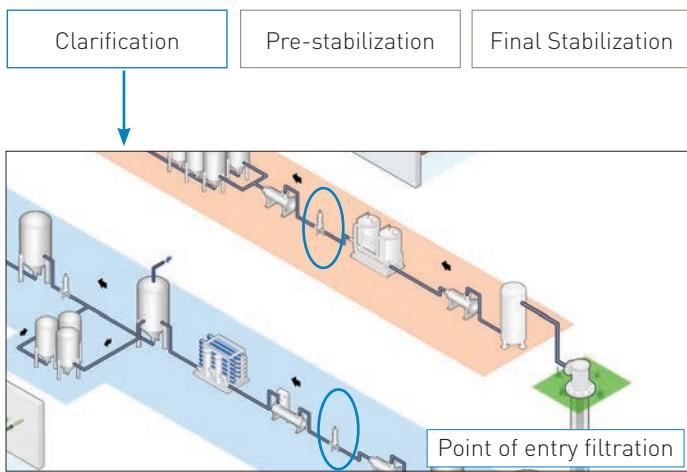



Specifications

Materials of Construction

■ Filtration Media:	Polypropylene
■ Upstream Support:	Polypropylene
■ Downstream Support:	Polypropylene
■ Inner Support Core:	Polypropylene
■ Outer Protection Cage:	Polypropylene
■ End Caps:	Polypropylene
■ End Cap Insert:	316L Stainless Steel
■ O-rings:	Silicone / EPDM

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.



Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperature °C	Max Forward dP (bar)	Max Forward dP (psi)
20	68	5.0
40	104	4.0
60	140	3.0
80	176	2.0
90	194	1.0
>100 (steam)	>212 (steam)	0.3

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.7 m² (7.53 ft²)

Cleaning and Sterilization

PEPLYN HA cartridges can be repeatedly steam sterilized in-situ or autoclaved at up to 135 °C (275 °F). They can be sanitized with hot water at up to 90 °C (194 °F) and are compatible with a wide range of chemicals.

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number.

Additionally, each module displays a unique serial number providing full manufacturing traceability.

Retention Characteristics

The retention characteristics of PEPLYN HA filter cartridges have been determined by a single-pass technique using suspensions of ISO 12103 Pt. 1 A2 Fine and A4 Course test dust in water.

Media	Micron rating at various efficiencies					
	>99.99%	99.98%	99.90%	99%	95%	90%
Code	10000	5000	1000	100	20	10
D	1.00	0.95	0.90	0.70	0.60	0.50
E	1.50	1.40	1.10	0.80	0.70	0.60
G	3.00	2.80	1.80	1.00	0.90	0.70
H	5.00	4.70	4.50	3.50	2.30	1.00
K	10.00	8.00	7.00	4.80	3.80	2.80
L	15.00	12.00	10.00	7.20	6.00	4.50
M	20.00	16.00	14.00	10.00	8.00	6.00
N	25.00	20.00	17.00	12.00	9.00	7.00
P	32.00	27.00	24.00	18.00	13.00	10.00
T	50.00	40.00	34.00	28.00	20.00	17.00
U	70.00	55.00	50.00	40.00	30.00	25.00
W	125.00	100.00	80.00	70.00	50.00	40.00

Ordering information

PHA -

Code	Length (Nominal)
1	10" (250 mm)
2	20" (500 mm)
3	30" (750 mm)
4	40" (1000 mm)

N -

Code	Micron
D	1.00 µm
E	1.50 µm
G	3.00 µm
H	5.00 µm
K	10.00 µm
L	15.00 µm
M	20.00 µm
N	25.00 µm
P	32.00 µm
T	50.00 µm
U	70.00 µm
W	125.00 µm

A

Code	End Cap (10 inch)
C	BF / 226 Bayonet
D	Fin / 222
E	Flat Top / 222
G	Recess / 222
H	UF Retrofit
R	BF / 222 Bayonet

O-rings

S	Silicone
E	EPDM

**VSH & HSL
HOUSING RANGE
AVAILABLE**



PROPLEAT PP Food and Beverage

Filter Cartridges


Parker | domnick
hunter



Features

- | A wide range of retention ratings
- | Continuous length thermally bonded polypropylene sleeve and core
- | Elevated temperature option available for hot water sanitization and steam sterilization

Performance Characteristics

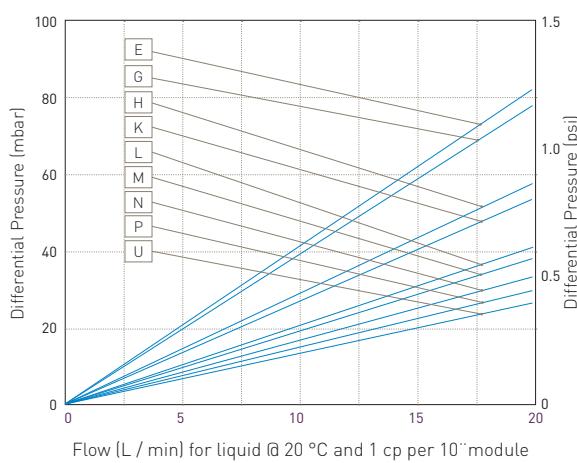

PROPLEAT PP filters have been developed to bridge the gap between meltblown depth filters and absolute rated pleated media filters for liquid clarification.


Their continuous length and all polypropylene construction results in a robust yet economical design that maximizes the effective filtration area and provides wide chemical compatibility, coupled with low extractable levels.

All PROPLEAT PP cartridges exhibit 99% efficiency at their given retention rating, providing consistent and economical clarification in a diverse range of applications.

Benefits

- Flexibility to excel in a wide range of clarification applications
- Strong, robust construction to provide stable retention in diverse process conditions
- Ability to be cleaned and sterilized in-situ

Filtration Stage

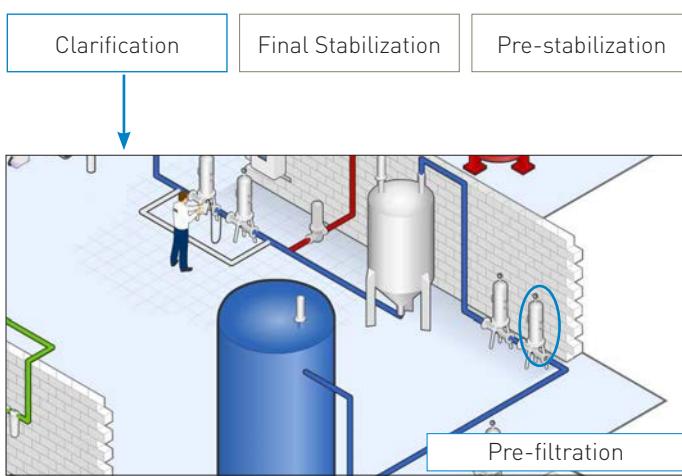



Specifications

Materials of Construction

Filtration Media:	Polypropylene
Upstream Support:	Polypropylene
Downstream Support:	Polypropylene
Inner Support Core:	Polypropylene
Outer Protection Cage:	Polypropylene
End Caps:	Polypropylene
End Cap Insert (if applicable):	316L Stainless Steel*

* Not available in B and L End Cap variants

Standard o-rings / Gaskets: Silicone / EPDM

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.



Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperature °C	Max Forward dP °F	Max Forward dP (bar)	Max Forward dP (psi)
20	68	5.0	72.5
40	104	4.0	58.0
60	140	3.0	43.5
80	176	2.0	29.0
90	194	1.0	14.5
>100 (steam)	>212 (steam)	0.3	4.0

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.6 m² (6.5 ft²)

Cleaning and Sterilization

PROPLEAT PP cartridges can be repeatedly steam sterilized in-situ or autoclaved at up to 121 °C (250 °F). They can be sanitized with hot water at up to 90 °C (194 °F) and are compatible with a wide range of chemicals.

Retention Characteristics

The retention characteristics of PROPLEAT PP filter cartridges have been determined by a single-pass technique using suspensions of ISO 12103 Pt. 1 A2 Fine and A4 Course test dust in water.

Media	99% approximate ratings at lower efficiencies		
	99%	95%	90%
Code β Ratio	100	25	10
E	0.8	0.7	0.6
G	1.0	0.9	0.7
H	3.5	2.3	1.0
K	4.8	3.8	2.8
L	7.2	6.0	4.5
M	10.0	8.0	6.0
N	12.0	9.0	7.0
P	18.0	13.0	10.0
U	40.0	30.0	25.0

Recommended Rinse Volume

Prior to use - 10 litres per 10" (250 mm) cartridge.

Minimum Box Quantities

All cartridges supplied in boxes of 6.

Dimensions

Nominal outside diameter:	2.8" (70 mm) C,D,E,R Style
	2.5" (64 mm) B,L Style
Nominal inside diameter:	1.1" (28 mm)

Standard Lengths (DOE seal to seal)

Length	B Style	L Style
1	9 7/8" (250 mm)	9 7/8" (250 mm)
2	19 1/2" (498 mm)	20" (508 mm)
3	29 3/8" (746 mm)	30 1/8" (766 mm)
4	39 1/8" (994 mm)	40" (1014 mm)

Ordering information

PRPP		-	N		-	Code End Cap (10 inch)	Code O-rings	Code Option
Code Length (Nominal)			Retention Rating			Code End Cap (10 inch)	Code O-rings	Code Option
1 10" (250 mm)			E			B dh DOE	S Silicone	S* Hot water / steam option
2 20" (500 mm)			G			C BF / 226 Bayonet	EPDM	
3 30" (750 mm)			H			D Fin / 222		
4 40" (1000 mm)			K			E Flat Top / 222		
			L			F Extended DOE		
			M			G BF / 222 Bayonet		
			N					
			P					
			U					

**VSH & HSL
HOUSING RANGE
AVAILABLE**



PARMAX

Food and Beverage

Filter Cartridges



Features

- Large diameter for high flow rates and ease of change-out
- Absolute retention ratings from 1 micron to 90 micron
- Inside - out flow pattern ensures positive capture of contaminants

The best of pleated and large diameter technologies are combined in Parker domnick hunter's PARMAX high flow filter cartridges.


The unique layered construction provides excellent retention across a wide range of flux rates. One 6" diameter cartridge can handle up to 80 m³ / hr flow (60" length). The inside to outside flow allows for a high contaminant holding capacity and a long filter life which makes the PARMAX an ideal choice for a wide variety of critical process applications.

PARMAX cartridges are available in polypropylene in absolute (99.98%) micro ratings from 1 to 90 microns.


Benefits

- Small filter system size and reduced running cost to represent an economical solution to a wide range of clarification duties
- Consistent quality filtrate is delivered in a wide range of clarification applications
- Increased protection to downstream systems and elimination of start-up cleans following change-out

Performance Characteristics

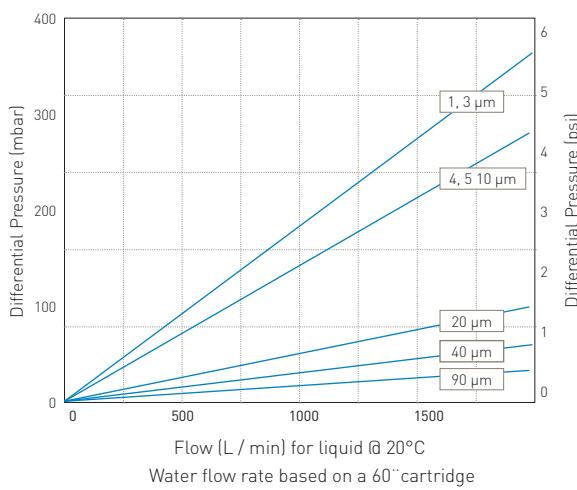

Filtration Stage

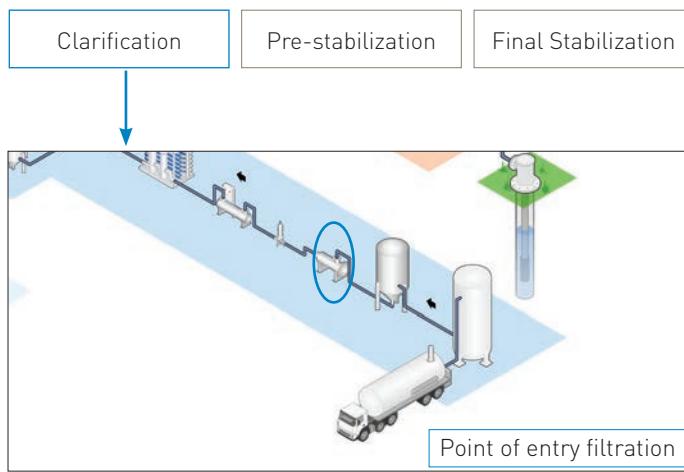



Specifications

Materials of Construction

Filtration Media:	Polypropylene
Support / Drainage:	Polypropylene
Hardware:	Polypropylene
Standard O-rings (SOE):	EPDM Silicone

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177 and current EC1935 / 2004.



Maximum Operating Temperature

80 °C (176 °F) @ 2.1 bar (30 psi)

Recommended Flow Rate Conditions

20"	: Up to 40 m ³ / hr
40"	: Up to 80 m ³ / hr
60"	: Up to 80 m ³ / hr

Recommended Change Out Pressure

2.41 bar (32 psi)


Retention Ratings (99.98%)

1, 3, 4.5, 10, 20, 40 and 90** µm

Maximum Differential Pressure

4.8 bar (70 psi) @ 25 °C (77 °F)
2.1 bar (30 psi) @ 80 °C (176 °F)

Dimensions (Nominal)

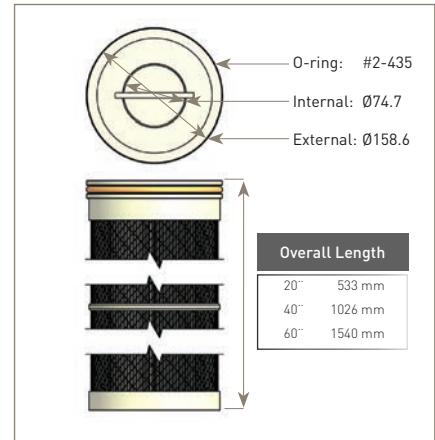

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number. Additionally, each module displays a unique serial number providing full manufacturing traceability.

Ordering information

Code	Material
RCP	Polypropylene

Code	Micron
010	1.0µm
030	3.0µm
045	4.5µm
100	10.0µm
200	20.0µm
400	40.0µm
900	90.0µm

Code	Length (Nominal)
20	20" (508 mm)
40	40" (1016 mm)
60	60" (1524 mm)

Code	Seal Material
E	EPDM
S	Silicone

Code	End Cap Configuration
PP	435 o-ring / closed

**HSP
HOUSING RANGE
AVAILABLE**



MAXGUARD

Food and Beverage

Filter Cartridges


Parker | domnick hunter



Features

- Large diameter for high flow rates and ease of change-out
- Absolute rated, high depth, polypropylene media
- Positive 226 o-ring seal for assured filtration integrity

Performance Characteristics

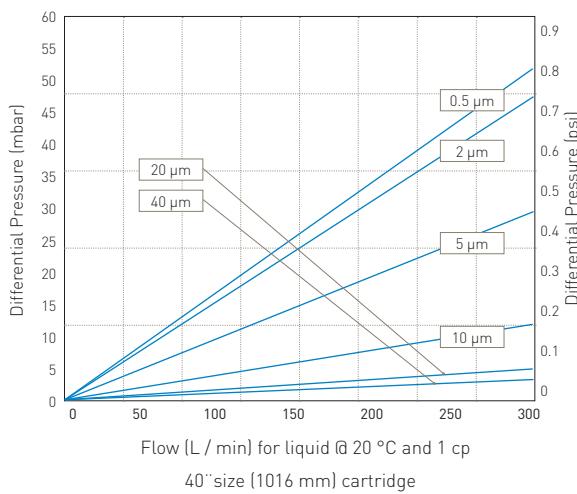


Parker's MAXGUARD high capacity cartridge product line provides a cost-effective alternative to bag media or standard 2-1/2 inch cartridges for high flow applications. Each MAXGUARD cartridge has a 6" (152 mm) nominal outside diameter and can handle flows up to 20m³/hr, significantly reducing the number of cartridges required for large flow applications.

MAXGUARD cartridges are available in polypropylene media. All cartridges feature an industry standard 226 positive o-ring seal and easy-to-grasp integrated handle. All cartridges have absolute retention ratings (beta = 5000) ideal for critical applications.

Benefits

- Small filter system size and reduced running cost to represent economical solution to a wide range of clarification duties
- Consistent quality filtrate is delivered and increased resistance to blockage in a wide range of clarification applications
- Assurance of filtration efficiency for more critical applications

Filtration Stage

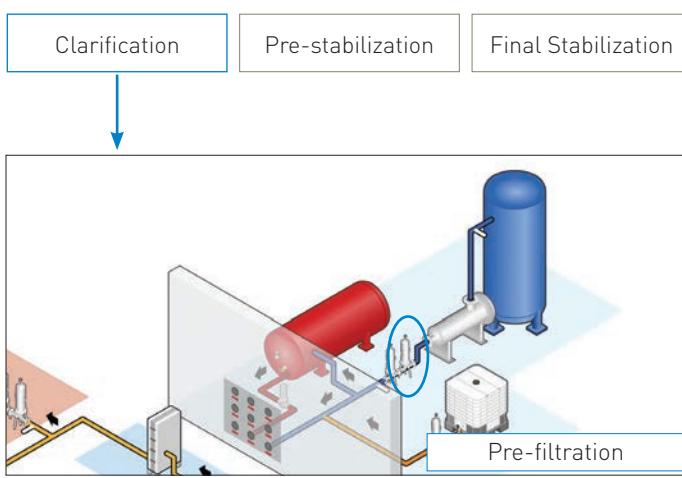



Specifications

Materials of Construction

■ Filtration Media:	Polypropylene
■ Support Layers:	Polypropylene
■ Support Core:	Polypropylene
■ O-Rings:	Silicone

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.



Maximum Operating Temperature

Max Temperature: 80°C at 2.1 bar
Max Pressure: 4.8 bar at 25°C
2.1 bar at 80°C

Retention Ratings (99.98%)

99.98% specified micron rating

Flow Characteristics

MAXGUARD filters are capable of filtering 340 L / min per 40".

Recommended Change Out Pressure

2.41 bar (32 psi)

Dimensions (Nominal)

Cartridge Code	Micron Rating at Various Efficiencies				
	99.98%	99.90%	99%	98%	95%
POLYPROPYLENE					
MXGP005	0.5	0.4	0.2	>0.2	>0.1
MXGP020	2	1.4	0.4	0.2	>0.1
MXGP050	5	3.8	1.2	0.3	>0.1
MXGP100	10	7	3	0.9	>0.2
MXGP200	20	18	5	2	>0.2
MXGP400	40	23	18	8	>0.7

Ordering information

MXGP	<input type="checkbox"/>	-	<input type="checkbox"/>	-	SM
<hr/>					
Filter Media	Code	Micron	Code	Length (Nominal)	Code
Polypropylene	050	0.5µm	30	30" (750 mm)	Seal Material
	020	2.0µm	40	40" (1016 mm)	S Silicone
	050	5.0µm			
	100	10.0µm			
	200	20.0µm			
	400	40.0µm			

Retrofits
740 series
HOUSING RANGE



BAG Filters

Food and Beverage

Filter Cartridges

Parker | domnick
hunter




Parker domnick hunter's range of bag filters are manufactured from a variety of filter media each specifically chosen for its compatibility with a wide range of process liquids. Parker bag filters are of a fully welded design rather than sewn. No process liquid can bypass through needle holes caused by the sewing process or around a sewn ring. Parker domnick hunter's range of filter bags include:


Standard filter bags

Available in polypropylene, polyester and nylon from 1 to 1000 μ m.

Performance Characteristics

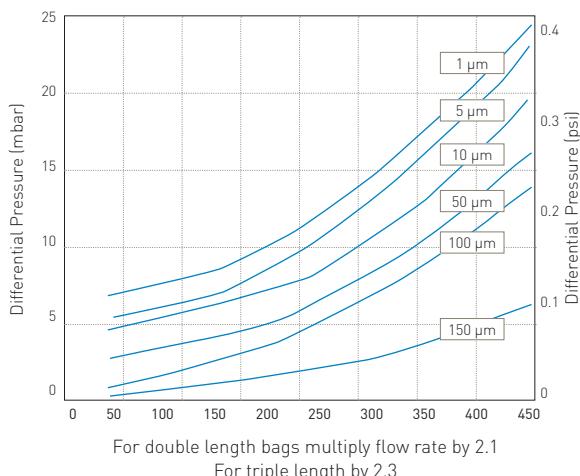

Filtration Stage

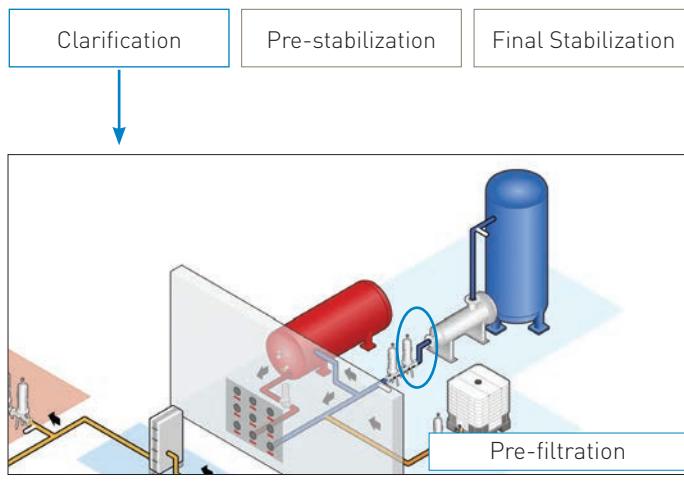



Specifications

Materials of Construction

■ Filtration Media:	Polypropylene Felt Polyester Felt Nylon Mesh
■ Ring:	Electro Plated Steel Stainless Steel Moulded Polypropylene Polypropylene

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177 and current EC1935 / 2004.



Viscous Flow Correction Factors

Fluid Viscosity [cps]	Viscous Correction Factors												
	10000	8000	6000	4000	2000	1500	1000	800	600	400	200	100	1
Flow rate (% water)	2.1	2.6	3.5	5	8	11	16	17	25	35	58	58	100

Compatibility

Material	Max Temperature	Organic Solvents	Oils and Fats	Alkalies	Organic Acids	Mineral Acids	Oxidising Agents	Resistance micro-organisms
Polypropylene	95°C [203°F]	Good	V. Good	Good	V. Good	Good	Fair	Fair
Polyester	150°C [302°F]	V. Good	V. Good	Good	Good	Good	Good	Good

Bag size	Diameter	Length	Surface Area	Volume	Max Flow Rate
1	7" [180 mm]	17" [435 mm]	0.25 m ²	11.0 ltr	20 m ³ /hr
2	7" [180 mm]	32" [810 mm]	0.5 m ²	20.5 ltr	40 m ³ /hr
1 (mini)	4" [104 mm]	9" [230 mm]	0.07 m ²	1.9 ltr	6 m ³ /hr
2 (mini)	4" [180 mm]	15" [380 mm]	0.12 m ²	3.2 ltr	10 m ³ /hr

Flow rate is dependant upon media type, micron rating and the fluid being filtered

Ordering information

Code Style	Code Diameter	Code Yarn	Code Media	Code Felt Rating	Code Mesh Rating	Code Ring	Code Ring			
SG Ring	7 Standard 4 Mini	1 Single 2 Double 3 Triple	P Polypropylene Felt S Polyester Felt	001 1* 005 5 010 10 025 25 050 50 100 100 150 150	045 45 100 100 150 150 250 250 500 500 800 800 999 1000	S Stainless Steel M Moulded PP P Polypropylene	H Handles L Loops			



BEVPOR WG Utilities


Filter Cartridges



Features

- Sterilizing grade PES membrane
- Highly asymmetrical pore structure
- Robust materials of construction can be repeatedly steam sterilized and hot water sanitized

Performance Characteristics

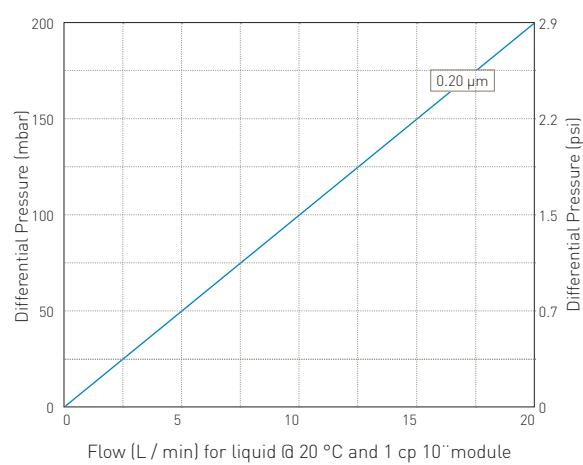

Minimizing the cost of microbiological control while maintaining quality and product protection is a key requirement for utility water treatment within beverage production.

BEVPOR WG is an advanced membrane filter cartridge designed for the beverage industry to meet and surpass these criteria. Specifically developed as a beverage grade cartridge, BEVPOR WG utilizes an advanced polyethersulphone membrane configured to provide high flow and cost-effective performance. The membrane has an asymmetric pore structure which provides graded filtration throughout its depth, resulting in increased capacity to hold contaminants. Componentry has been selected to maximize mechanical strength and chemical compatibility enabling the filter to withstand repeated chemical cleaning and sterilization.

Benefits

- Ensures safety of process water
- High flow and cost-effective performance
- Extended service life

Filtration Stage





Specifications

Materials of Construction

Filtration Media:	Polyethersulphone
Upstream Support:	Polypropylene
Downstream Support:	Polypropylene
Inner Support Core:	Polypropylene
Outer Protection Cage:	Polypropylene
End Caps:	Polypropylene
End Cap Insert:	316L Stainless Steel
O-rings:	Silicone / EPDM

Food Contact Compliance

Food Contact Components
Materials conform to the relevant
requirements of FDA 21CFR Part
177, current EC1935 / 2004 and current USP
Plastics Class VI - 121 °C.



Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.5 m² (5.38 ft²)

Cleaning and Sterilization

BEVPOR WG cartridges can be repeatedly steam sterilized in-situ or autoclaved at up to 130°C (266°F). They can be sanitized with hot water at up to 90°C (194°F) and are compatible with a wide range of chemicals.

Please refer to our Clean in Place support guide or contact your local Parker representative for more information.

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number. Additionally, each module displays a unique serial number providing full manufacturing traceability.

Temperature		Max Forward dP	
°C	°F	[bar]	[psi]
20	68	5.0	72.5
40	104	4.0	58.0
60	140	3.0	43.5
80	176	2.0	29.0
90	194	1.0	14.5
>100 [steam]	>212 [steam]	0.3	4.0

Ordering information

BWG	-	
		Code Length (Nominal)

	-	
Code Micron		Code End Cap [10 inch]
02 0.2 μ m		C BF / 226 Bayonet D Fin / 222 E Flat Top / 222 G Recess / 222 H UF Retrofit R BF / 222 Bayonet

VSH & HSL HOUSING RANGE AVAILABLE



BEVPOR MS Utilities

Filter Cartridges


Parker | **domnick** **hunter**



Features

- Sterilizing grade PES membrane
- Highly asymmetrical pore structure
- Robust materials of construction can be repeatedly steam sterilized and hot water sanitized
- Easily integrity tested in-situ

Performance Characteristics

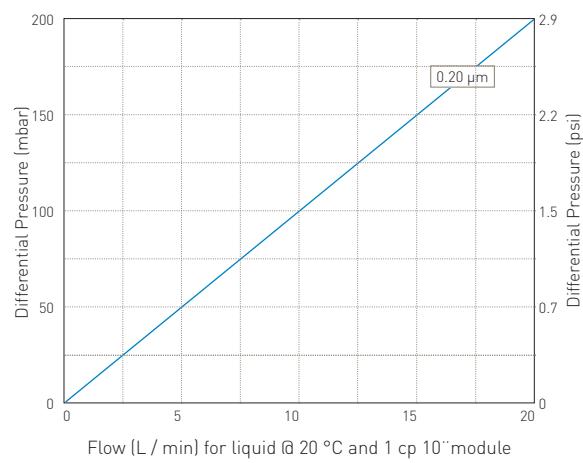

Minimizing the cost of microbiological control while maintaining quality and product protection is a key requirement for utility water treatment within beverage production. BEVPOR MS is an advanced membrane filter cartridge designed for the beverage industry to meet and surpass these criteria.

Specifically developed as a beverage grade cartridge, BEVPOR MS utilizes an advanced polyethersulphone membrane configured to provide high flow and cost-effective performance. The membrane has an asymmetric pore structure which provides graded filtration throughout its depth, resulting in increased capacity to hold contaminants. Componentry has been selected to maximize mechanical strength and chemical compatibility enabling the filter to withstand repeated chemical cleaning and sterilization.

Benefits

- Ensures safety of process water
- High flow and cost-effective performance
- Extended service life
- Assured filtration performance

Filtration Stage





Specifications

Materials of Construction

Filtration Media:	Polyethersulphone
Upstream Support:	Polyester
Downstream Support:	Polyester
Inner Support Core:	Polypropylene
Outer Protection Cage:	Polypropylene
End Caps:	Nylon
End Cap Insert:	316L Stainless Steel
O-rings:	Silicone / EPDM

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.



Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperature °C	Temperature °F	Max Forward dP (bar)	Max Forward dP (psi)
20	68	5.0	72.5
40	104	4.0	58.0
60	140	3.0	43.5
80	176	2.0	29.0
90	194	1.0	14.5
>100 (steam)	>212 (steam)	0.3	4.0

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.6 m² (6.5 ft²)

Cleaning and Sterilization

BEVPOR MS cartridges can be repeatedly steam sterilized in-situ or autoclaved at up to 130 °C (266 °F). They can be sanitized with hot water at up to 90 °C (194 °F) and are compatible with a wide range of chemicals.

For detailed operational procedures and advice on cleaning and sterilization, please contact the Technical Support Group through your usual Parker domnick hunter contact.

Retention Characteristics

0.2µm BEVPOR MS filters have been validated to provide sterile effluent after bacterial challenge testing following ASTM F838-05 methodology on 10" cartridges with more than 10⁷ cfu per cm² using *Brevundimonas diminuta*.

In addition, challenges with the following EU regulated organisms have been performed.

Organism	LRV when challenged with a minimum of 10 ⁷ cfu per cm ²
	0.20
<i>Serratia marcescens</i>	FR
<i>Escherichia coli</i>	FR
<i>Enterococcus faecalis</i>	FR
<i>Clostridium perfringens</i>	FR
<i>Pseudomonas aeruginosa</i>	FR

Ordering information

BMS	-	
<hr/>		
Code		Length (Nominal)
1	10"	(250 mm)
2	20"	(500 mm)
3	30"	(750 mm)
4	40"	(1000 mm)

	-		
<hr/>			
Code		End Cap (10 inch)	Code
02	0.2 µm	C BF / 226 Bayonet	S Silicone
		D Fin / 222	E EPDM
		E Flat Top / 222	
		G Recess / 222	
		R BF / 222 Bayonet	

Code O-rings

VSH & HSL
HOUSING RANGE
AVAILABLE



SPUNFLOW QN Utilities

Filter Cartridges



Features

- Thermally bonded polypropylene
- 90% nominal rated
- High throughput and low pressure loss


Graded density, high porosity, SPUNFLOW QN filter elements are manufactured from thermally bonded Polypropylene microfibers. Offering high throughputs, low pressure loss, high holding dirt capacity and long on-stream life, the bonded fibre construction minimizes any possibility of fibre migration and is rugged enough to resist particle shedding, even under pulse conditions.

Consisting only of pure polymer, SPUNFLOW QN is compatible with most chemical processes and contain no additives, leachables or extractables and is compliant with the requirements of the FDA for food and beverage contact. Elements can be incinerated to trace ash reducing disposal costs.


Benefits

- Ability to provide defined clarification under a wide particle loading of the feed solution
- Strong construction for stable retention
- Decreased system size and lower running costs provide an economical solution to clarification applications

Performance Characteristics

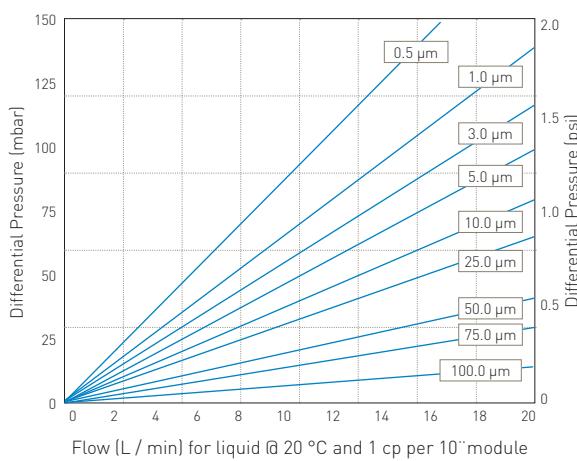

Filtration Stage

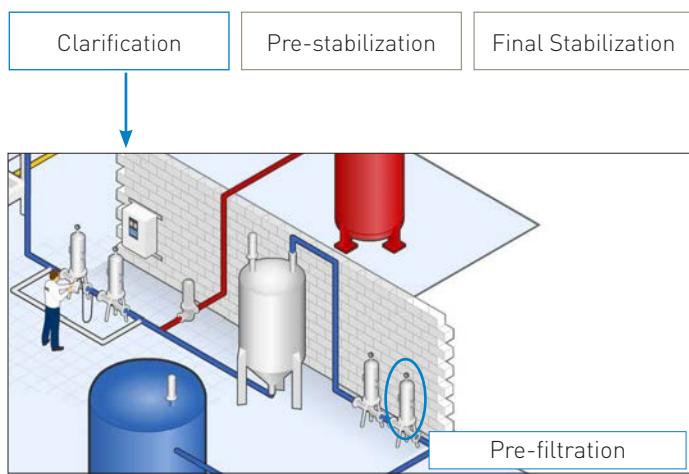



Specifications

Materials of Construction

■ Filtration Membrane:	Polypropylene Polyester / Nylon
■ End Caps:	Polypropylene Nylon
■ Standard o-rings:	Silicone

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177 and current EC1935 / 2004.



Recommended Operating Conditions

Maximum Temperature:
Polypropylene - 65°C (149°F)

Maximum Differential Pressure
4 bar at 20°C (68°F)

Maximum Recommended Differential Pressure
2 bar (29 psid)

Dimensions

Standard Cartridge
Outside diameter: 62 mm (2.44")
Inside diameter: 29 mm (1.14")

End Capped Cartridge

Outside diameter: 64 mm (2.51")
Inside diameter: 27 mm (1.06")

Ordering information

HIL, HSL & HIL MULTI HOUSING RANGE AVAILABLE



SPUNFLOW QA Utilities

Filter Cartridges

Parker | **domnick**
hunter



Features

- Absolute ratings from 0.5 to 120 micron
- Thermally bonded polypropylene
- High throughput and low pressure loss


SPUNFLOW QA cartridges are a range of absolute graded density filter elements, manufactured from thermally bonded polypropylene microfibers layered onto a resilient centre core. The construction consists of numerous, distinctive filter zones with coarser outer layers acting as prefilters for the tighter, absolute rated central zone. This profile produces an element possessing high voids volume, for flow rates high flow rates, low pressure loss, high dirt holding capacity and long life.

The thermally bonded media also eliminates fibre migration and resists the tendency to unload during service.


Benefits

- Ability to provide defined clarification under a wide particle loading of the feed solution
- Strong construction for stable retention
- Decreased system size and lower running costs provide an economical solution to clarification applications

Performance Characteristics

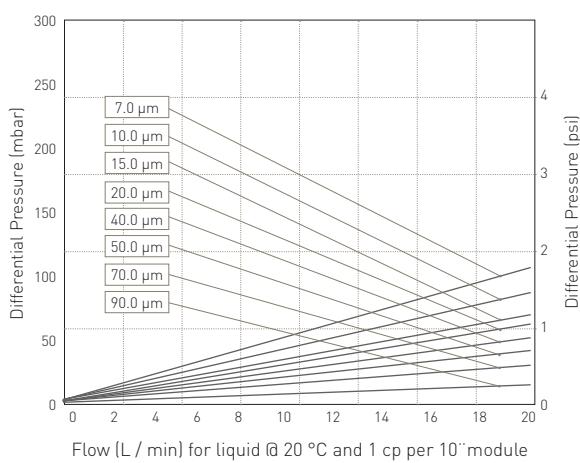

Filtration Stage

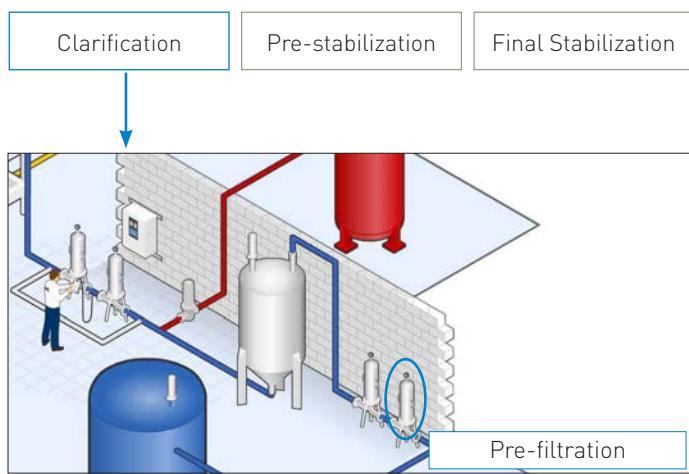



Specifications

Materials of Construction

Filtration Membrane:	Polypropylene
End Caps:	Polypropylene
	Nylon
Standard o-rings:	Silicone

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177 and current EC1935 / 2004.



Recommended Operating Conditions

Maximum Temperature:

Polypropylene - 65°C (149°F)

Maximum Differential Pressure

4 bar at 20°C (68°F)

Maximum Recommended Differential Pressure

Pressure

2 bar (29 psid)

Dimensions

Standard Cartridge

Outside diameter:	64 mm (2.52")
Inside diameter:	29 mm (1.14")

A caged version can be supplied in polypropylene 68mm (2.68")

Ordering information

QA	<input type="checkbox"/>
Code	Length (Nominal)
09	9.75" (247 mm)
10	9.875" (251 mm)
11	10" (254 mm)
19	19.50" (500 mm)
20	20" (508 mm)
29	29.50" (750 mm)
30	30" (762 mm)
39	39.25" (1000 mm)
40	40" (1016 mm)
<i>Other lengths available upon request</i>	

<input type="checkbox"/>	Material
P	Polypropylene

<input type="checkbox"/>	Micron
A5	0.5 µm
A7	0.7 µm
01	1 µm
03	3 µm
05	5 µm
07	7 µm
10	10 µm
15	15 µm
20	20 µm
40	40 µm
50	50 µm
70	70 µm
90	90 µm
CA	CA

<input type="checkbox"/>	End Fitting
0	DOE
2	Flat / 226
3	Flat / 222
6	Flat / 118 / 020
7	Fin / 226
8	Fin / 222
9	213
X	Plain
E	Ext Core

<input type="checkbox"/>	Seal Material
E	EPDM
S	Silicone

<input type="checkbox"/>	Cage Option
S	Standard
L	Light Cage
10"	40
20"	20
30"	20
40"	20

Code	Length (Nominal)	Material	Micron	End Fitting	Seal Material	Cage Option	Minimum Box Quantity
09	9.75" (247 mm)	P	Polypropylene	A5	0.5 µm	0	DOE
10	9.875" (251 mm)			A7	0.7 µm	2	Flat / 226
11	10" (254 mm)			01	1 µm	3	Flat / 222
19	19.50" (500 mm)			03	3 µm	6	Flat / 118 / 020
20	20" (508 mm)			05	5 µm	7	Fin / 226
29	29.50" (750 mm)			07	7 µm	8	Fin / 222
30	30" (762 mm)			10	10 µm	9	213
39	39.25" (1000 mm)			15	15 µm	X	Plain
40	40" (1016 mm)			20	20 µm	E	Ext Core
<i>Other lengths available upon request</i>				40	40 µm		
				50	50 µm		
				70	70 µm		
				90	90 µm		
				CA	CA		

**HIL, HSL & HIL MULTI
HOUSING RANGE
AVAILABLE**



CARBOFLOW MX

Utilities

Filter Cartridges

Parker | **domnick**
hunter



Features

- Solid piece, extruded construction
- High surface area

CARBOFLOW MX cartridges are offered in both high efficiency and general grades. They consist of bituminous coal sourced carbon, extruded together with an FDA listed thermoplastic binder, to produce an extremely porous yet rigid structure.


The result is a filter offering unsurpassed adsorptive capacity, up to 20 times that of traditional granular carbon or carbon impregnated filters, and high particle removal efficiency.

The rigid structure of CARBOFLOW MX not only minimizes any possibility of channeling, bypass or fluidizing, but also the release of carbon fines during start-up and operation. Such problems are common with more traditional carbon filters. CARBOFLOW MX is available in lengths up to 40" (1016 mm) together with end fittings to suit most industry standard housings.


Benefits

- No flow channeling associated with other forms of carbon filter. This aspect provides a consistent level of adsorption and particle retention throughout the filter's lifetime
- Small system sizes per application reduce the cost of filtration and return an economical solution

Performance Characteristics

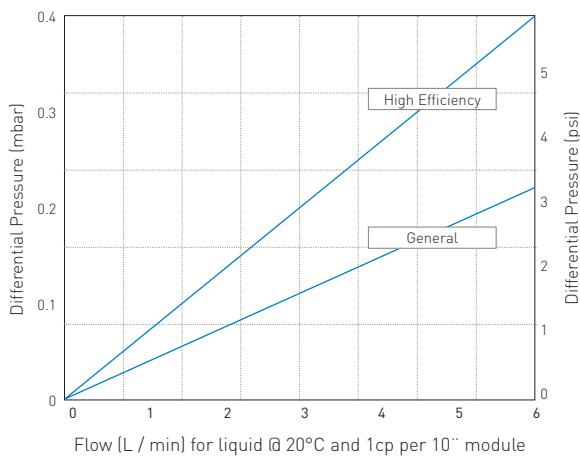

Filtration Stage

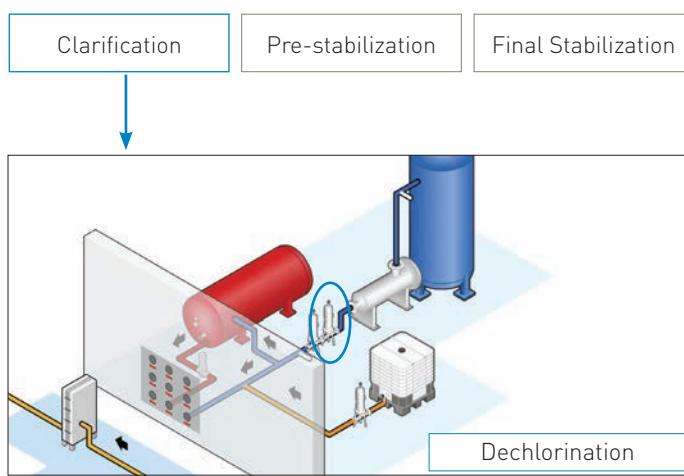



Specifications

Materials of Construction

Carbon:	Bituminous Coal
Carbon Type:	Steam activated
Carbon Weight (per 10''):	Acid wash 350g
End Caps:	Polypropylene

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.



Maximum Operating Temperature

60°C (158°F)

Maximum Differential Pressure

7 bar (101.52 psi)

Recommended Change Out Pressure

2 bar (29 psi)

Retention Characteristics

	1 High Efficiency	2 General
Particle Removal	99.9% @ 2 mic	98% @ 10 mic
Chlorine Reduction**	76 cu.m @ 4 l/min	22.7 cu.m @ 4 l/min
Chloroform Reduction*	3 cu.m @ 2 l/min	n/a

* Per 10" element, for longer lengths multiply pro-rata for details of test conditions contact Parker domnick hunter for details.
** Based on an inlet concentration of 2 ppm chlorine.

**** Based on an inlet concentration of 2 ppm chlorine.**

Applications

- Pre and post R.O. filtration
- De-chlorination
- Process water
- Product rinse waters
- De-colourization

Ordering information

 -					
Code Flow Path	Code Length	Code Type	Code Grade	Code End Fitting	Code Seal Material
C Carbon		M Extruded			
05 4.75" (124 mm)			1 High Efficiency	0 DOE	E EPDM
09 9.75" (247 mm)			2 General	2 Flat / 226	S Silicone
10 9.875" (251 mm)				3 Flat / 222	
11 10" (254 mm)				7 Fin / 226	
19 19.50" (500 mm)				8 Fin / 222	
20 20" (508 mm)				9 213	
29 29.50" (750 mm)				S SOE	
30 30" (762 mm)					
39 39.25" (1000 mm)					
40 40" (1016 mm)					

**HIL, &
HIL MULTI
HOUSING RANGE
AVAILABLE**



Steam Filters Utilities


Filter Cartridges



Features

- Robust all welded 316L stainless steel construction
- 'JUMBO' filter configuration ensures maximum utilization of pipework capacity
- Available in culinary grade 1 micron absolute

Filtration Stage

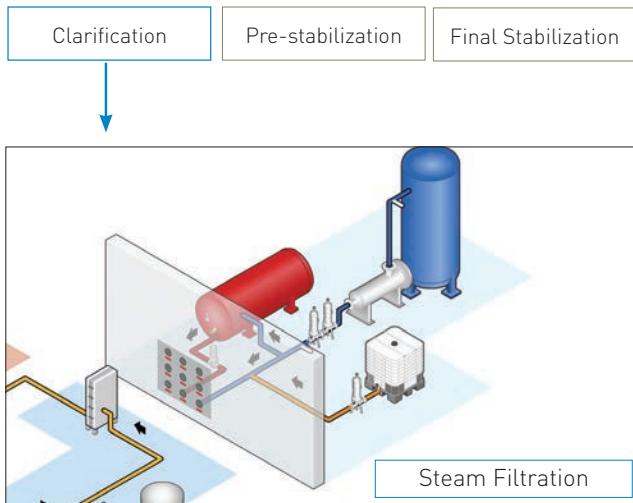

Steam filtration is often neglected or regarded as an add on to liquid or gas filtration applications.


It is however, a specific application and should be treated with the same level of importance as air, gas and liquid systems if longer filter lifetimes and overall system cost-effectiveness are to be achieved.

The quality of steam used within food and dairy industries has been raised higher on the agenda in an ever increasing number of companies. Minimum acceptable standards are now being quoted on a more regular basis with particular reference to 'culinary grade' steam. Steam serves several purposes in the food and beverage industry. It is critical that this steam is of a high quality to ensure effective and continuous operation of the process.

Benefits

- Long service life under extreme conditions
- Reduced operational cost
- Assures performance to 3A standard

Which filter for which application?

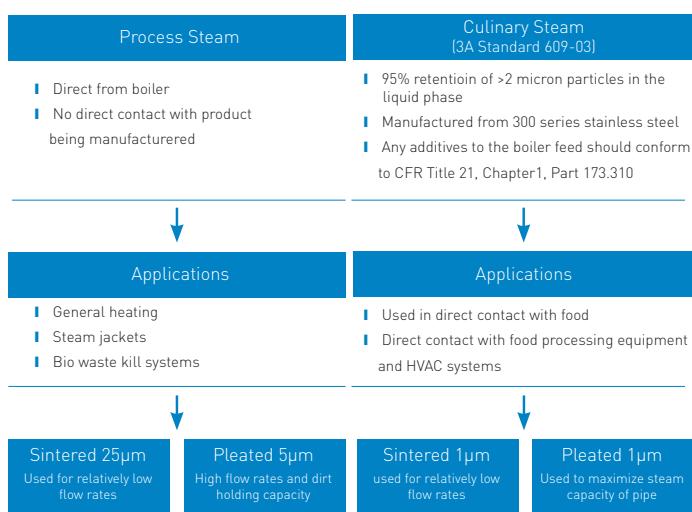



Specifications - Pleated

Materials of Construction

- Filtration Media: 316L Stainless Steel
- Inner Support Core: 316L Stainless Steel
- Outer Protection Cage: 316L Stainless Steel
- End Caps: 316L Stainless Steel
- Standard o-rings/gaskets: EPDM (Standard)
Silicone and Viton
(options available)

Recommended Operating Conditions

The maximum differential pressure in direction of flow (outside to in) is 10 barg (145.03 psig).

The maximum differential pressure in direction of flow (in to outside) is 2 barg (29.00 psig).

The maximum recommended continuous operating temperature range is -75 °C (-103 °F) to +200 °C (392 °F).

Note: Temperature dependant on o-ring compound

Effective Filtration Area (EFA)

10" (250 mm) 0.15 m² (1.61 ft²)

Housing Materials of Construction

- Material: 316L Stainless Steel
- Surface Finish
 - Single Internal: Electropolished Ra 0.8
 - Single External: Mechanical Polish (Commercial Bright)
 - Jumbo Internal: Upstream - Beadblast
Outlet Assembly - Finished 180 grit
 - Jumbo External: Beadblast
- Vent / Drain
 - Single / Jumbo: 1/4" BSPP Female Thread
- Seal Material: EPDM Aseptic Seal

Housing Design Pressure and Temperature

Single:	16 barg (232 psig) @ 200 °C (392 °F)
Jumbo:	7 barg (101 psig) @ 170 °C (338 °F)





Figure	Housing Code	Connection Size	Capacity Kg / hr @ 1 barg	Overall Height	Replacement Filter Code
1 1	HBAHP01KY HBAHP01C	1.5" (38.1 mm) 2" (50.8 mm)	<100 mbar or 40 m /sec 150 280	14.8" (376 mm) 20.7" (526 mm)	ZCHS-K-...C ZCHS-1-...C
2 2	VISCE-01J-D VISCE-01J-E VISCE-03J-G VISCE-03J-H	3" (50.8 mm) 4" (101.6 mm) 6" (152.4 mm) 8" (203.2 mm)	750 1300 2300 3750	30.0" (763 mm) 35.2" (895 mm) 41.2" (1049 mm) 48.7" (1237 mm)	ZCHS-J-...3 ZCHS-J-...4 3 x ZCHS-J-...3 3 x ZCHS-J-...4



Note: For efficient steam distribution it is recommended that steam velocities are restricted to 25 m / sec⁻¹. For more information on the HBA range, please contact Parker domnick hunter.

Correction Factors

To use the table above, the steam flow rates must be at 1 barg (14.50 psig). For system flows at different line pressures, divide the system flow by the correction factor to find the equivalent flow @ 1 barg (14.50 psig).

Steam Pressure	0	1	2	3	4	5	6	7	8	9	10
Correction Factor	0.5	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5

Table showing the relative system size difference between pleated cartridges left and sintered cartridges right.

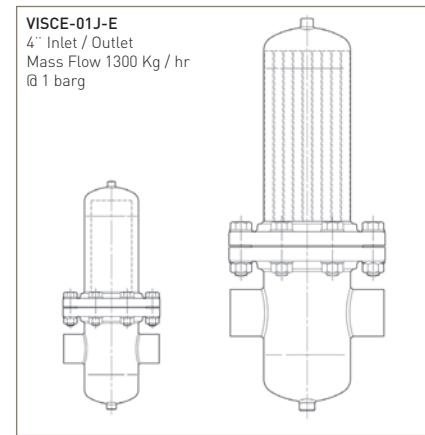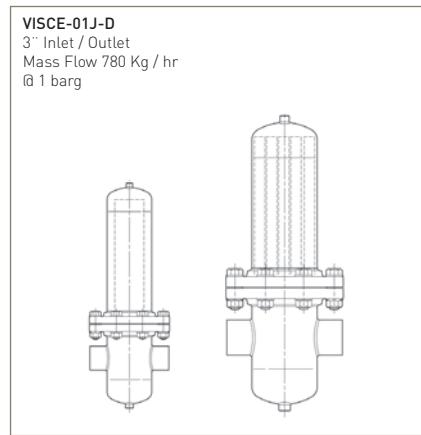

Parker domnick hunter has a continuous policy of product development and although the Company reserves the right to change specifications, it attempts to keep customers informed of any alterations. This publication is for general information only and customers are requested to contact our Process Filtration Sales Department for detailed information and advice on a products suitability for specific applications. All products are sold subject to the company's standard conditions of sale.

DS_FBG_19_01/14 Rev. 1B

Steam Filters Utilities

Filter Cartridges

Specifications - Sintered

Materials of Construction

■ Filtration Media:	Sintered Stainless Steel (316L)
■ End Caps:	316L Stainless Steel
■ Standard o-rings/gaskets:	EPDM (Standard) Silicone and Viton® (options available)

Recommended Operating Conditions

The maximum differential pressure in direction of flow (outside to in) is 10 barg (145.03 psig).

The maximum differential pressure in direction of flow (in to outside) is 5 barg (72.51 psig).

The maximum recommended continuous operating temperature range is -75 °C (-103 °F) to +200 °C (392 °F).


Note: Temperature dependant on o-ring compound

Housing Materials of Construction

■ Material:	316L Stainless Steel
■ Surface Finish	
Internal:	Electropolished Ra 0.8
External:	Mechanical Polish (Commercial Bright)
■ Vent / Drain:	1/4" BSPP Female Thread (Supplied with Plug)
■ Seal Material:	EPDM Aseptic Seal

Housing Design Pressure and Temperature

16 barg (232 psig) @ 200°C (392°F)

1	Figure	Housing Code	Connection Size	Capacity Kg / hr @ 1 barg	Overall Height	Replacement Filter Code
	1 1 1	HBAHP01KY HBAHP01C HBAHP012C	1.5" (38.1 mm) 2" (50.8 mm) 2" (50.8 mm)	<100 mbar or 40 m / sec 1 µm 25 µm 21 45 40 160 82 280	14.8" (376 mm) 20.7" (526 mm) 30.5" (776 mm)	ZCSS1-...C ZCSS1-...C ZCSS2-...C

Note: For efficient steam distribution it is recommended that steam velocities are restricted to 25 m / sec¹. For more information on the HBA range, please contact Parker domnick hunter.

Correction Factors

To use the table above, the steam flow rates must be at 1 barg (14.50 psig). For system flows at different line pressures, divide the system flow by the correction factor to find the equivalent flow @ 1 barg (14.50 psig).

Steam Pressure	0	1	2	3	4	5	6	7	8	9	10
Correction Factor	0.5	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5

Ordering information

ZCSS  - 		ZCHS  - 	
Code Length	Code Nominal Micron Rating Steam	Code End Cap [10"]	Code Nominal Micron Rating Steam

All cartridges supplied as single items

B 2.5" (65 mm)	001 1.0 µm (Culinary)	B 2.5" (65 mm)	001 1.0 µm (Culinary)
A 5" (125 mm)	025 25.0 µm	A 5" (125 mm)	005 5.0 µm
K 5" (125 mm)		K 5" (125 mm)	
1 10" (250 mm)		1 10" (250 mm)	
2 20" (500 mm)		2 20" (500 mm)	
3 30" (750 mm)		3 30" (750 mm)	
4 40" (1000 mm)		J JUMBO	

All cartridges supplied as single items

SINTERED Stainless Steel Retrofit Cartridge Part Numbers - 1.0 µm & 25 µm

Parker domnick hunter Cartridge Retrofit Cartridge	DS-R 3/1 DS-R 3/1.4 DS-R 4/1.5 DS-R 4/2.5 DS-R 5/2.5 DS-R 5/3 DS-R 10/3 DS-R 15/3 DS-R 20/3 DS-R 30/3 DS-R 30/5
Parker domnick hunter Cartridge Retrofit Cartridge	GS3/1 GS3/1.5 GS4/1.5 GS4/2.5 GS5/2.5 GS5/3 GS10/3 GS15/3 GS20/3 GS30/3 GS30/5 SS3/1 SS3/1.5 SS4/1.5 SS4/2.5 SS5/2.5 SS5/3 SS10/3 SS15/3 SS20/3 SS30/3 SS30/5
Parker domnick hunter Cartridge Retrofit Cartridge	DS-R 02/05 DS-R 02/10 DS-R 03/05 DS-R 03/10 DS-R 04/10 DS-R 04/20 DS-R 05/20 DS-R 05/25 DS-R 07/25 DS-R 07/30 DS-R 10/30 DS-R 15/30 DS-R 20/30 DS-R 30/30 DS-R 30/50 GS02/05 GS02/10 GS03/05 GS03/10 GS04/10 GS04/20 GS05/20 GS05/25 GS07/25 GS07/30 GS10/20 GS15/30 GS20/30 GS30/30 GS30/50 SS02/05 SS02/10 SS03/05 SS03/10 SS04/10 SS04/20 SS05/20 SS05/25 SS07/25 SS07/30 SS10/30 SS15/30 SS20/30 SS30/30 SS30/50
Parker domnick hunter Cartridge Retrofit Cartridge	PDS-R 02/05 PDS-R 02/10 PDS-R 03/05 PDS-R 03/10 PDS-R 04/10 PDS-R 04/20 PDS-R 05/20 PDS-R 05/25 PDS-R 07/25 PDS-R 07/30 PDS-R 10/30 PDS-R 15/30 PDS-R 20/30 PDS-R 30/30 PDS-R 30/50 P-GS02/05 P-GS02/10 P-GS03/05 P-GS03/10 P-GS04/10 P-GS04/20 P-GS05/20 P-GS05/25 P-GS07/25 P-GS07/30 P-GS10/30 P-GS15/30 P-GS20/30 P-GS30/30 P-GS30/50 P-SS02/05 P-SS02/10 P-SS03/05 P-SS03/10 P-SS04/10 P-SS04/20 P-SS05/20 P-SS05/25 P-SS07/25 P-SS07/30 P-SS10/30 P-SS15/30 P-SS20/30 P-SS30/30 P-SS30/50



Parker | **domnick** **hunter**



Specifications - Sintered retrofit cartridges

Materials of Construction

Filtration Media:	Sintered Stainless Steel (316L)
End Caps:	316L Stainless Steel
Standard o-rings/gaskets:	EPDM (Standard) Silicone and Viton® (options available)

Recommended Operating Conditions

The maximum differential pressure in direction of flow (outside to in) is 10 barg (145.03 psig).

The maximum differential pressure in direction of flow (in to outside) is 5 barg (72.51 psig).

The maximum recommended continuous operating temperature range is -75 °C (-103 °F) to +200 °C (392 °F).

Note: Temperature dependant on o-ring compound

Ordering Information

SINTERED retrofit cartridges

Code Micron	Code Length (Nominal)	Code Diameter (Nominal)	Code End Cap (10")	
P 1 micron	02 2" (65 mm)	05 1"	UP 2 x o-ring	
S 25 micron	03 3" (125 mm)	10 1"	UR 1 x o-ring & thread	
All cartridges supplied as single items	04 4" (125 mm)	20 2"	UI 2 x o-ring & thread	
	05 5" (250 mm)	25 2.5"		
	07 7" (500 mm)	30 3"		
	10 10" (750 mm)	50 5"		
	15 15" (750 mm)			
	20 20" (750 mm)			
	30 30" (750 mm)			

Description	L	D	Diagram	Description	L	D	Diagram	Description	L	D	Diagram
ZP/ZS 0310 UR	88	40		ZP/ZS 0210 UP	-			ZP/ZS 0205 UI	75	35	
ZP/ZS 0315 UR	88	40		ZP/ZS 0310 UP	86	35		ZP/ZS 0210 UI	93	35	
ZP/ZS 0415 UR	124	40		ZP/ZS 0305 UP	-	-		ZP/ZS 0305 UI	89	35	
ZP/ZS 0425 UR	125	54		ZP/ZS 0410 UP	114	35		ZP/ZS 0310 UI	93	35	
ZP/ZS 0525 UR	152	54		ZP/ZS 0420 UP	117	40		ZP/ZS 0410 UI	121	35	
ZP/ZS 0530 UR	148	76		ZP/ZS 0520 UP	141	40		ZP/ZS 0420 UI	127	40	
ZP/ZS 1030 UR	269	76		ZP/ZS 0525 UP	141	54		ZP/ZS 0520 UI	151	40	
ZP/ZS 1530 UR	405	76		ZP/ZS 0725 UP	193	54		ZP/ZS 0525 UI	151	54	
ZP/ZS 2030 UR	532	76		ZP/ZS 0730 UP	196	76		ZP/ZS 0725 UI	203	54	
ZP/ZS 3030 UR	784	76		ZP/ZS 1030 UP	269	76		ZP/ZS 0730 UI	206	76	
ZP/ZS 3050 UR	774	130		ZP/ZS 1530 UP	396	76		ZP/ZS 1030 UI	279	76	
				ZP/ZS 2030 UP	523	76		ZP/ZS 1530 UI	406	76	
				ZP/ZS 3030 UP	775	76		ZP/ZS 2030 UI	533	76	
				ZP/ZS 3050 UP	775	76		ZP/ZS 3030 UI	785	76	
								ZP/ZS 3050 UI	785	130	

Viton® is a registered trademark of DuPont Performance Elastomers L.L.C..

Parker domnick hunter has a continuous policy of product development and although the Company reserves the right to change specifications, it attempts to keep customers informed of any alterations. This publication is for general information only and customers are requested to contact our Process Filtration Sales Department for detailed information and advice on a products suitability for specific applications. All products are sold subject to the company's standard conditions of sale.

DS_FBG_19_01/14 Rev. 1B





Air & Gas collection

The treatment of gases in food and beverage production and packaging processes is of critical importance to protect the food from hazards which could otherwise deteriorate food quality or even worse, endanger human health.

With particular expertise in sterile gas filtration technology, Parker domnick hunter have continually innovated novel gas filtration solutions for the food industries. The range of gas filtration products and services have been designed to deliver optimum operational performance and maintain the commitments of; protecting food quality, reducing production costs and providing specialist support for the food industries.

www.parker.com/dhb beverage



HIGH FLOW BIO-X

Air & Gas

Filter Cartridges

Parker | **domnick**
hunter



Features

- High flowing hydrophobic PTFE impregnated media
- Fully validated by aerosolized bacterial and viral challenge
- Stainless steel inner core
- 100% integrity testable by Valairdata 3 aerosol challenge

HIGH FLOW BIO-X sterile gas filters combine proven depth filter technology and a pleated construction to provide retention down to 0.01 micron in gas.


Flow rates typically 2-3 times that of membrane filters make HIGH FLOW BIO-X the filter that can dramatically reduce cartridge usage and installation size within the fermentation, food and beverage industries.

The specially developed PTFE impregnation process imparts greater strength and permanent hydrophobicity to the borosilicate microfibre media. This leads to excellent performance in applications such as the provision of sterile gas in filling machines.

Benefits


- Reduce system size and reduced total cost of ownership.
- Provides complete process security
- Strong and robust for extended service life
- Guaranteed performance in-situ

Performance Characteristics

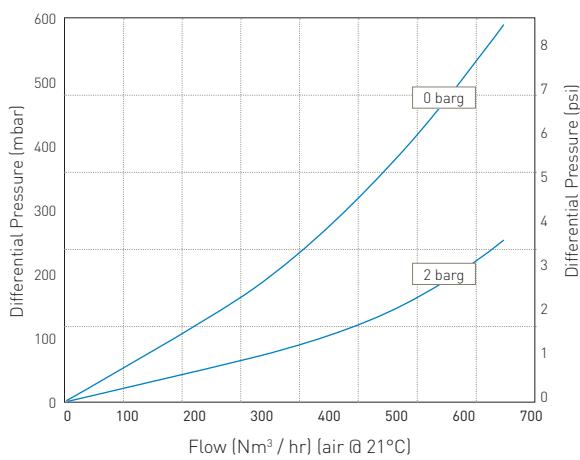

Filtration Stage

Sterile Gas and Vent Filtration

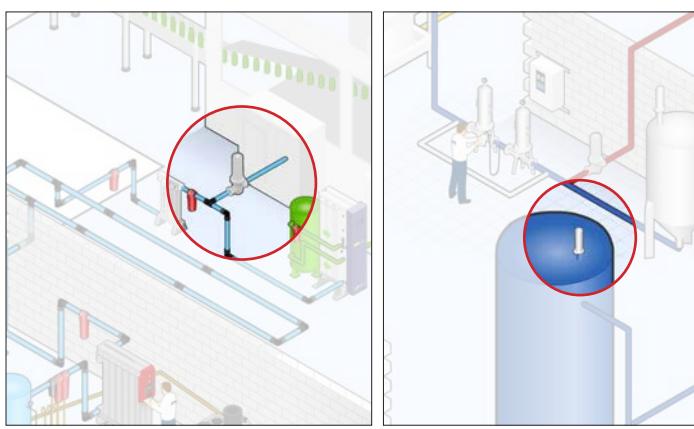



Specifications

Materials of Construction

■ Filtration Media:	PTFE Impregnated Borosilicate Microfibre
■ Upstream Support:	Polypropylene
■ Downstream Support:	Polypropylene
■ Inner Support Core:	316L Stainless Steel
■ Outer Protection Cage:	Polypropylene
■ End Caps:	Polypropylene
■ End Cap Insert:	Polyethersulphone
■ Standard o-rings/gaskets:	Silicone

Food Contact Compliance

Parker domnick hunter's range of HIGH FLOW BIO-X filters are



intended for indirect food contact and as such are manufactured from materials suitable for the sterilization of compressed gasses within food and beverage applications. Materials conform to the relevant requirements of the United States FDA 21 CFR part 177 and USP Plastics Class VI – 121°C.

Recommended Operating Conditions

The maximum differential pressure in direction of flow (outside to in) is 3.5 barg (50.76 psig) at 70 °C (158 °F).

The maximum recommended continuous operating temperature is 70 °C (158 °F).

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.38 m² (4.09 ft²)

Sterilization

HIGH FLOW BIO-X cartridges can be in-situ steam sterilized or autoclaved up to 142 °C (287.6 °F) for a maximum of 150 steam cycles.

For detailed operational procedures and advice on cleaning and sterilization, please contact the Technical Support Group through your usual Parker domnick hunter contact.

Integrity Test Data

All cartridges are integrity tested prior to despatch by the aerosol challenge test method using the Parker domnick hunter VALAIRDATA 3.

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number. Additionally, each module displays a unique serial number providing full manufacturing traceability.

Retention Characteristics

The HIGH FLOW BIO-X range of cartridges has been fully validated by aerosol bacterial challenge with challenge levels of 10¹² *Brevundimonas diminuta* per 10" (250 mm) filter cartridge. Independent test work also shows full retention to *MS-2 Coliphage*.

Ordering information

ZCHB	-	□
<hr/>		
Code	Length (Nominal)	
B*	2.5" (65 mm)	
A*	5" (125 mm)	
K	5" (125 mm)	
1	10" (250 mm)	
2	20" (500 mm)	
3	30" (750 mm)	
4	40" (1000 mm)	
<i>*Supplied in packs of 3</i>		

□	-	□
<hr/>		
Code	End Cap (10 inch)	
C	P-7	
P	BIO-X Retrofit	
H	UF Retrofit	
<hr/>		
Code	End Cap (Demi)	
H	UF Retrofit	
T	TRUESEAL	
Y	Demi MCY	
Z	Demi A & B Std	

□	-	□
<hr/>		
Code	O-rings	
E	EPDM	
S	Silicone	
V	Viton	
<i>*Silicone o-ring supplied as standard without having to specify 'S' code</i>		

**HBA & HPG
HOUSING RANGE
AVAILABLE**



BIO-X II

Air & Gas

Filter Cartridges



Features

- Robust stainless steel componentry
- Fully validated by aerosolized bacterial and viral challenge
- 100% integrity testable by Valairdata 3 aerosol challenge

BIO-X II air sterilization filter cartridges utilize a borosilicate microfibre media. This media has proven to be particularly effective in the removal of sub-micron particles as small as 0.01 micron, therefore ensuring the removal of all microorganisms, including bacteria and viruses.


The media is sandwiched between polyaramid support materials to provide additional strength and prevent media migration. This is rigidly held between stainless steel support cylinders and finally encapsulated into stainless steel end caps. The result is a filter cartridge with the exceptional strength and efficiency necessary for absolute security in the most testing of applications.

BIO-X II filter cartridges are particularly suitable for the increasing number of high temperature applications. They also fulfil the sterile compressed air and gas requirements of the dairy, brewery and food processing industries.

Benefits


- High temperature operation up to 200°C (392°F)
- Process security under demanding conditions
- Guaranteed performance in-situ

Performance Characteristics

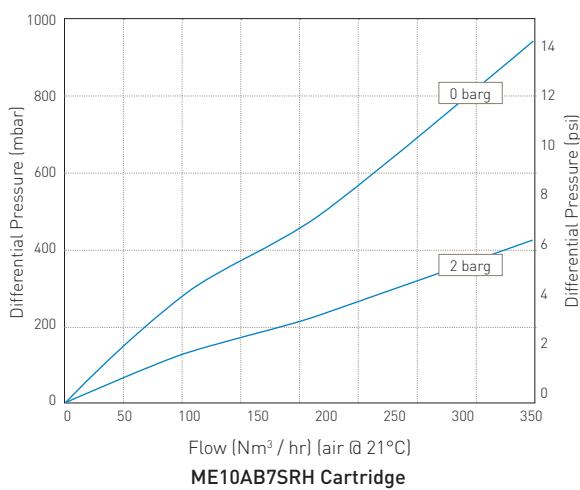

Filtration Stage

Sterile Gas and Vent Filtration

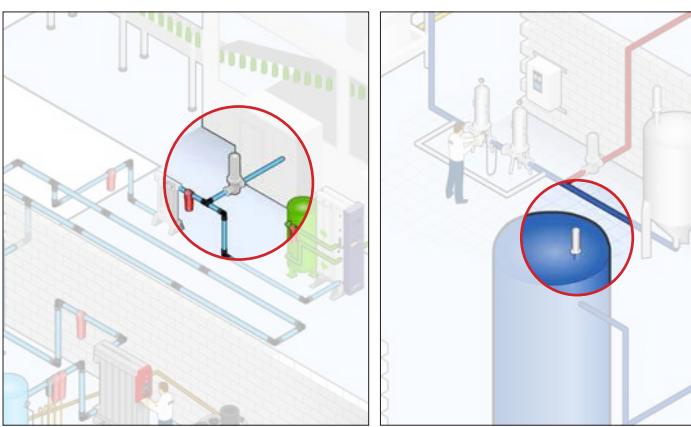



Specifications

Materials of Construction

■ Filtration Media:	Borosilicate
	Microfibre
■ Upstream Support:	Polyaramid
■ Downstream Support:	Polyaramid
■ Inner Support Core:	Stainless Steel
■ Outer Protection Cage:	Stainless Steel
■ End Caps:	Stainless Steel
■ Encapsulant:	Epoxy Resin
■ Standard o-rings/gaskets:	Silicone

Food and Biological Safety

Parker domnick hunter's range of BIO-X II filters are intended for indirect food contact and as such are manufactured from materials suitable for the sterilization of compressed gasses within Food and Beverage applications. Materials conform to the relevant requirements for non-fibre release as laid down in the United States FDA 21 CFR 211.72 and 210,3(b).(6).



Recommended Operating Conditions

The maximum differential pressure is 700 mbar for economical element change.

Maximum Continuous Inlet Air Temperature

200 °C (392 °F) Intermittent
170 °C (338 °F) Continuous

Sterilization

BIO-X II filter elements can withstand a maximum of 100 in-line sterilization cycles with purified saturated steam. In-line sterilization 142 °C (287.6 °F), 2.8 barg (40.7 psig) for 30 minutes.

For detailed operational procedures and advice on cleaning and sterilization, please contact the Technical Support Group through your usual Parker domnick hunter contact.

Integrity Test Data

All cartridges are integrity tested prior to despatch by the aerosol challenge test method using the Parker domnick hunter Valairdata 3.

Retention Characteristics

The BIO-X II range of cartridges have been fully validated by bacterial challenge of aerosolized *Brevundimonas diminuta*.

Ordering information

Element Code	Cartridge Length	End Cap Location
MER-BZ	2.5" (65 mm)	Demi A & B Std (Z)
MER-AZ	5" (125 mm)	Demi A & B Std (Z)
ME10-AB7SRH	10" (250 mm)	BS226 (C)
ME20-AB7-SRH	20" (500 mm)	BS226 (C)
ME30-AB7-SRH	30" (750 mm)	BS226 (C)

All BIO-X cartridges are supplied as single units

HBA, HPG & HSV
HOUSING RANGE AVAILABLE

BIO-X II Retrofit Cartridge Part Numbers

Parker domnick hunter Cartridge	ME3/1	ME3/1.5	ME4/1.5	ME4/2.5	ME5/2.5	ME5/3	ME10/3	ME15/3	ME20/3	ME30/3	ME30/5	
Retrofit Cartridge	SRF3/1	SRF3/1.5	SRF4/1.5	SRF4/2.5	SRF5/2.5	SRF5/3	SRF10/3	SRF15/3	SRF20/3	SRF30/3	SRF30/5	
<hr/>												
Parker domnick hunter Cartridge	MER2/10	MER3/10	MER4/20	MER5/20	MER5/25	MER7/25	MER7/30	MER10/30	MER15/30	MER20/30	MER30/30	MER30/50
Retrofit Cartridge	SRF02/10	SRF03/10	SRF04/20	SRF05/20	SRF05/25	SRF07/25	SRF07/30	SRF10/30	SRF15/30	SRF20/30	SRF30/30	SRF30/50
<hr/>												
Parker domnick hunter Cartridge	ME2/10	ME3/10	ME4/20	ME5/20	ME5/25	ME7/25	ME7/30	ME10/30	ME15/30	ME20/30	ME30/30	ME30/50
Retrofit Cartridge	P-SRF02/10	P-SRF03/10	P-SRF04/20	P-SRF05/20	P-SRF05/25	P-SRF07/25	P-SRF07/30	P-SRF10/30	P-SRF15/30	P-SRF20/30	P-SRF30/30	P-SRF30/50

Parker domnick hunter has a continuous policy of product development and although the Company reserves the right to change specifications, it attempts to keep customers informed of any alterations. This publication is for general information only and customers are requested to contact our Process Filtration Sales Department for detailed information and advice on a products suitability for specific applications. All products are sold subject to the company's standard conditions of sale.

DS_FBG_03_01/14 Rev. 1B



TETPOR AIR

Air & Gas

Filter Cartridges

Parker | domnick hunter



TETPOR AIR sterilization filter cartridges offer exceptional filtration performance while providing the highest levels of biosecurity throughout the process industry.

Operating at ambient temperature conditions, TETPOR AIR filter cartridges provide a cost-effective filtration solution. A unique polypropylene prefilter layer extends service life in heavily contaminated environments.

TETPOR AIR filter cartridges also utilize a well-proven, inherently hydrophobic expanded PTFE membrane validated as sterilizing grade in liquid in accordance with ASTM F838-05. This ensures the removal of all airborne bacteria, viruses and bacteriophage.


Features

- Highly hydrophobic PTFE membrane
- Fully validated to ASTM F838-05 liquid bacterial challenge
- Fully validated to aerosol and viral challenge

Benefits


- Prevents membrane blinding during high humidity conditions
- Provides sterile effluent in high humidity environments and increased product protection
- Can be integrity tested in-situ using Valairdata 3

Performance Characteristics

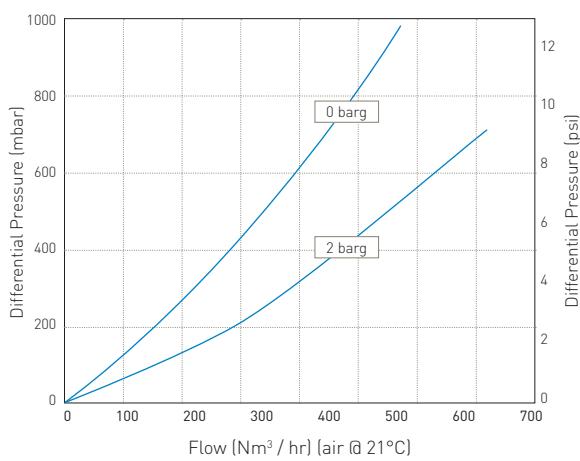

Filtration Stage

Sterile Gas and Vent Filtration

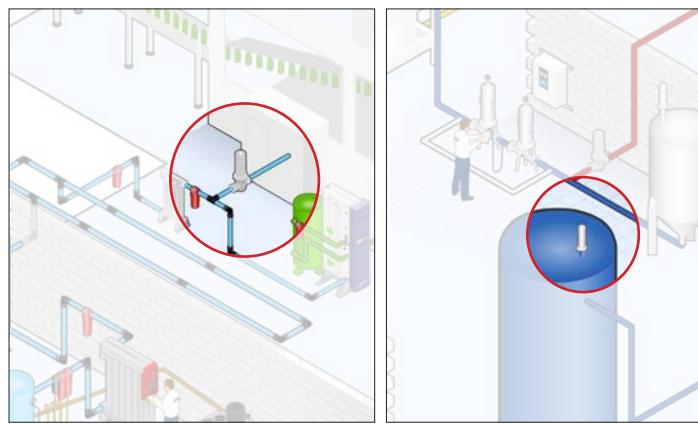



Specifications

Materials of Construction

■ Filtration Membrane:	Expanded PTFE
■ Upstream Support:	Polypropylene
■ Downstream Support:	Polypropylene

Filter Cartridges

■ Inner Support Core:	Polypropylene
■ Outer Protection Cage:	Polypropylene
■ End Caps:	Polypropylene
■ End Cap Insert:	316L Stainless Steel
■ Standard o-rings/gaskets:	Silicone

Food Contact Compliance

Parker domnick hunter's range of TETPOR AIR filters are intended for indirect food contact and as such are manufactured from materials suitable for the sterilization of compressed gasses within Food and Beverage applications. Materials conform to the relevant requirements of the United States FDA 21 CFR part 177 and USP Plastics Class VI - 121°C.



Recommended Operating Conditions

Filter Cartridges

Up to 60 °C (140 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperature		Max Forward dP	
°C	°F	(bar)	(psi)
20	68	5.0	72.5
40	104	4.0	58.0
60	140	3.0	43.5
80	176	2.0	29.0
90	194	1.7	24.6

Parker Hannifin certify that this product complies with the European Council Pressure Equipment Directive (PED) 97/23/EC Article 3, Paragraph 3 - Sound Engineering Practice (SEP). This product is intended for use with Group 1 & 2 Dangerous and Harmless Liquids and Group 2 Harmless Gases at the operating conditions stated in this document: In compliance with PED Article 3, Paragraph 3, SEP, this product does not bear the CE mark.

Effective Filtration Area

10" (250 mm):	0.77m ²	[8.28 ft ²]
K Size:	0.36m ²	[3.87 ft ²]
A Size:	0.25m ²	[2.69 ft ²]
B Size:	0.12m ²	[1.29 ft ²]
E Size:	0.06m ²	[0.64 ft ²]

Sterilization

	Autoclave		Steam-in-place	
	Cycles	Temp	Cycles	Temp (30 min)
Cartridges	120	142°C [287°F]	120	142°C [287°F]
DEMICAP	100	135°C [275°F]	-	-

For detailed operational procedures and advice on cleaning and sterilization, please contact the Technical Support Group through your usual Parker domnick hunter contact.

Integrity Test Data

All modules are integrity tested prior to despatch by diffusional flow. Values are for cartridges wetted with 60 / 40 IPA / Water.

Cartridge	Test Pressure (barg)	Diffusional Flow (psig)	(ml / min)
E	0.8	11.6	1.5
B	0.8	11.6	3.0
A	0.8	11.6	6.0
K	0.8	11.6	8.3
10"	0.8	11.6	17.7

Retention Characteristics

TETPOR AIR filter cartridges are validated by bacterial challenge testing with *Brevundimonas diminuta* to current ASTM F838-05 methodology (10^7 organisms / cm² EFA minimum) with typical in-house challenge levels being 1011 organisms per 10" (250 mm) filter cartridge.

In addition, TETPOR AIR filter cartridges are also validated by aerosol bacterial and MS-2 coliphage challenge testing.

Ordering information

ZCMT



/



Code	Length (Nominal)
B*	2.5" [65 mm]
A*	5" [125 mm]
K	5" [125 mm]
1	10" [250 mm]
2	20" [500 mm]
3	30" [750 mm]

*Supplied in packs of 3

Code	Micron
020	0.2

Code	End Cap [10"]
B*	dh DOE
C	BF / 226 Bayonet
D	Fin / 222
E	Flat Top / 222
F	BF / 216 / 218
G	Recess / 222
H	UF Retrofit
R	BF / 222 Bayonet

*EPDM gaskets supplied as standard

Code	End Cap [Demi]
SK	Retrofit
T	TRUESEAL
X	116
Y	Demi Sub
Z	Demi A & B Std

Code	Variant
A	Air / Gas

Code	O-rings
E	EPDM
P	PTFE Encapsulated Silicone
S*	Silicone
V	Viton

* Silicone o-ring supplied as standard without having to specify the 'S' code

HBA, HPG & HSV
HOUSING RANGE
AVAILABLE



HIGH FLOW TETPOR II

Air & Gas

Filter Cartridges

Parker | **domnick**
hunter



HIGH FLOW TETPOR II gas sterilization filters have been developed to benefit from technological advances within the manufacture of PTFE membranes. This new generation of filter sets the standard with an unrivalled combination of efficiency, flow rate and strength.

The HIGH FLOW TETPOR II is validated as a 0.2 micron sterilizing grade filter in liquids through ASTM F838-05 and 0.01 micron in gas through full retention to an aerosol challenge of MS2 phage. This ensures the filter will guarantee the sterility of your process in the worst-case scenario where the filter may be subjected to bulk liquid due to a process problem. Subtle changes to the structure of the hydrophobic PTFE have also resulted in the production of an extremely robust product now validated for 225 steam sterilization cycles @ 142 °C (287.6 °F). The combination of non-woven supports upstream of the membrane and an expanded net layer downstream has significant benefits. It provides increased protection and service life while guaranteeing zero fibre shedding into the process.


Features

- Highly hydrophobic PTFE membrane
- Fully validated to ASTM F838-05 liquid bacterial challenge
- Fully validated to aerosol and viral challenge
- Unique high flowing PTFE membrane
- Can be in-situ steam sterilized for up to 225 cycles at 142°C

Benefits


- Prevents membrane blinding during high humidity conditions
- Provides sterile effluent in high humidity environments and increased product protection
- Increased energy savings due to reduced pressure loss
- Long service life under aggressive processing conditions

Performance Characteristics

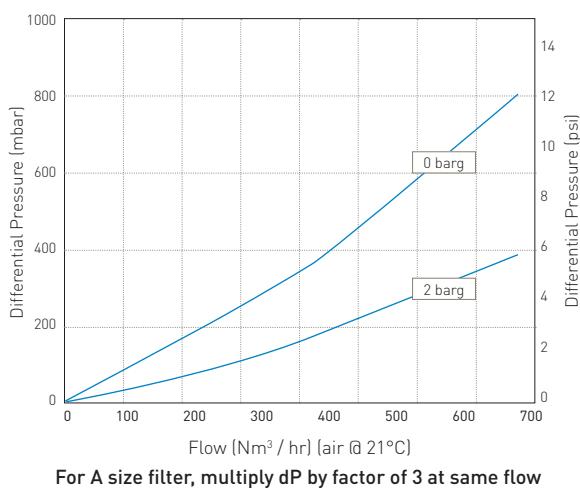

Filtration Stage

Sterile Gas and Vent Filtration

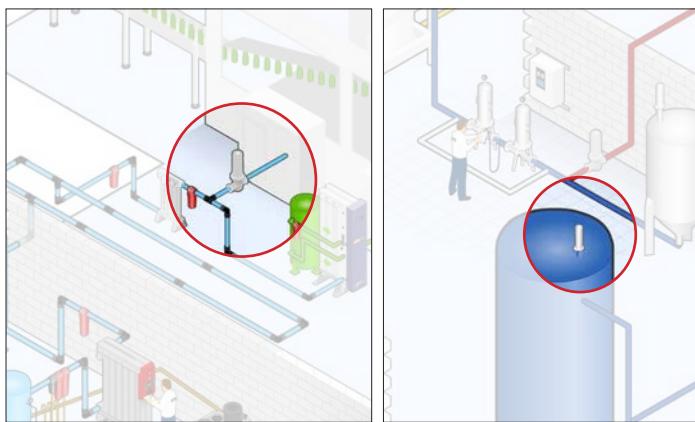



Specifications

Materials of Construction

Filtration Media:	Expanded PTFE
Upstream Support:	Polypropylene
Downstream Support:	Polypropylene
Inner Support Core:	316L Stainless Steel
Outer Protection Cage:	Polypropylene
End Caps:	Polypropylene
End Cap Insert:	Polysulphone
Standard o-rings/gaskets:	Silicone

Food Contact Compliance

Parker domnick hunter's range of HIGH FLOW TETPOR II filters are intended for indirect food contact and as such are manufactured from materials suitable for the sterilization of compressed gasses within Food and Beverage applications. Materials conform to the relevant requirements of the United States FDA 21 CFR part 177 and USP Plastics Class VI - 121°C.



Recommended Operating Conditions

The maximum differential pressure in direction of flow (outside to in) is 3.5 barg [50.76 psig] at 60 °C [140 °F].

The maximum recommended continuous inlet air temperature is 60 °C (140 °F).

Note: HIGH FLOW TETPOR II cartridges can be used as WFI vents in heated housings if changed on a 4-6 monthly basis.

Sterilization

HIGH FLOW TETPOR II cartridges can be in-situ steam sterilized for up to 225 cycles at 142 °C [287.6 °F].

For detailed operational procedures and advice on cleaning and sterilization, please contact the Technical Support Group through your usual Parker domnick hunter contact.

Retention Characteristics

HIGH FLOW TETPOR II cartridges have been fully validated as 0.2 micron sterilizing grade filter cartridges, for compressed air and gas applications. They exceed liquid bacterial challenge levels as recommended by ASTM+. In addition, HIGH FLOW TETPOR II is also validated by aerosol bacterial and MS-2 Coliphage challenge testing.

+ASTM American Society for Testing and Materials

Integrity Test Data

All modules are integrity tested prior to despatch by diffusional flow. Values are for cartridges wetted with 60 / 40 IPA / Water.

Cartridge	Test Pressure (barg)	Diffusional Flow (lpsig)	Flow (ml / min)
D	0.8	11.6	0.6
C	0.8	11.6	1.1
B	0.8	11.6	2.8
A	0.8	11.6	5.6
K	0.8	11.6	7.70
10"	0.8	11.6	16.5
20"	0.8	11.6	33.0
30"	0.8	11.6	49.5

Ordering information

ZHFT	/	<input type="text"/>
<hr/>		
Code	Length (Nominal)	
D*	1.5" (35 mm)	<input type="text"/>
C*	2.5" (65 mm)	<input type="text"/>
B*	2.5" (65 mm)	<input type="text"/>
A*	5" (125 mm)	<input type="text"/>
K	5" (125 mm)	<input type="text"/>
1	10" (250 mm)	<input type="text"/>
2	20" (500 mm)	<input type="text"/>
3	30" (750 mm)	<input type="text"/>
<hr/>		
<i>*Supplied in packs of 3</i>		

<input type="text"/>	-	<input type="text"/>
<hr/>		
Code	End Cap (10 inch)	
C	P-7	<input type="text"/>
P	BIO-X Retrofit	<input type="text"/>
H	UF Retrofit	<input type="text"/>
<hr/>		
Code	End Cap (Demi)	
H	UF Retrofit	<input type="text"/>
W	HF Demi C & D	<input type="text"/>
T	TRUESEAL	<input type="text"/>
Y	Demi MCY	<input type="text"/>
Z	Demi A & B Std	<input type="text"/>

<input type="text"/>	<input type="text"/>
<hr/>	
Code	O-rings
E	EPDM
P ^[1]	PTFE Encapsulated Silicone
S ^[2]	Silicone
V	Viton

^[1]Not available on C and D length variants

^[2]Silicone o-ring supplied as standard without having to specify the 'S' code

**HBA, HPG & HSV
HOUSING RANGE
AVAILABLE**



HIGH FLOW PREPOR GFA

Air & Gas

Filter Cartridges

Parker | domnick hunter



HIGH FLOW PREPOR GFA is a high capacity glass fibre prefilter specifically designed for the removal of bulk particulate from compressed air and gases.

It is used extensively for prefiltration duties in dry compressed air systems and provides excellent protection for final sterile filters.

HIGH FLOW PREPOR GFA utilizes pleated glass fibre filter media encased within an upstream and downstream expanded polypropylene mesh filter support. The pleat pack is supported by an inner stainless steel core and outer heat stabilized polypropylene cage, heat bonded to heat stabilized polypropylene end caps.

The combination of high voids volume filter media and pleated construction results in a filter cartridge with exceptional dirt holding capacity, able to operate at very low differential pressures.


Features

- High surface area and voids volume filter media
- Reliable efficient protection of final sterilization filters
- Retention to 1.0µm in gas

Benefits


- Exceptionally high flow rates with low pressure drops
- Reliable efficient protection of final sterilization filters
- Heat stabilized componentry to allow operation at elevated temperatures

Performance Characteristics

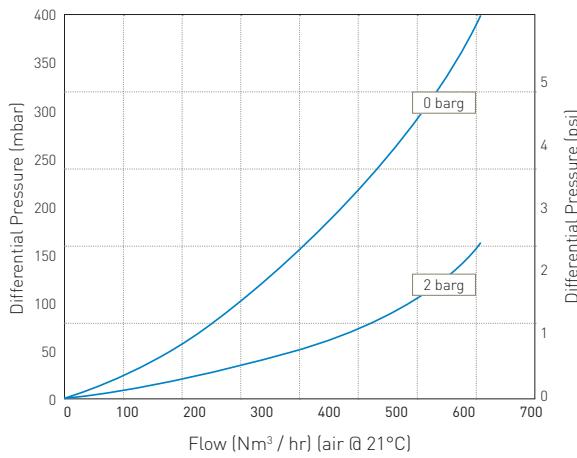

Filtration Stage

Particulate Removal

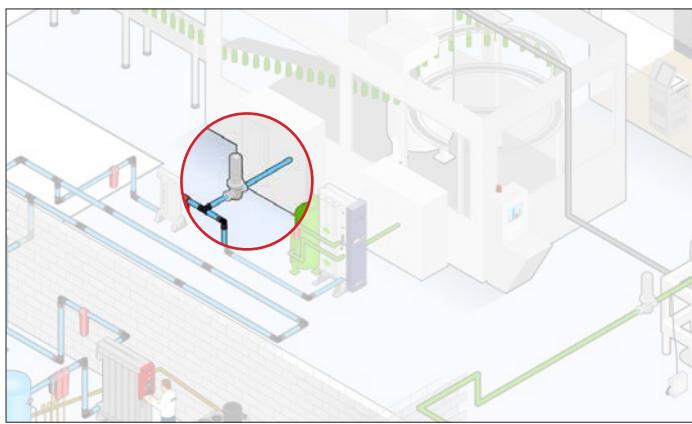



Specifications

Materials of Construction

Filtration Media:	Glass Microfibre
Upstream Support:	Polypropylene
Downstream Support:	Polypropylene
Inner Support Core:	316L Stainless Steel
Outer Protection Cage:	Polypropylene
End Caps:	Polypropylene
End Cap Insert:	Stainless Steel
Standard o-rings/gaskets:	Silicone

Food Contact Compliance

Parker dominick hunter's range of HIGH FLOW PREPOR GFA filters are intended for indirect food contact and as such are manufactured from materials suitable for the sterilization of compressed gasses within Food and Beverage applications. Materials conform to the relevant requirements of the United States FDA 21CFR part 177 and USP Plastics Class VI – 121°C .



Recommended Operating Conditions

The maximum differential pressure in direction of flow (outside to in) is 3.5 barg (50.76 psig) at 20 °C (68 °F).

The maximum recommended continuous operating temperature is 70 °C (158 °F).

Note: For temperatures from 70 °C (158 °F) to 100 °C (212 °F) a special product with polyester supports is available.

Effective Filtration Area (EFA)

10" (250 mm) 0.48 m² (5.16 ft²)

Ordering information

ZCHP



-



-



Code | O-rings

E	EPDM
S	Silicone
V	Viton®

Code | Variant*

S4*	High temperature
-----	------------------



PEPLYN AIR

Air & Gas

Filter Cartridges



Features

- Strong and durable polypropylene filtration media
- Graded density, pleated construction

PEPLYN AIR filter cartridges have been specifically designed to guarantee removal of particulate from gas streams.

They can be used to protect sterilizing grade filters in pressurized systems or in exhaust gas vent applications.

PEPLYN AIR is particularly suitable for:


- Inlet gas in the fermentation industry as protection to sterilizing grade filters where polypropylene media is preferred
- As protection to sterilizing grade filters in exhaust gas systems
- Vent applications
- Systems where high particulate loading is expected

PEPLYN AIR has the ability to be steam sterilized and has a broad range of chemical compatibility

Benefits


- Effective particle retention and steam sterilizable capability
- High flow rate and long service life

Performance Characteristics

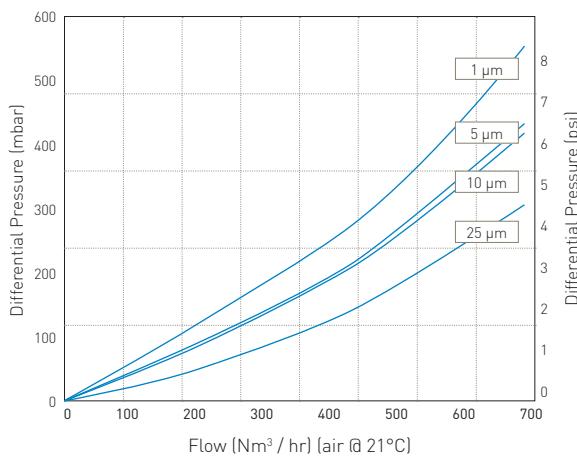

Filtration Stage

Particulate Removal

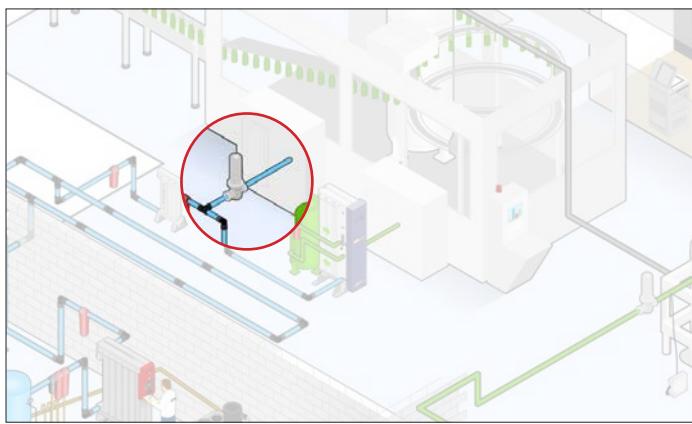



Specifications

Materials of Construction

Filtration Media:	Meltblown
	Polypropylene
Upstream Support:	Polypropylene
Downstream Support:	Polypropylene
Inner Support Core:	316L Stainless Steel
Outer Protection Cage:	Polypropylene
End Caps:	Polypropylene
Standard o-rings/gaskets:	Silicone

Food Contact Compliance

Parker dominick hunter's range of PEPLYN AIR filters are intended for indirect food contact and as such are manufactured from materials suitable for the sterilization of compressed gasses within Food and Beverage applications. Materials conform to the relevant requirements of the United States FDA 21CFR part 177 and USP Plastics Class VI - 121°C .



Recommended Operating Conditions

The maximum differential pressure in direction of flow (outside to in) is 3.5 barg (50.76 psig) at 20 °C (68 °F).

The maximum recommended continuous operating temperature is 50 °C (122 °F).

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.48 m² (5.16 ft²)



Cleaning and Sterilization

PEPLYN AIR cartridges can be repeatedly in situ steam sterilized or autoclaved up to 142 °C (287.6 °F).

Determination of Micron Ratings

Particle removal efficiencies of PEPLYN AIR cartridges have been determined independently by challenging with a cut silica test dust, generated by BUS1701 dust injector used in conjunction with laser particle counters.

Micron Efficiency Ratings

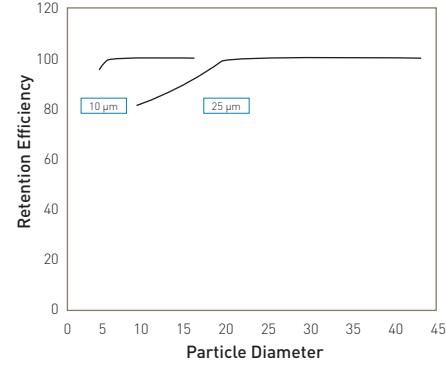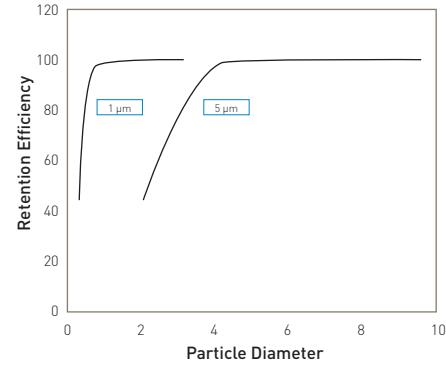

Ordering information

ZCPH



-



Code | Length (Nominal)

B*	2.5"	(65 mm)
A*	5"	(125 mm)
K	5"	(125 mm)
1	10"	(250 mm)
2	20"	(500 mm)
3	30"	(750 mm)

* Supplied in packs of 3

Code | Micron

1.0	1.0 μm
005	5.0 μm
010	10.0 μm

Code | End Cap (10 inch)

C	BF / 226 Bayonet
H	UF Retrofit

Code | End Cap (Demi)

T	TRUESEAL
Y	Demi Stub
Z	Demi A & B Std



Code | O-rings

E	EPDM
P	PTFE Encapsulated Silicone
S	Silicone
V	Viton®

* Silicone o-ring supplied as standard without having to specify the 'S' code

HBA
HOUSING RANGE
AVAILABLE



Valairdata 3
Integrity Test Unit



Instruments collection

There is a growing trend for higher quality and more consistent products manufactured by the food industry. In order to remain competitive, manufacturers must continually strive for better process control to eliminate hazards which could affect the quality and consistency of the foods they produce.

In order to help food manufacturers overcome the challenges of producing safe foods consistently without non-conformance or wastage, adoption of the principles outlined in the HACCP framework has become mandatory (ref: EU Regulation 852/2004). Routine integrity testing of critical filters offers a way of ensuring the on-going performance of critical filtration systems and ensures the food production plant operates in line with the HACCP principles.

Parker domnick hunter offer a range of automated integrity test instruments used to check the integrity of critical liquid or gas filters. The instruments satisfy the food industry requirements for filter testing by offering automated operation, accurate detection of filter integrity and easy documentation and management of test results.



Valairdata 3

Integrity Test Unit

Parker | **domnick**
hunter



Features


- 5.7" TFT LCD touch screen operation
- Multi-language menu availability
- Testing correlated to aerosol and viral challenges
- Developed to GAMP 5 guidelines
- Transfer of data via USB memory stick
- 4GB internal memory storage

Benefits

- Easy to use
- Portable for in-situ testing around the facility
- Quick determination of a filter's ability to sterilize gas - around 30 second test time for 10" housing, 5 seconds for discs
- Increased sensitivity compared to liquid based tests, especially on multi-cartridge systems
- No unit specific PC software required

Filtration Stage

Sterile Gas and Vent Filtration

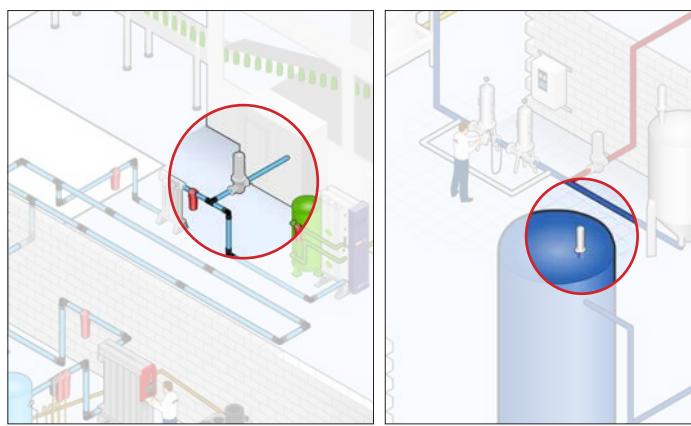



Specifications

Weight:	8 kg
Instrument size:	Width: 363 mm Height: 308 mm Depth: 155 mm
Electrical requirement:	Battery operated 3.2V / 16Ah & mains 100-240 VAC : 50/60 Hz
Laser:	Type: Solid state laser diode Power: 24 Volts DC Sample flow rate: 0.1cfm
Aerosol generator:	Aerosol generated from Purity™ FGW015 white mineral oil FDA:178-3620
CE standards:	LVD - EN61010-1-1 EMC - EN61326-1
Pneumatic requirements:	Input pressure: 4.5 to 7 barg clean dry air or nitrogen Pneumatic Rectus 21 KA connections
Packaging:	Waterproof and airtight solid case for transportation Padded carry bag for site portability
Languages:	English, German, French, Swedish, Italian, Portuguese, Danish and Spanish

Instrument Options

	WVA-3-ST Standard	WVA-3-SE Secure
Design environments approvals:	GAMP 5	GAMP 5
21CFR Part 11:	No	Yes (transferred data is user's responsibility)
Security user levels:	Operator Administrator	Operator - password protected Administrator - password protected
Audit trail:	No	Yes

Ordering information

WVA - 3	-	<input type="text"/>
		Code Length [Nominal]
ST		Standard
SE		Secure

Calibration code: 609500026

Customer Support

Parker dominick hunter can offer full after sales support worldwide, whether it is commissioning of the instrument, calibration / service or full training of site operators.





BEVCHECK & BEVCHECK PLUS

Integrity Test Units

Parker | **domnick**
hunter

Monitoring performance and product quality

Simple routine integrity testing for the beverage industry.

BEVCHECK

The BEVCHECK is an easy to use, portable unit that allows you to test the integrity of your membrane filters using the pressure decay method. Test data can be reported as pressure decay or diffusional flow.

BEVCHECK is a small hand held unit, or is light enough to be mounted directly on to a connection on the filter housing. Software included with the unit enables it to be connected to a PC for enhanced programming and data handling flexibility.

BEVCHECK PLUS

The BEVCHECK PLUS provides an automated method for testing membrane filter cartridges used in beverage applications. Using the pressure decay method, the unit controls the whole test from increase of pressure, through stabilization and pressure decay measurement, to release of pressure.

Test data can be reported as pressure decay or diffusional flow and is provided in a printed summary. The unit is small enough to be portable around the production facility, or can be positioned centrally for remote connection to the filter housings.





BEVCHECK & BEVCHECK PLUS

Integrity Test Units

- Large memory stores up to 19 programs and 100 test reports
- Flexible - suitable for use with compressed air or nitrogen
- Accommodates a wide range of filter retention ratings and housing sizes
- Clear liquid crystal display and wipe clean keypad
- Self test function automatically checks the function of the unit
- PC interface and software provides additional programming and data handling flexibility
- IP53 protection class
- Hand held portability with rechargeable battery operation
- Convenient built-in printer provides printed test report (PLUS)



Physical Parameters

Housing Material
Instrument Size
Weight
Ingress Protection Class
Power Supply
 Battery Life (From Full Charge)
Keyboard
Inlet Pressure Required
Operation Temperature
Pneumatic Connectors
 Storage Temperature
Ambient Humidity
Display
Printer
Language
Storable Test Programs
Storable Test Records
Test Pressure Control
Test Pressure Range
Housing Volume Range
Diffusional Flow Range
Stabilisation Time Range
Test Time Range
Interfaces
 Documentation / Ancillaries

BEVCHECK	BEVCHECK PLUS
ABS (WxDxH) 105 mm x 210 mm x 45 mm (4" x 8.25" x 1.75") 0.5 Kg (1.1 lbs) IP53 Re-Chargeable HiMH Battery (4.8 V / 1.5 Ah) & External Charger (100- 230V AC / 47 - 63 Hz / 7.5V 1.33A) 7 hours Typ. 16 Key - Polycarbonate Keypad 0 - 4000 mbar 3 - 33 °C (37.4 - 91.4 °F) Compressed Air / Filter : Rectus 21 Male 3 - 35 °C (37.4 - 95 °F) 5 - 95% Rel. LCD - 16 Character x 2 Lines None English, German, Italian, French, Spanish & Portuguese 19 100 Manual (Additional Accessory Kit Required) 0 - 4000 mbar 10 - 999999 ml 1 - 99.9 ml / min 1 - 1800 secs 1 - 1800 secs PC Data / Remote Operation : RS232 4-Pole Jack CE Declaration of Conformity Calibration Certificate Winfilter PC Software Power Supply / Charger with Country Specific Mains Adaptor PC Comms Cable (RS232 - 4 Pole Jack to 9 Pin Male) Installation, Operation & Maintenance Instructions (IOMI) Foam Lined Carry Case	Polystyrol (WxDxH) 315 mm x 280 mm x 150 mm (12.5" x 11" x 6") 3.9 Kg (8.6 lbs) IP53 HiMH Battery (4.8 V / 1.5 Ah) & External Charger / Mains (230V AC:18V DC, 1.7A / 230V AC:15V AC, 15VA) 2 hours Typ. 16 Key - Polycarbonate Keypad 0 - 4500 mbar 3 - 30 °C (37.4 - 95 °F) Compressed Air / Filter : Festo 4 mm Stäubli RBE03 Male Vent : Festo 4 mm 3 - 35 °C (37.4 - 86 °F) 5 - 95% Rel. LCD - 20 Character x 4 Lines Built in Thermal Printer - 57 mm Printer English, German, Italian, French, Spanish & Portuguese 19 100 Fully Automatic 0 - 3900 mbar 10 - 999999 ml 1 - 99.9 ml / min 1 - 1800 secs 1 - 1800 secs D-Sub 25 Pole PC Data / Remote Operation : RS232 9-Digit Male CE Declaration of Conformity Calibration Certificate Winfilter PC Software Power Supply / Charger with Country Specific Mains Adaptor PC Comms Cable (RS232 - 4 Pole Jack to 9 Pin Male) Installation, Operation & Maintenance Instructions (IOMI) Foam Lined Carry Case

Ordering Information

Model	BEVCHECK	BEVCHECK PLUS
Calibration order code	WBC-230 609500028	WBC-BEVCHECK PLUS 609500091

Parker domnick hunter has a continuous policy of product development and although the Company reserves the right to change specifications, it attempts to keep customers informed of any alterations. This publication is for general information only and customers are requested to contact our Process Filtration Sales Department for detailed information and advice on a products suitability for specific applications. All products are sold subject to the company's standard conditions of sale.

DS_FBG_IT_03_01/14 Rev. 1B



Wolker | domnick
hunter





Housings collection

Selecting the correct filter housing for an application is as important as selecting the correct filter. Parker domnick hunter offer a range of housings for the filtration of both liquids and gases to meet the stringent requirements of food and beverage applications.

From single demi-housings for point-of-use gas flows, to multi-round liquid housings for final filtration of your product, we can supply housings in a wide range of connection sizes and finishes to meet any flow rate or application requirements.

- Liquid prefiltration
- Liquid final filtration
- Gas filtration
- Vent filtration
- Steam filtration

Focussed on meeting specifications and legislations relevant to the food and beverage industries, our housings are manufactured from 316L stainless steel for all product contact surfaces, and are designed to achieve optimal flow and lowest differential pressure for maximum efficiency.

www.parker.com/dhb beverage



HIL Filter Housings

Industrial Liquid



- Industrial liquid housing for prefiltration and clarification duties
- STANDARD product
 - BSP (G) or NPT connections and standard finish
- PLUS product
 - Available in 3 different vessel classes:
Standard (CE), Atex and High Pressure
 - Standard and electropolished surface finishes available
 - A number of inlet / outlet port connections
 - Choice of BSP (G) / ISO 228, NPT or no vent
 - Choice of BSP (G) / ISO 228 or NPT drain
 - Option of C (226) location and fabricated (not cast) head

Specification

STANDARD Range

Materials of Construction

- Housing: Cast Head - Stainless Steel
Bowl - 316L - Stainless Steel
- Seals: EPDM FDA
- Clamps: 304 Stainless Steel

Surface Finish

- Internal: As Welded
- External: Polished 0.8 µm Ra (32 µin Ra)

All finished pickled and passivated

PLUS Range

Materials of Construction

- Housing: Cast Head - 316L Stainless Steel
Bowl - 316L - Stainless Steel
- Seals: EPDM FDA
PTFE FDA
Silicone FDA
Viton® / FKM FDA
- Clamps: 304 Stainless Steel

Welding

All assembly welds are full penetration.
All welds are crevice and undercut free.
Weld finish and detail drawings available upon request.

Certification

Supplied as standard with vessel inspection certificate.

Material Test Certification

EN10204 3.1 supplied upon request.

Design Code

Housings designed in accordance with the European Council Pressure Equipment Directive (PED) 97/23/EC and the UK statutory Pressure Equipment Regulations (PER) 1999 N° 2001.

Design Basis

ASME VIII Division 1.

Surface Finish

Two Finishes Available

- Standard Finish
 - Head-Cast, Pickled and Passivated
 - Bowl Internal: As Welded
 - Pickled and Passivated
 - Bowl External: Polished 0.8 µm Ra (32 µin Ra)
- Standard Electropolished Finish
 - Head-Cast, Electropolished
 - Bowl Internal: Electropolished
 - Bowl External: Polished 0.8 µm Ra (32 µin Ra)

All finished pickled and passivated



STANDARD Range

Working Condition PED 97/23/EC			Maximum Pressure			
Fluid Group	State	Temperature	011	012	013	
Non Dangerous	Liquid / Gas	150 °C [302 °F]	10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)	
	Liquid / Gas	150 °C [302 °F]	5 barg (73 psig)	5 barg (73 psig)	5 barg (73 psig)	
PED Conformity Assessment Category			SEP	CAT I	CAT I	
Volume (litres)			3.2	5.1	7.0	

PLUS Range

CE Working Condition PED 97/23/EC			Maximum Pressure			
Fluid Group	State	Temperature	011	012	013	014
Non Dangerous	Gas / Vapour	150 °C [302 °F]	10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)
	Gas / Vapour	150 °C [302 °F]	5 barg (73 psig)	5 barg (73 psig)	5 barg (73 psig)	5 barg (73 psig)
Non Dangerous	Liquid	150 °C [302 °F]	10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)
	Liquid	150 °C [302 °F]	5 barg (73 psig)	5 barg (73 psig)	5 barg (73 psig)	5 barg (73 psig)
PED Conformity Assessment Category			Code B & D Code C	SEP SEP	CAT I SEP	CAT I CAT I
Volume (litres)			Code B & D Code C	3.2 2.9	5.1 4.8	7.0 6.7

ATEX Working Condition PED 97/23/EC			Maximum Pressure			
Fluid Group	State	Temperature	011	012	013	014
Non Dangerous	Gas / Vapour	135 °C [275 °F]	10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)
	Gas / Vapour	135 °C [275 °F]	5 barg (73 psig)	5 barg (73 psig)	5 barg (73 psig)	5 barg (73 psig)
Non Dangerous	Liquid	135 °C [275 °F]	10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)
	Liquid	135 °C [275 °F]	5 barg (73 psig)	5 barg (73 psig)	5 barg (73 psig)	5 barg (73 psig)
PED Conformity Assessment Category			Code B & D Code C	SEP SEP	CAT I SEP	CAT I CAT I
Volume (litres)			Code B & D Code C	3.2 2.9	5.1 4.8	7.0 6.7

High Pressure Working Condition PED 97/23/EC			Maximum Pressure			
Fluid Group	State	Temperature	011	012	013	014
Non Dangerous	Gas / Vapour / Liquid	205 °C [401 °F]	16 barg (232 psig)	16 barg (232 psig)	16 barg (232 psig)	16 barg (232 psig)
PED Conformity Assessment Category			Code B & D Code C	CAT I 2.9	CAT I 4.8	CAT I 6.7
Volume (litres)			Code B & D Code C	3.2 SEP	5.1 CAT I	7.0 CAT I

Note: All housings are full vacuum rated.



HIL Filter Housings



Industrial Liquid

Parker | **domnick**
hunter

Physical Characteristics

Bowl Height	Dimensions (mm)			Bowl	Typical Weight	Head	Total
	'A'	'B'	'C'				
250 mm [10"]	150 mm [5.9"]	441 mm [17.4"]	297 mm [11.7"]		1.5 Kg [3.3 lbs]	1.2 Kg [2.6 lbs]	3.8 Kg [8.4 lbs]
500 mm [20"]	150 mm [5.9"]	691 mm [27.2"]	550 mm [21.7"]		2.5 Kg [5.5 lbs]	1.2 Kg [2.6 lbs]	4.9 Kg [10.8 lbs]
750 mm [30"]	150 mm [5.9"]	936 mm [26.9"]	814 mm [32.0"]		3.5 Kg [7.7 lbs]	1.2 Kg [2.6 lbs]	6.0 Kg [13.2 lbs]

Dimensions shown are based on the STANDARD range. For accurate dimensions, please contact Parker domnick hunter.

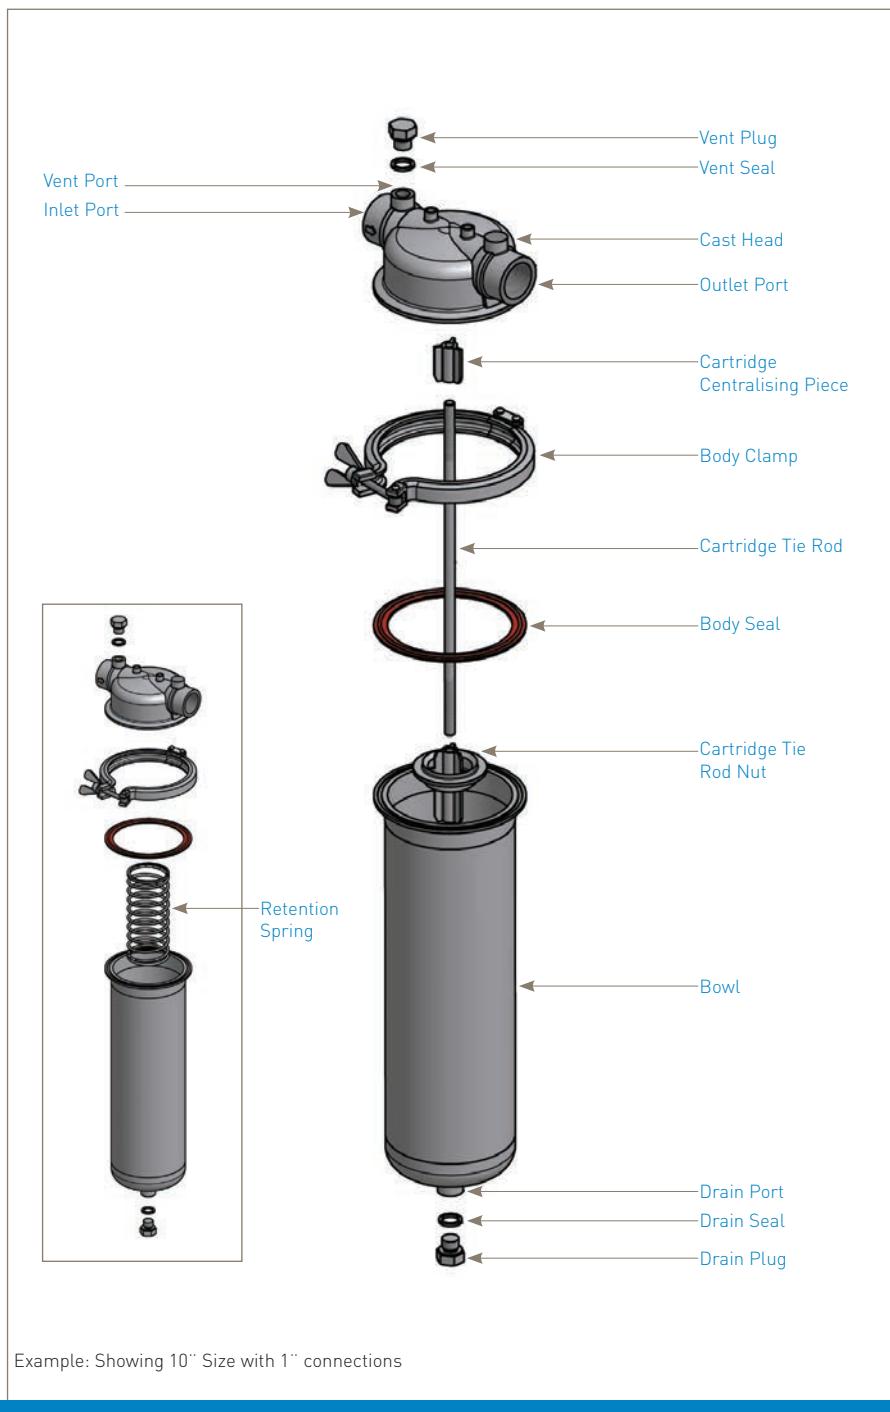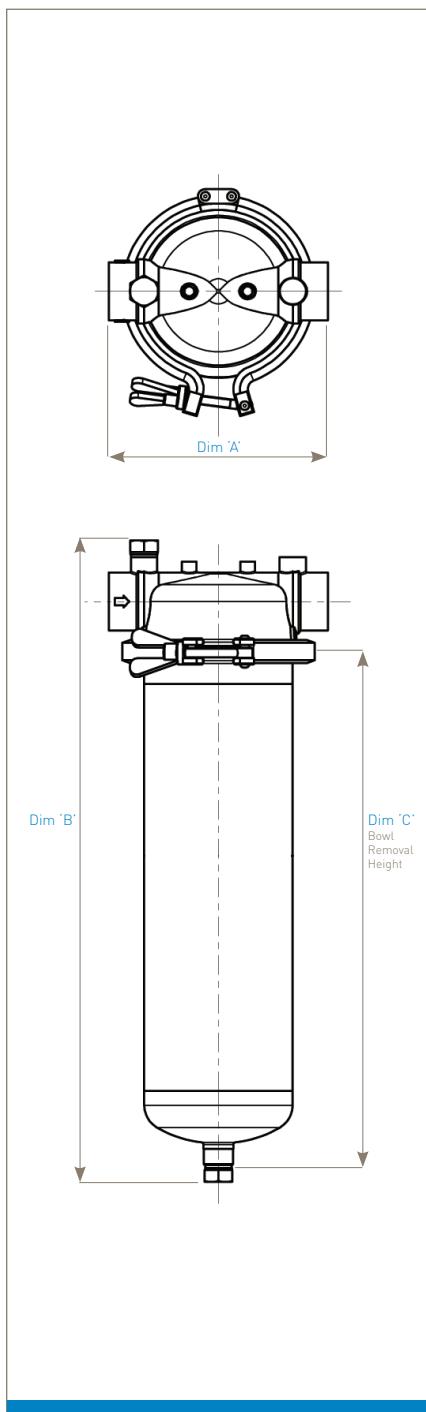


Example: Showing 10" Size with 1" connections

The PLUS product range is available with many options of connections, vents, drains, surface finish, seals classification, etc. Please see product coding.





STANDARD Range - 10° to 30°



Code Vessel Class	Code Length (Nominal)	Code Connection Size	Code Standard	Code Cartridge	Code Seal
CE Standard	1 10" (250 mm) 2 20" (500 mm) 3 30" (750 mm)	B 1" (25.4 mm)	B BSPP (G) / ISO 228 N NPT	B DOE D 222	E EPDM

PLUS Range - 10" to 40"

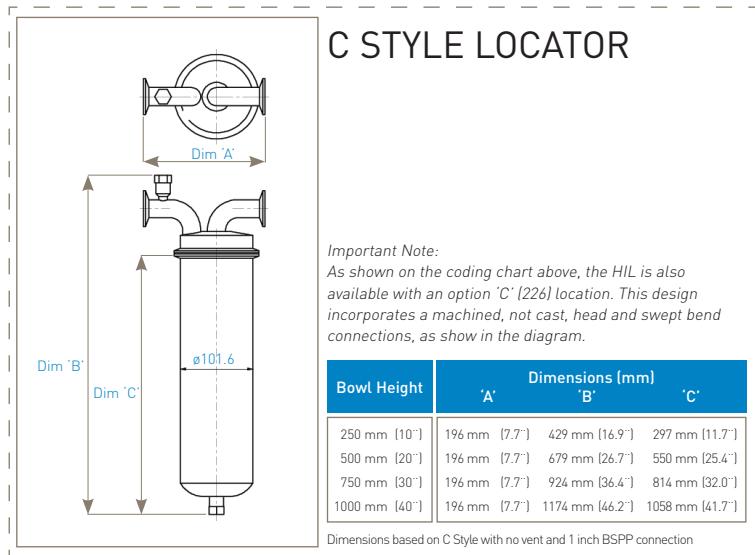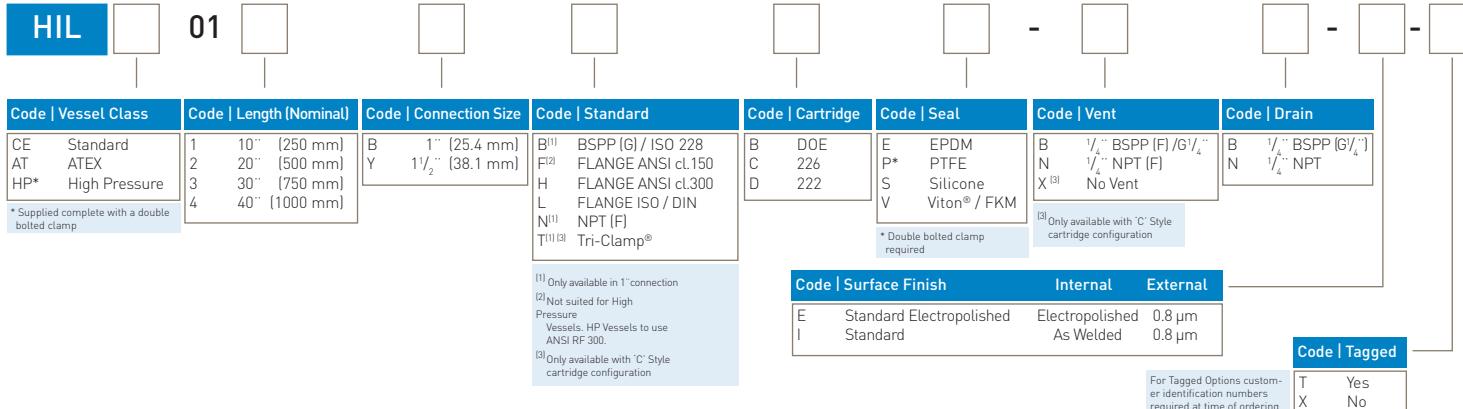

Tri-Clamp® is a trademark of Alfa-Laval, Inc.

Viton® is a registered trademark of DuPont Performance Elastomers L.L.C..

DS_FBH_01_01/14 Rev. 1B



HIL Multi Filter Housings

Industrial Liquid



- Flow efficient range of multi element industrial liquid housings
- Designed specifically for prefiltration and clarification applications
- Available with a number of inlet/outlet port connections
- Standard and electropolished surface finishes
- Suitable for cartridge types:
 - DOE or 222 (10" to 40")
- Option for ATEX compliance directive 94/9/EC

Specification

STANDARD Range

Materials of Construction

Housing:	316L Stainless Steel
Seals:	EPDM FDA
	Silicone FDA
	Viton® / FKM FDA
Clamps:	304 Stainless Steel

Two Finishes Available

Standard Finish 'I'	Internal: As Welded
	Pickled and Passivated
	External: Polished 0.8 µm Ra (32 µin Ra)
Electropolished Finish 'E'	Internal: As Welded
	Electropolished
	External: Electropolished 0.8 µm Ra (32 µin Ra)

Welding

All assembly welds are full penetration.

All welds are crevice and undercut free.

Weld finish and detail drawings available upon request.

Certification

Supplied as standard with vessel inspection certificate and EC Declaration of conformity.

Material Test Certification

EN10204 3.1/2.2 supplied upon request.

Design Code

Housings designed in accordance with the European Council Pressure Equipment Directive (PED) 97/23/EC and the UK statutory Pressure Equipment Regulations (PER) 1999 N° 2001.

Design Basis

ASME VIII Division 1.

CE	Working Condition PED 97/23/EC		Maximum Pressure +FV		
	Fluid Group	State	Temperature	3 Round	5/7 Round
Non Dangerous	Liquid	-10 °C (14 °F) to 150 °C (302 °F)	10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)
Non Dangerous	Gas		8 barg (116 psig)	4 barg (58 psig)	3 barg (44 psig)
PED Conformity Assessment Category			CAT I	CAT I	CAT I


ATEX	Working Condition PED 97/23/EC		Maximum Pressure +FV		
	Fluid Group	State	Temperature	3 Round	5/7 Round
Non Dangerous	Liquid	-10 °C (14 °F) to 135 °C (275 °F)	10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)
Non Dangerous	Gas		8 barg (116 psig)	4 barg (58 psig)	3 barg (44 psig)
PED Conformity Assessment Category			CAT I	CAT I	CAT I

Note: All housings are full vacuum rated.



HIL Multi Filter Housings

Industrial Liquid

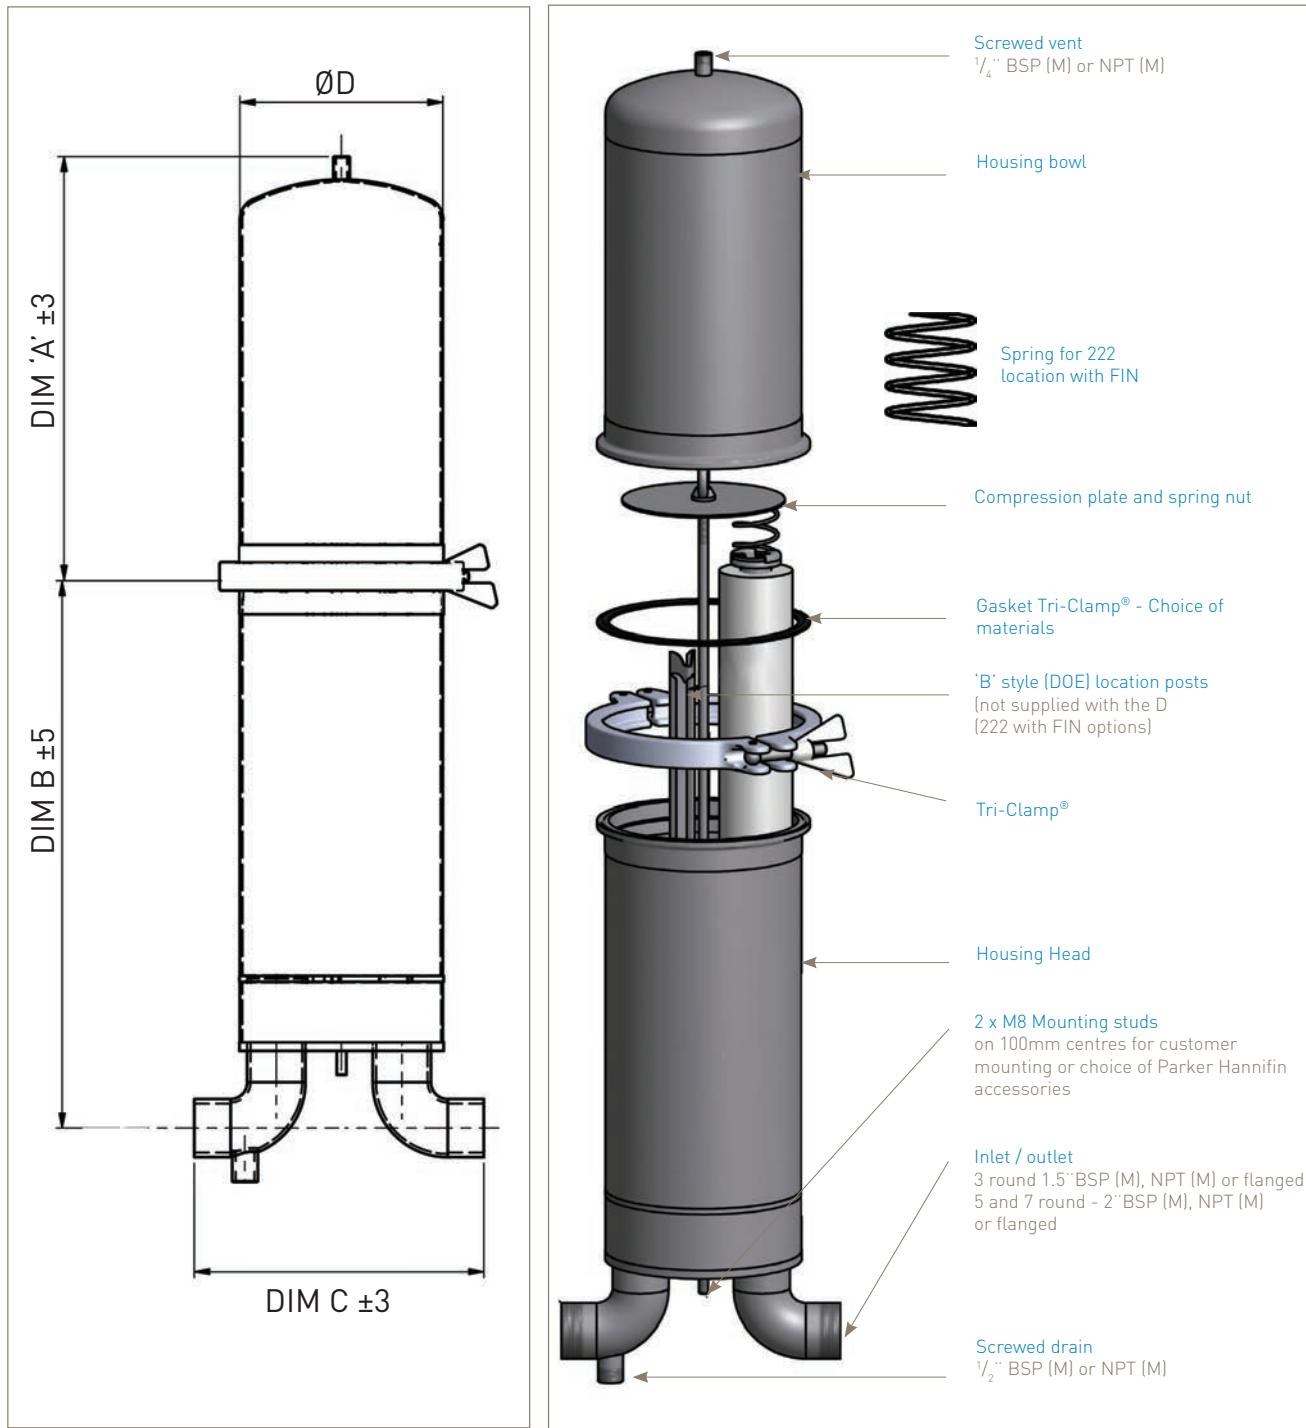

	Dimensions						Approximate weight and volume		
	A'	B'	C'			'D'	BOWL	TOTAL (Threaded version only)	VOLUME
			BSP (M)	NPT (M)	FLANGED				
3 ROUND	10" 20" 30" 40"	101 mm (4.0 in) 348 mm (13.7 in) 598 mm (23.5 in) 848 mm (33.4 in)	455 mm (17.9 in)	230 mm (9 in) 230 mm (9 in)	294 mm (11.6 in) 294 mm (11.6 in)	168 mm (6.6 in)	2.0 kg (4.4 lbs) 4.0 kg (8.8 lbs) 6.0 kg (13.2 lbs) 8.0 kg (17.6 lbs)	8.9 kg (21.0 lbs) 11.0 kg (24.0 lbs) 13.1 kg (29.9 lbs) 15.2 kg (33.5 lbs)	10.4 L (2.75 USg) 15.7 L (4.15 USg) 21.0 L (5.5 USg) 26.3 L (6.8 USg)
5 & 7 ROUND	10" 20" 30" 40"	109 mm (4.3 in) 360 mm (14.2 in) 610 mm (24.0 in) 860 mm (33.4 in)	468 mm (17.7 in)	296 mm (11.7 in) 296 mm (11.7 in)	347 mm (13.7 in) 347 mm (13.7 in)	219 mm (8.6 in)	1.6 kg (3.5 lbs) 4.4 kg (9.7 lbs) 7.1 kg (15.6 lbs) 9.8 kg (21.6 lbs)	12.9 kg (28.0 lbs) 15.7 kg (35.0 lbs) 18.4 kg (41.0 lbs) 21.1 kg (46.5 lbs)	18.0 L (4.6 USg) 27.0 L (7.0 USg) 36.0 L (9.3 USg) 45.0 L (11.7 USg)


Refer to coding structure for configuration options.



HIL Multi Filter Housings

Industrial Liquid

Parker | **domnick**
hunter

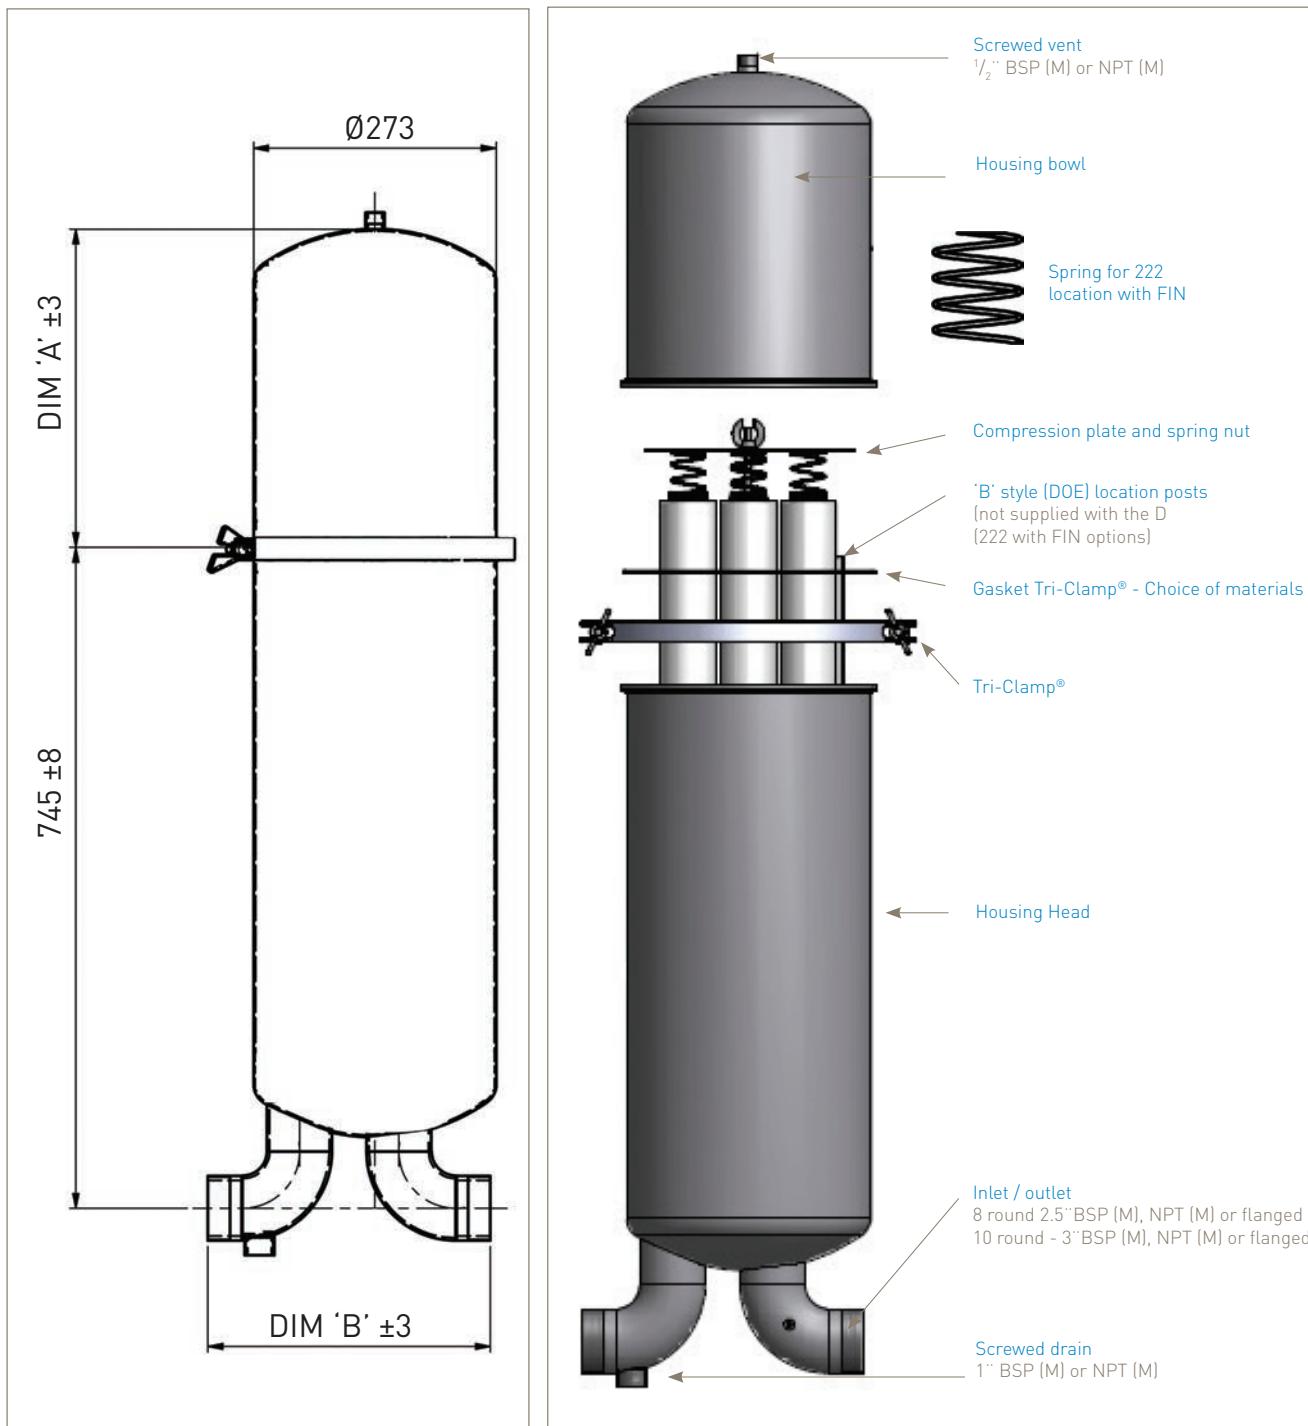


	Dimensions					Approximate weight and volume		
	A'		B'			BOWL	TOTAL (Threaded version only)	VOLUME
		BSP (M)	NPT (M)	FLANGED				
8 ROUND	20° 30° 40°	107 mm (4.2 in) 357 mm (14 in) 607 mm (24 in)	316 mm (12.4 in)	332 mm (13.1 in)	356 mm (14 in)	2.2 kg (5.0 lbs) 5.7 kg (12.5 lbs) 9.0 kg (20 lbs)	20.0 kg (44.0 lbs) 23.5 kg (52.0 lbs) 27.0 kg (60.0 lbs)	42.0 L (11.1 USg) 56.0 L (14.8 USg) 69.0 L (18.2 USg)
10 ROUND	20° 30° 40°	107 mm (4.2 in) 357 mm (14 in) 607 mm (24.0 in)	410 mm (16.1 in)	410 mm (16.1 in)	382 mm (15 in)	2.2 kg (5.0 lbs) 5.6 kg (12.3 lbs) 9.0 kg (20 lbs)	22.2 kg (49.0 lbs) 25.6 kg (56.4 lbs) 29.0 kg (63.9 lbs)	45.0 L (11.9 USg) 59.3 L (15.7 USg) 73.5 L (19.4 USg)

Refer to coding structure for configuration options.




Product coding

Connection	Code	Max Flow	
HIL **03	1.5° Connections	Y	175 L/min 45 USg/min
HIL **05 /07	2° Connections	C	280 L/min 72 USg/min
HIL **08	2.5° Connections	X	420 L/min 109 USg/min
HIL **10	3° Connections	D	650 L/min 168 USg/min

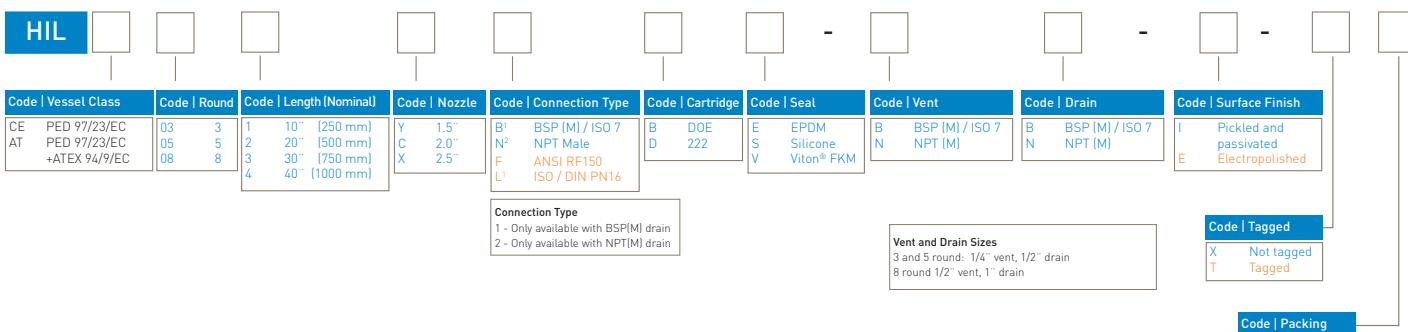

Only 62 and 64 mm diameter cartridges can be used in the 7 and 10 round housings.

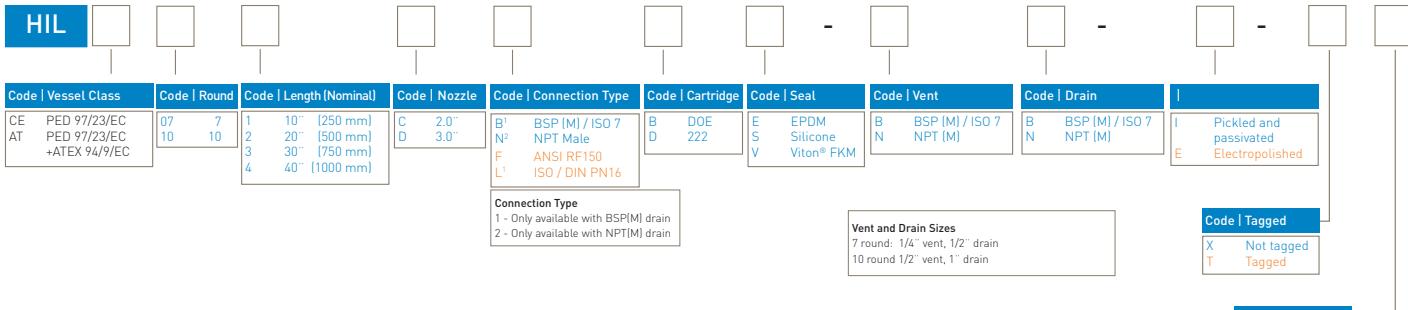

Notes:

3, 5 and 7 Round housings available for use with 10" to 40" cartridges
8 and 10 Round housings available for use with 20" to 40" cartridges

Delivery schedules (excluding shipping)

Blue Options - 2-3 working weeks

Orange Options - 4-5 working weeks

Tri-Clamp® is a trademark of Alfa-Laval, Inc.

Viton® is a registered trademark of DuPont Performance Elastomers L.L.C.



HIL Multi Filter Housings

Industrial Liquid

Parker | **domnick**
hunter

Accessories

Adjustable legs.

Accessory Kit

3 round

639504203 (XLGSS12IL1)


5 and 7 round

639504204 (XLGSS12IL2)

8 and 10 round

639504205 (XLGSS13IL1)

Adjustable legs giving centre to floor height adjustment between 50 and 375 mm for 3,5 and 7 round and 50-300 mm for 8 and 10 round. (clearance required for drain)

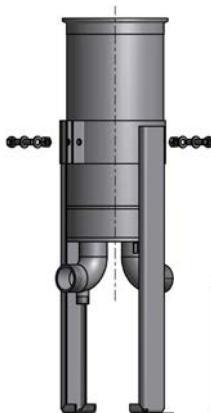


Fixed legs.

Accessory Kit

3, 5 and 7 round only


639504206 (XLGSS12IL3)

Fixed base support for M8 mounting studs giving centre to floor height of 230 mm. Vessel to be properly supported on the pipework as close as possible to the inlet/outlet.



Customer mounting, 3, 5 & 7 round only.

Two M8 mounting studs are provided as shown to allow the customer to custom mount the housing as they require, alternatively we provide accessories shown.

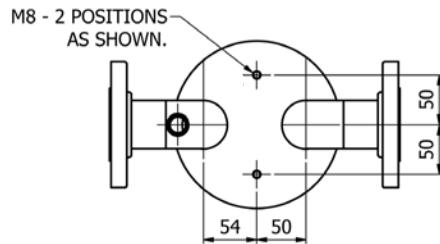




Note A

Gap available for 50 mm (2 in) wide support.

Wall mounting, 3, 5 & 7 round only.

Accessory Kit - 639504207 (XMBSS12IL1)

Wall mounting bracket. Customer to ensure wall strength and if necessary provide a backing plate.



HIL Pressure Gauge

Type	Connection	Pressure	Ordering Code
All stainless steel wetted parts with glycerine fill fluid (includes adapter for assembly to housing. Also includes adaptor for connecting vent valve (1/4" BSP[F] / 1/4" NPT [F])	1/4" / 1/2" BSP	0 - 10 barg	639504201 (XPGSS03BS01)
	1/4" / 1/2" NPT	0 - 10 barg	639504202 (XPGSS03NP01)



Industrial 1 Piece Ball Valve

Type	Connection	Ordering Code
316 stainless steel 1 piece ball valve with PTFE ball. Female / female.	1/4" BSP	639502594 (XVASS03BS1)
	1/4" NPT	639504220 (XVASS03NP1)
	1/2" BSP	639502595 (XVASS04BS1)
	1/2" NPT	639504221 (XVASS04NP2)
	1" BSP	639504218 (XVASS05BS3)
	1" NPT	639504219 (XVASS05NP1)







HSL Filter Housings

Sanitary Liquid

Parker | **domnick**
hunter



- Single element sanitary liquid housing
- Designed specifically for the food & beverage and pharmaceutical industries
- Sanitary tri-clamp body closure as standard
- STANDARD product
 - Sanitary surface finish
 - Tri-clamp connections
- PLUS product
 - Available in 3 different vessel classes:
Standard (CE), Atex and High Pressure
 - Sanitary or sanitary electropolished surface finish options
 - Wide range of vent and drain connections
 - Choice of gasket and seal materials

Specification

STANDARD Range

Materials of Construction

Housing:	316L Stainless Steel
Seals:	Silicone FDA
Clamps:	304 Stainless Steel

Surface Finish

Internal:	Polished 0.4 µm Ra (16 µin Ra)
External:	Polished 0.25 µm Ra (10 µin Ra)

All finishes pickled & passivated.

PLUS Range

Materials of Construction

Housing:	316L Stainless Steel
Seals:	EPDM FDA
	PTFE FDA
	Silicone FDA
	Viton® / FKM FDA
Clamps:	304 Stainless Steel

Surface Finish

Sanitary Finish	
Internal:	Polished 0.4 µm Ra (16 µin Ra)
External:	Polished 0.25 µm Ra (10 µin Ra)

Sanitary Electropolished Finish

Internal:	Electropolished 0.4 µm Ra (16 µin Ra)
	and Electropolished
External:	Polished 0.25 µm Ra (10 µin Ra)

Welding

All assembly welds are full penetration.
All welds are crevice and undercut free.
Weld finish & detail drawings available upon request.

Certification

Supplied as standard with vessel inspection certificate.

Material Test Certification

EN10204 3.1 supplied upon request.

Design Code

Housings designed in accordance with the European Council Pressure Equipment Directive (PED) 97/23/EC and the UK statutory Pressure Equipment Regulations (PER) 1999 N° 2001.

Design Basis

ASME VIII Division 1.



Standard Range

Working Condition PED 97/23/EC			Maximum Pressure					
Fluid Group	State	Temperature	01A	01B	011	012	013	
Non Dangerous	Liquid / Gas	150 °C (302 °F)	10 barg (145 psig)					
Dangerous	Liquid / Gas	150 °C (302 °F)	10 barg (145 psig)	10 barg (145 psig)	5 barg (72.5 psig)	5 barg (72.5 psig)	5 barg (72.5 psig)	
PED Conformity Assessment Category			SEP	SEP	SEP	SEP	CAT I	
Volume (litres)			0.75	0.5	2.9	4.8	6.7	

Plus Range

CE Working Condition PED 97/23/EC			Maximum Pressure						
Fluid Group	State	Temperature	01A	01B	01K	011	012	013	014
Non Dangerous	Gas / Vapour	150 °C (302 °F)	10 barg (145 psig)						
Dangerous	Gas / Vapour	150 °C (302 °F)	10 barg (145 psig)	10 barg (145 psig)	5 barg (72.5 psig)				
Non Dangerous	Liquid	150 °C (302 °F)	10 barg (145 psig)						
Dangerous	Liquid	150 °C (302 °F)	10 barg (145 psig)	10 barg (145 psig)	5 barg (72.5 psig)				
PED Conformity Assessment Category			SEP	SEP	SEP	SEP	SEP	CAT I	CAT I
Volume (litres)			0.75	0.5	1.7	2.9	4.8	6.7	8.6

ATEX Working Condition PED 97/23/EC			Maximum Pressure						
Fluid Group	State	Temperature	01A	01B	01K	011	012	013	014
Non Dangerous	Gas / Vapour	135 °C (275 °F)	10 barg (145 psig)						
Dangerous	Gas / Vapour	135 °C (275 °F)	10 barg (145 psig)	10 barg (145 psig)	5 barg (72.5 psig)				
Non Dangerous	Liquid	135 °C (275 °F)	10 barg (145 psig)						
Dangerous	Liquid	135 °C (275 °F)	10 barg (145 psig)	10 barg (145 psig)	5 barg (72.5 psig)				
PED Conformity Assessment Category			SEP	SEP	SEP	SEP	SEP	CAT I	CAT I
Volume (litres)			0.75	0.5	1.7	2.9	4.8	6.7	8.6

High Pressure Working Condition PED 97/23/EC			Maximum Pressure						
Fluid Group	State	Temperature	01A	01B	01K	011	012	013	014
Non Dangerous	Gas / Vapour / Liquid	205 °C (401 °F)	16 barg (232 psig)						
PED Conformity Assessment Category			SEP	SEP	SEP	SEP	CAT I	CAT I	CAT I
Volume (litres)			0.75	0.5	1.7	2.9	4.8	6.7	8.6

Note: All housings are full vacuum rated.



HSL Filter Housings


Sanitary Liquid

Parker | **domnick**
hunter

Physical Characteristics

Bowl Height	Dimensions (mm)			Typical Weight
	'A'	'B'	'C'	
A Size 125 mm [5"]	117 mm [4.6"]	191 mm [7.5"]	130 mm [5.1"]	2.0 Kg [4.4lbs]
B Size 65 mm [2 1/2"]	117 mm [4.6"]	136 mm [5.4"]	70 mm [2.8"]	1.8 Kg [3.9lbs]
250 mm [10"]	156 mm [6.1"]	417 mm [16.4"]	313 mm [12.3"]	3.8 Kg [8.3 lbs]
500 mm [20"]	156 mm [6.1"]	667 mm [26.3"]	561 mm [22.1"]	4.8 Kg [10.5 lbs]
750 mm [30"]	156 mm [6.1"]	912 mm [35.9"]	809 mm [31.8"]	5.7 Kg [12.5 lbs]
1000 mm [40"]	156 mm [6.1"]	1160 mm [45.7"]	1057 mm [41.6"]	6.7 Kg [14.7 lbs]


Dimensions shown are based on the STANDARD range. For accurate dimensions, please contact Parker domnick hunter.

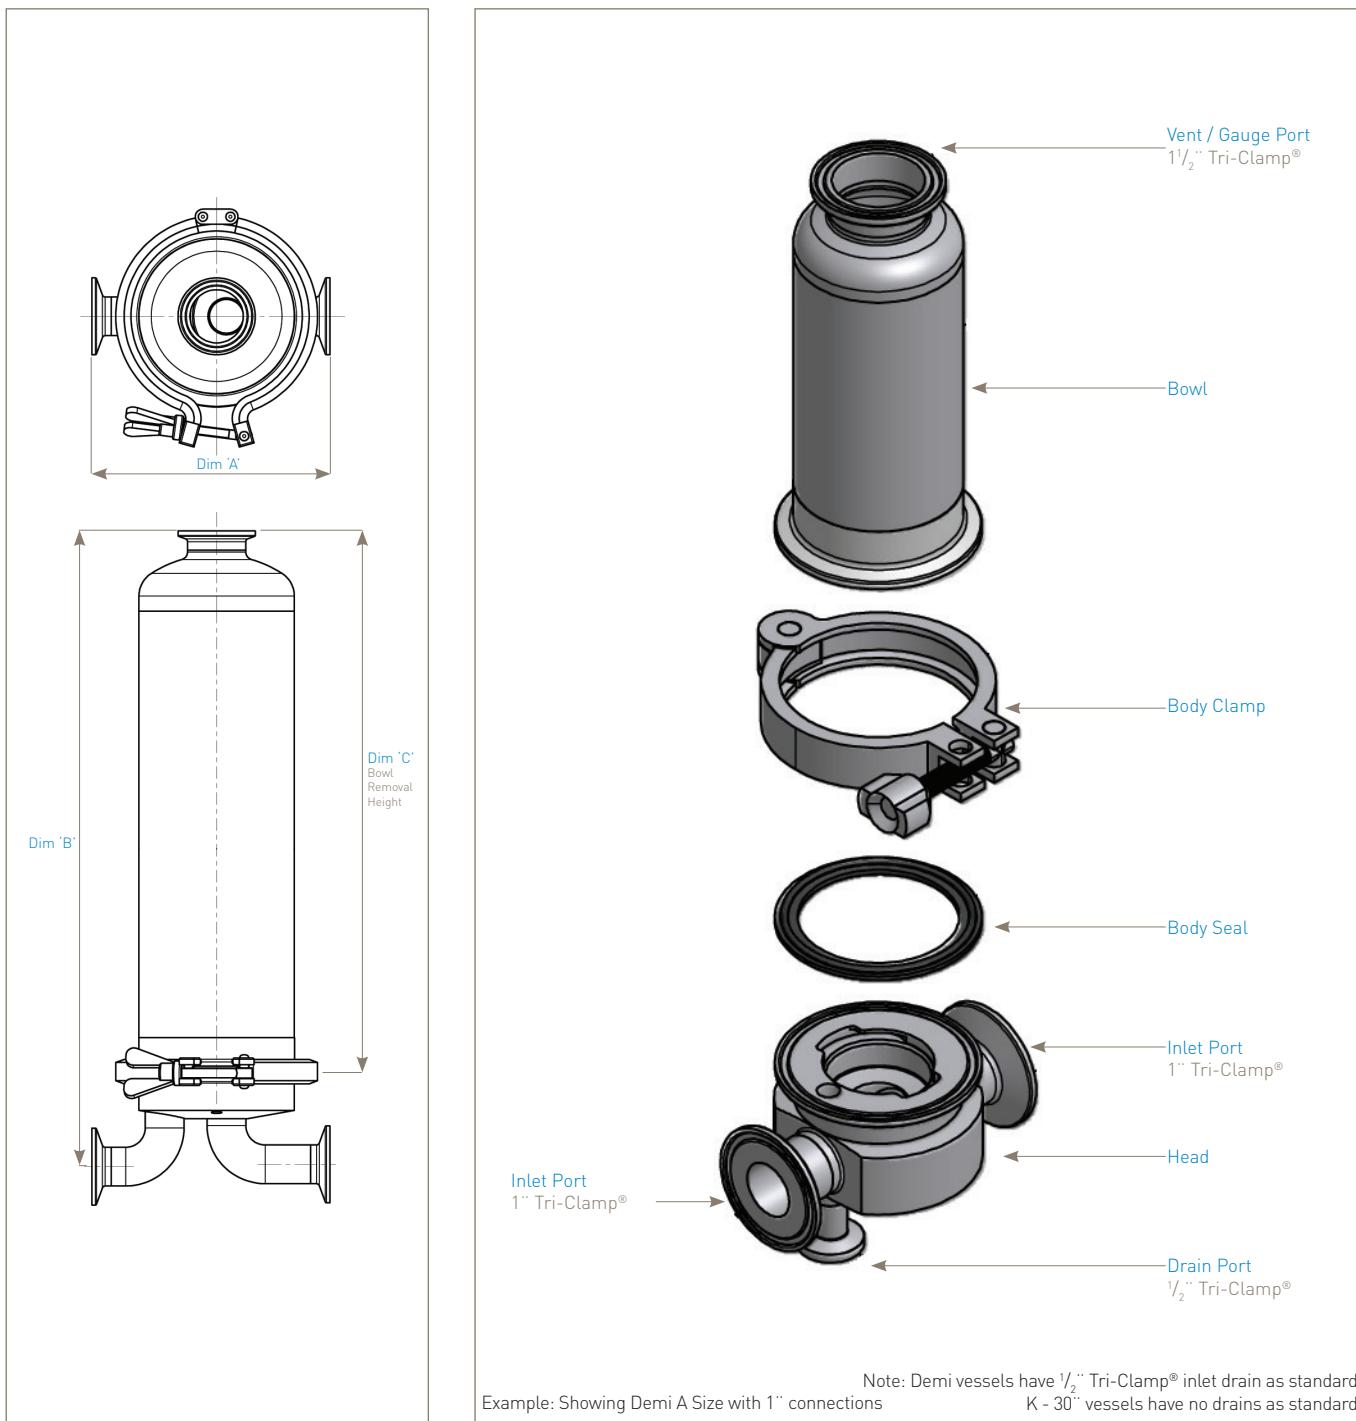

The PLUS product range is available with many options of connections, vents, drains, surface finish, seals classification, etc. Please see product coding.




STANDARD Range - 10" to 30"



Code Vessel Class	Code Length (Nominal)	Code Connection Size	Code Standard	Code Cartridge	Code Seal
CE Standard	1 10" (250 mm)	B 1" (25.4 mm)	T Tri-Clamp®	C 226	S Silicone
2 20" (500 mm)					
3 30" (750 mm)					

Note: No drain(s) as standard.

STANDARD Range - Demi A & B



Code Vessel Class	Code Length (Nominal)	Code Connection Size	Code Standard	Code Cartridge	Code Seal
CE Standard	A 5" (125 mm)	B 1"	T Tri-Clamp®	T 126	S Silicone
	B 2½" (65 mm)				

Note: 1½" Tri-Clamp® inlet drain as standard.

PLUS Range - K to 40"

Code Vessel Class	Code Length (Nominal)	Code Connection Size	Code Standard	Code Cartridge	Code Seal	Code Vent	Code Drain
CE Standard	K 5" (125 mm)	B 1" (25.4 mm)	D DIN11851(M)	C 226	E EPDM	A 1½" Tri-Clamp® & 2 x Rectus 21	H Hosebarb Inlet Only
AT ATEX	1 10" (250 mm)		F ⁽¹⁾ ⁽²⁾ ANSI RF 150		P* PTFE	B 1½" Tri-Clamp® & 2 x Stäubli™ RBE03	R Rectus 21 Inlet Only
HP* High Pressure	2 20" (500 mm)		H ⁽²⁾ ANSI RF 300		S Silicone	H 1½" Tri-Clamp® & Hosebarb	S Stäubli™ RBE03 Inlet Only
	3 30" (750 mm)		L ⁽²⁾ FLANGE ISO / DIN		V Viton® / FKM	I 1½" Tri-Clamp® & Stäubli™ RBE03	X No Drain
	4 40" (1000 mm)		R RJT(M)		* Double bolted clamp required	M 1½" Tri-Clamp® & 1½" Tri-Clamp®	Y 1" Tri-Clamp® Inlet Only
* Supplied complete with a double bolted clamp		S SMS Union (M)	T Tri-Clamp®			R 1½" Tri-Clamp® & Rectus 21	Z 1" TCF Inlet & Outlet
		W Butt Weld				S Stäubli™ RBE03 Vertical	
		BS4825 Pt.1				T 1½" Tri-Clamp® Only	
<small>(1) Not suited for High Pressure Vessels. HP Vessels to use ANSI RF 300.</small>							
<small>(2) Flanged vessels based on 1" O.D. pipe but use 1½" or NW20 flanges.</small>							
Code Surface Finish		Internal	External	Code Tagged			
B Sanitary		0.4 µm	0.25 µm	T Yes			
P Sanitary Electropolished		0.4 µm EP	0.25 µm	X No			
<small>For Tagged Options customer identification numbers required at time of ordering</small>							

PLUS Range - Demi A & B

Code Vessel Class	Code Length (Nominal)	Code Connection Size	Code Standard	Code Cartridge	Code Seal	Code Vent	Code Drain
CE Standard	A 5" (125 mm)	B 1"	D DIN11851	T 126	E EPDM	A 1½" Tri-Clamp® & 2 x Rectus 21	H Hosebarb Inlet Only
AT ATEX	B 2½" (65 mm)		F ⁽¹⁾ ⁽²⁾ ANSI RF 150		P* PTFE	B 1½" Tri-Clamp® & 2 x Stäubli™ RBE03	R Rectus 21 Inlet Only
HP High Pressure			H ⁽²⁾ ANSI RF 300		S Silicone	H 1½" Tri-Clamp® & Hosebarb	S Stäubli™ RBE03 Inlet Only
			L FLANGE ISO / DIN		V Viton® / FKM	I 1½" Tri-Clamp® & Stäubli™ RBE03	X No Drain
			R RJT		* Double bolted clamp required	M 1½" Tri-Clamp® & 1½" TCF	T 1½" Tri-Clamp® & Rectus 21
			S SMS Union (M)			R 1½" Tri-Clamp® & Hosebarb	S Stäubli™ RBE03 Inlet Only
			T Tri-Clamp®			T 1½" Tri-Clamp® Only	X No Drain
			W Butt Weld				
			BS4825 Pt.1				
<small>(1) Not suited for High Pressure Vessels. HP Vessels to use ANSI RF 300.</small>							
<small>(2) Only available in 1½".</small>							
Code Surface Finish		Internal	External	Code Tagged			
B Sanitary		0.4 µm	0.25 µm	T Yes			
P Sanitary Electropolished		0.4 µm EP	0.25 µm	X No			
<small>For Tagged Options customer identification numbers required at time of ordering</small>							

Stäubli™ is a trademark of Stäubli AG.

Tri-Clamp® is a trademark of Alfa-Laval, Inc.

Viton® is a registered trademark of DuPont Performance Elastomers L.L.C..

Note: All Tri-Clamp® connections conform to BS4825 Pt. 3

DS_FBH_03_01/14 Rev. 1B



VSH Multi Filter Housings

Beverage

Parker | **domnick**
hunter



- Multi-element sanitary liquid housing
- Designed specifically for the food and beverage industry
- High quality crevice free construction
- Available in 3 to 30 round versions
- Steam sterilizable

Specification

Materials of Construction

- Housing: 316L Stainless Steel
- Seals: EPDM FDA

Surface Finish

- Internal: Mechanically Polished Ra <0.8 µm
- External: Mechanically Polished

Steam Sterilization

Refer to Parker domnick hunter for individual housing parameters.

Design Code

Housings designed in accordance with the European Council Pressure Equipment Directive (PED) 97/23/EC and the UK statutory pressure equipment regulations (PER) 1999 N° 2001.

Design Basis

ASME VIII Division 1

Custom Design

Parker domnick hunter offers a specialist and fabrication service allowing individual customer system specifications to be met.

Note: For 12, 18, 24 and 30 Round options, please contact Parker domnick hunter for detailed technical drawings.

Working Condition PED 97/23/EC			Maximum Pressure			
Fluid Group	State	Temperature	031	032	033	034
Dangerous	Liquid	0 - 40 °C [0 - 104 °F]	10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)
Dangerous	Liquid	150 °C [302 °F]	7.5 barg (109 psig)	7.5 barg (109 psig)	7.5 barg (109 psig)	7.5 barg (109 psig)
Dangerous	Gas / Vapour	0 - 150 °C [0 - 302 °F]	6.8 barg (99 psig)	3.9 barg (57 psig)	2.8 barg (41 psig)	2.1 barg (30.5 psig)
Non Dangerous	Liquid	0 - 40 °C [0 - 104 °F]	10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)
Non Dangerous	Liquid	150 °C [302 °F]	7.5 barg (109 psig)	7.5 barg (109 psig)	7.5 barg (109 psig)	7.5 barg (109 psig)
Non Dangerous	Gas / Vapour	0 - 40 °C [0 - 104 °F]	10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)
Non Dangerous	Gas / Vapour	150 °C [302 °F]	7.5 barg (109 psig)	7.5 barg (109 psig)	7.5 barg (109 psig)	7.5 barg (109 psig)
Volume (litres)			7.3	12.6	17.8	23.1
Fluid Group	State	Temperature	051	052	053	054
Dangerous	Liquid	0 - 40 °C [0 - 104 °F]	10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)
Dangerous	Liquid	150 °C [302 °F]	7.5 barg (109 psig)	7.5 barg (109 psig)	7.5 barg (109 psig)	7.5 barg (109 psig)
Dangerous	Gas / Vapour	0 - 150 °C [0 - 302 °F]	4.5 barg (65 psig)	2.4 barg (35 psig)	1.7 barg (25 psig)	1.3 barg (19 psig)
Non Dangerous	Liquid	0 - 40 °C [0 - 104 °F]	10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)
Non Dangerous	Liquid	150 °C [302 °F]	7.5 barg (109 psig)	7.5 barg (109 psig)	7.5 barg (109 psig)	7.5 barg (109 psig)
Non Dangerous	Gas / Vapour	0 - 40 °C [0 - 104 °F]	10 barg (145 psig)	9.9 barg (144 psig)	6.8 barg (99 psig)	5.2 barg (75 psig)
Non Dangerous	Gas / Vapour	150 °C [302 °F]	7.5 barg (109 psig)	7.5 barg (109 psig)	6.8 barg (99 psig)	5.2 barg (75 psig)
Volume (litres)			11.0	20.0	29.1	38.2
Fluid Group	State	Temperature	081	082	083	084
Dangerous	Liquid	0 - 40 °C [0 - 104 °F]	10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)
Dangerous	Liquid	150 °C [302 °F]	7.5 barg (109 psig)	7.5 barg (109 psig)	7.5 barg (109 psig)	7.5 barg (109 psig)
Dangerous	Gas / Vapour	0 - 150 °C [0 - 302 °F]	2.3 barg (33 psig)	1.4 barg (20 psig)	1 barg (14.5 psig)	0.7 barg (10 psig)
Non Dangerous	Liquid	0 - 40 °C [0 - 104 °F]	10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)
Non Dangerous	Liquid	150 °C [302 °F]	7.5 barg (109 psig)	7.5 barg (109 psig)	7.5 barg (109 psig)	7.5 barg (109 psig)
Non Dangerous	Gas / Vapour	0 - 40 °C [0 - 104 °F]	9.4 barg (136 psig)	5.6 barg (81 psig)	4.0 barg (58 psig)	3.1 barg (45 psig)
Non Dangerous	Gas / Vapour	150 °C [302 °F]	7.5 barg (109 psig)	5.6 barg (81 psig)	4.0 barg (58 psig)	3.1 barg (45 psig)
Volume (litres)			21.3	35.3	49.7	63.9
PED Conformity Assessment Category			CAT I	CAT I	CAT I	CAT I





VSH Multi Filter Housings Beverage

Physical Characteristics

Type	Dimensions (mm)	Typical Weight
'A'	'B'	'C'
10" (250 mm)	606	840
20" (500 mm)	606	1060
30" (750 mm)	606	1310
40" (1000 mm)	606	1560
		290
		540
		790
		1040
		27.0
		30.0
		33.0
		36.0

Dimensions shown are for an 8 Round VSH, DN40 DIN2633 inlet / outlet connections. For the full range of dimensions and weights, please contact Parker domnick hunter.

Note: All housings are full vacuum rated.

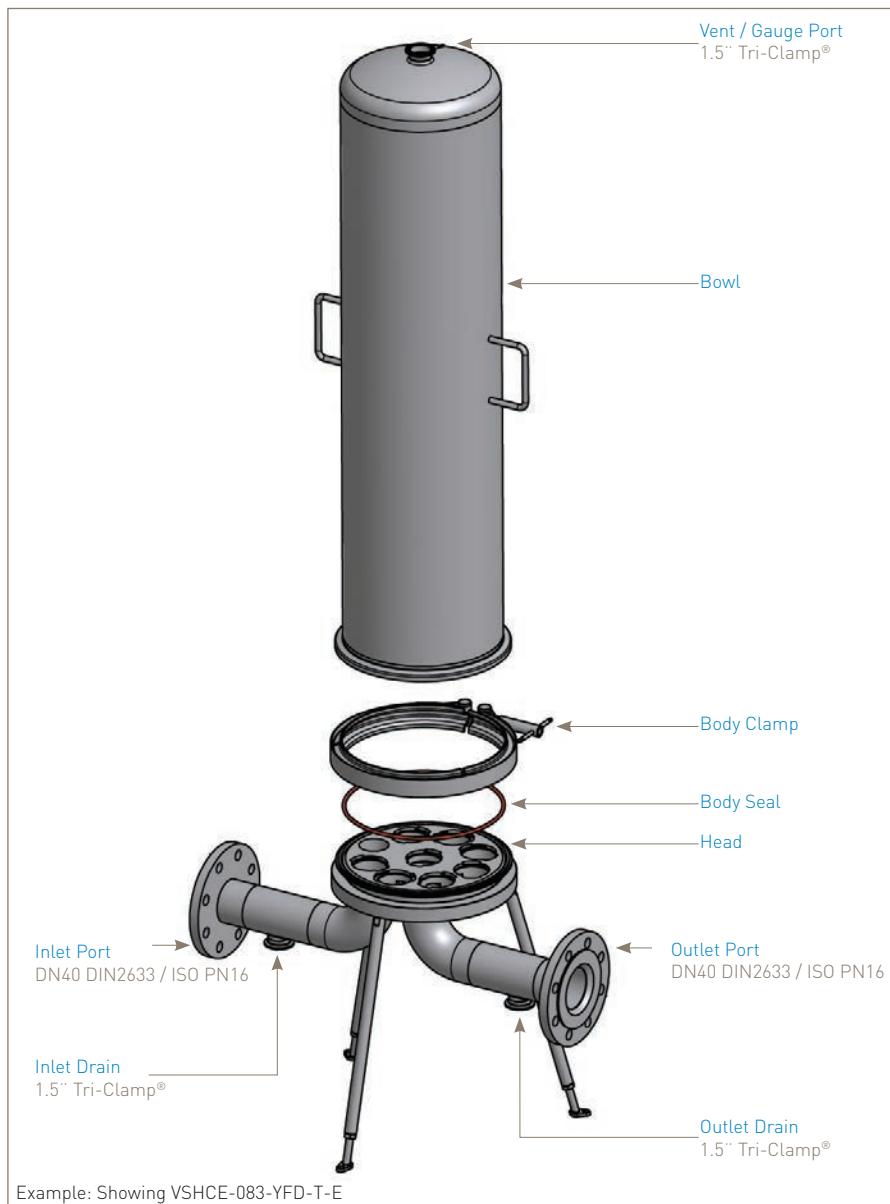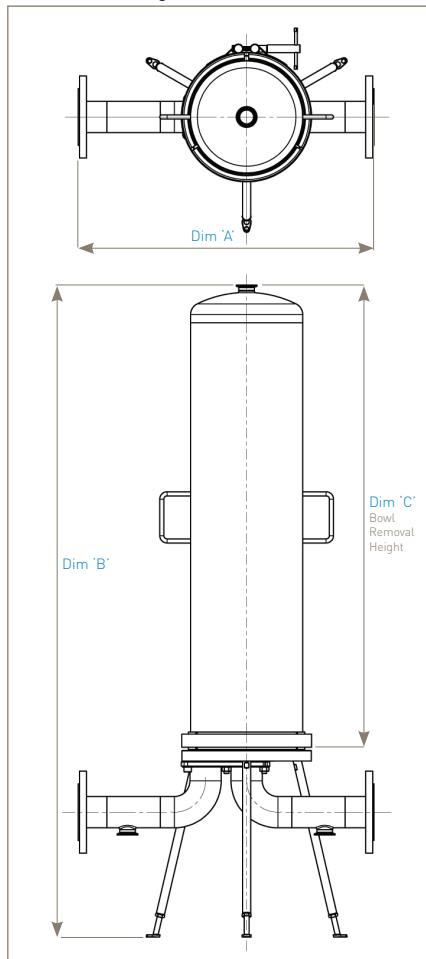

Ordering Information

VSH	<input type="text"/>	-	<input type="text"/>	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>
Code Vessel Class	Code N° of Cartridges	Code Length (Nominal)	Code Connection Size	Code Connection Type	Code Connection Standard	Code Vent / Drain Conn. Type	Code Seal			

CE Standard

03 3

05 5

08 8

12 12

18 18

24 24

30 30

1 10" (250 mm)

2 20" (500 mm)

3 30" (750 mm)

4 40" (1000 mm)

B 1"

Y 1.5"

C 2"

X 2.5"

D 3"

E 4"

D*

F*

M

R

T

W

NPT / ANSI

British Standard

DIN

ISO

A

B

C

D

I

E

S

V

FKM

Tri-Clamp®

Butt Weld

N° of Cartridges	1.5"	2"	2.5"	3"	4"
03	✓				
05	✓	✓			
08	✓	✓	✓	✓	✓
12				✓	✓
18				✓	✓
24				✓	✓
30				✓	✓

*Check flange size code to ensure correct item is supplied.

Tri-Clamp® is a trademark of Alfa-Laval, Inc.

Viton® is a registered trademark of DuPont Performance Elastomers L.L.C..

Note: 3, 5 and 8 Round housings available with 10", 20", 30" and 40" bowls
12, 18, 24 and 30 Round housings available with 20" and 30" bowls only

Note: For accessories, i.e. gauges, please contact Parker domnick hunter - Process Division for full availability.

Parker domnick hunter has a continuous policy of product development and although the Company reserves the right to change specifications, it attempts to keep customers informed of any alterations. This publication is for general information only and customers are requested to contact our Process Filtration Sales Department for detailed information and advice on a products suitability for specific applications. All products are sold subject to the company's standard conditions of sale.

DS_FBH_04_01/14 Rev. 1B



HBA Filter Housings

Air / Gas Filtration

Parker | **domnick**
hunter



- Flow efficient range of air / gas housings
- Demi (TRUESEAL) and K-40" (226) housing sizes
- Designed to maximize flow and minimize pressure drop
- Designed specifically for the food and beverage industry
- STANDARD product
 - Economy and short delivery lead times
- PLUS product
 - Available in 4 different vessel classes:
Standard CE, Atex, High Pressure and Oxygen Service
 - Standard, sanitary and sanitary electropolished surface finishes available
 - A number of inlet / outlet port connections
 - Wide range of vent and drain options

Specification

STANDARD Range

Materials of Construction

- Housing: 316L Stainless Steel
- Seals: Silicone FDA
- Vent / Drain Seals: PTFE FDA
- Clamps: 304 Stainless Steel

Standard Surface Finish

- Internal: As welded
- External: Polished 0.8 µm Ra (32 µIn Ra)
All finishes pickled and passivated.

PLUS Range

Materials of Construction

- Housing: 316L Stainless Steel
- Body Seals: Viton® / FKM FDA
- EPDM FDA
- PTFE FDA
- Silicone FDA
- Clamps: 304 Stainless Steel

Surface Finish

Parker domnick hunter's PLUS range of filter housings are available in a wide range of surface finishes and options. Please see product coding.

Welding

All assembly welds are full penetration.
All welds are crevice and undercut free.
Weld finish and detail drawings available upon request.

Certification

Supplied as standard with vessel inspection certificate.

Material Test Certification

EN10204 3.1 supplied upon request.

Design Code

Housings designed in accordance with the European Council Pressure Equipment Directive (PED) 97/23/EC and the UK statutory Pressure Equipment Regulations (PER) 1999 N° 2001.

Design Basis

ASME VIII Division 1.



STANDARD Range

Working Condition PED 97/23/EC			Maximum Pressure				
Fluid Group	State	Temperature	01A	01B	01K	011	012
Non Dangerous	Gas / Vapour	150 °C (302 °F)	10 barg (145 psig)				
Dangerous	Gas / Vapour	150 °C (302 °F)	10 barg (145 psig)	10 barg (145 psig)	5 barg (73 psig)	5 barg (73 psig)	5 barg (73 psig)
PED Conformity Assessment Category			SEP	SEP	SEP	SEP	CAT I
Volume (litres)			0.75	0.5	2.5	3.7	5.6

PLUS Range

CE Working Condition PED 97/23/EC			Maximum Pressure						
Fluid Group	State	Temperature	01A	01B	01K	011	012	013	014
Non Dangerous	Gas / Vapour	150 °C (302 °F)	10 barg (145 psig)						
Dangerous	Gas / Vapour	150 °C (302 °F)	10 barg (145 psig)	10 barg (145 psig)	8 barg (116 psig)	8 barg (116 psig)	8 barg (116 psig)	7 barg (102 psig)	5 barg (73 psig)
PED Conformity Assessment Category			SEP	SEP	SEP	CAT I	CAT I	CAT I	CAT I
Volume (litres)			0.75	0.5	2.5	3.7	5.6	7.5	9.4

ATEX Working Condition PED 97/23/EC			Maximum Pressure						
Fluid Group	State	Temperature	01A	01B	01K	011	012	013	014
Non Dangerous	Gas / Vapour	135 °C (275 °F)	10 barg (145 psig)						
Dangerous	Gas / Vapour	135 °C (275 °F)	8 barg (116 psig)	7 barg (102 psig)	5 barg (73 psig)				
PED Conformity Assessment Category			SEP	SEP	SEP	CAT I	CAT I	CAT I	CAT I
Volume (litres)			0.75	0.5	2.5	3.7	5.6	7.5	9.4

High Pressure Working Condition PED 97/23/EC			Maximum Pressure						
Fluid Group	State	Temperature	01A	01B	01K	011	012	013	014
Non Dangerous	Gas / Vapour	205 °C (401 °F)	16 barg (232 psig)						
PED Conformity Assessment Category			SEP	SEP	SEP	CAT I	CAT I	CAT I	CAT I
Volume (litres)			0.75	0.5	2.5	3.7	5.6	7.5	9.4

Oxygen Service Working Condition PED 97/23/EC			Maximum Pressure						
Fluid Group	State	Temperature	01A	01B	01K	011	012	013	014
Dangerous	Gas / Vapour	150 °C (302 °F)	10 barg (145 psig)	10 barg (145 psig)	8 barg (116 psig)	8 barg (116 psig)	8 barg (116 psig)	6.6 barg (96 psig)	5.3 barg (77 psig)
PED Conformity Assessment Category			SEP	SEP	SEP	CAT I	CAT I	CAT I	CAT I
Volume (litres)			0.75	0.5	2.5	3.7	5.6	7.5	9.4

Note: All housings are full vacuum rated.





HBA Filter Housings

Air / Gas Filtration

Physical Characteristics

Bowl Height	Dimensions (mm)			Typical Weight
	'A'	'B'	'C'	
A Size 125 mm (5")	175 mm (6.9")	258 mm (10.2")	130 mm (5.1")	1.6 Kg (3.5lbs)
B Size 65 mm (2 1/2")	175 mm (6.9")	203 mm (8.0")	70 mm (2.8")	1.5 Kg (3.3lbs)
K Size 125 mm (5")	231 mm (9.1")	375 mm (14.8")	223 mm (8.8")	3.3 Kg (9.3 lbs)
10 in 250 mm (10")	231 mm (9.1")	525 mm (20.7")	342 mm (13.5")	3.9 Kg (8.6 lbs)
20 in 500 mm (20")	231 mm (9.1")	775 mm (30.5")	590 mm (23.2")	4.9 Kg (10.8 lbs)
30 in 750 mm (30")	231 mm (9.1")	1020 mm (40.2")	838 mm (33.0")	5.9 Kg (13 lbs)
40 in 1000 mm (40")	231 mm (9.1")	1270 mm (50")	1068 mm (42.0")	6.9 Kg (15.2 lbs)

Dimensions shown are based on the STANDARD range. For accurate dimensions, please contact Parker domnick hunter.

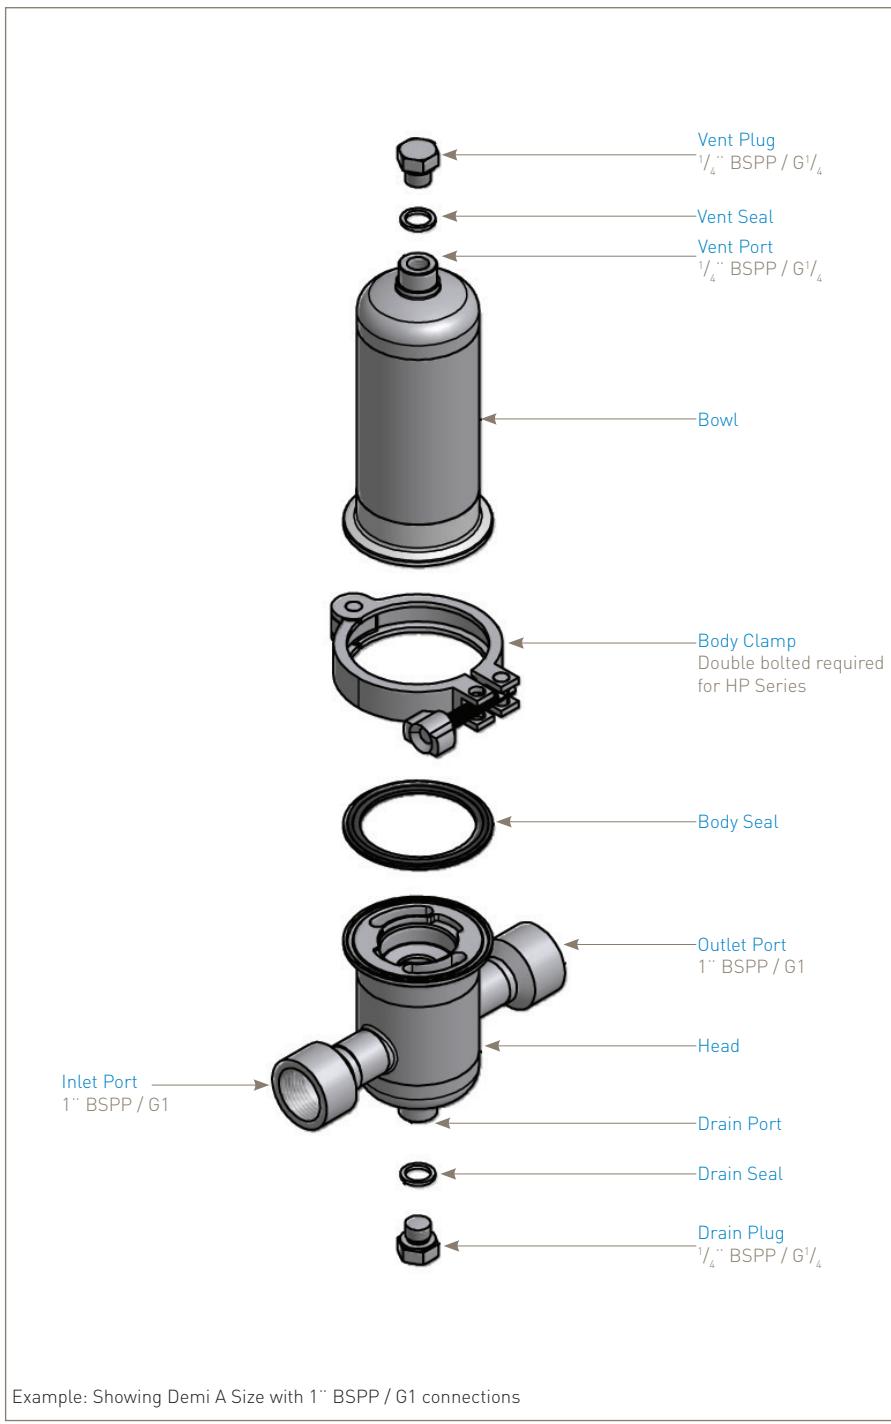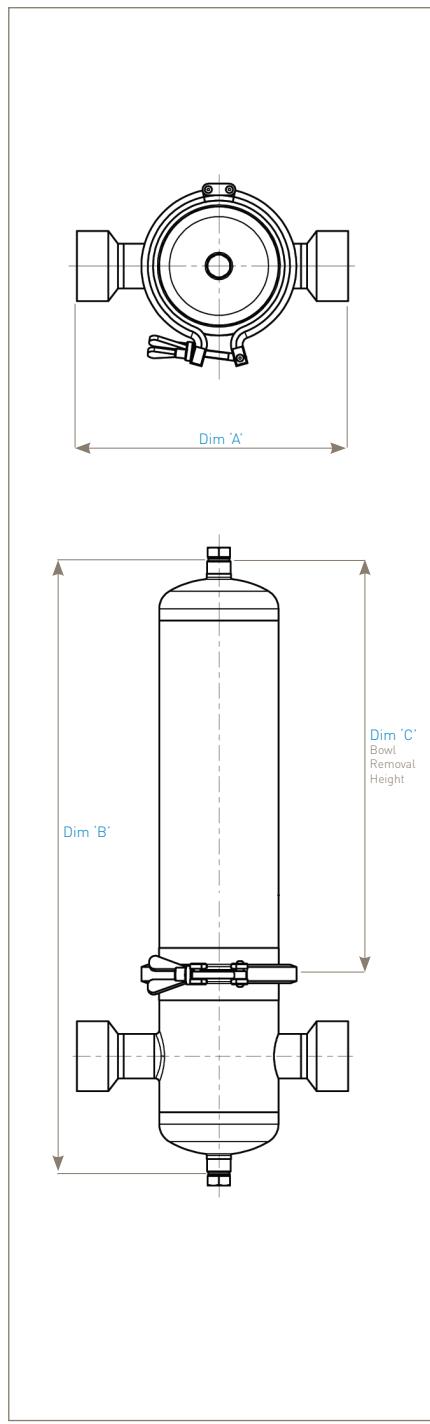


Example: Showing Demi A Size with 1" BSPP / G1 connections

The PLUS product range is available with many options of connections, vents, drains, surface finish, seals classification, etc. Please see product coding.




STANDARD Range - K to 20"




Code Vessel Class	Code Length (Nominal)	Code Connection Size	Code Standard	Code Cartridge	Code Seal
CE Standard	K 5" (125 mm)	Y 1 1/2" (38.1 mm)	B BSPP / ISO 228	C 226	S Silicone
1	10" (250 mm)	N NPT			
2	20" (500 mm)				

STANDARD Range - Demi A & B




Code Vessel Class	Code Length (Nominal)	Code Connection Size	Code Standard	Code Cartridge	Code Seal
CE Standard	A 5" (125 mm)	B 1"	B BSPP / ISO 228	C 226	S Silicone
	B 2 1/2" (65 mm)	N NPT			

PLUS Range - K to 40"

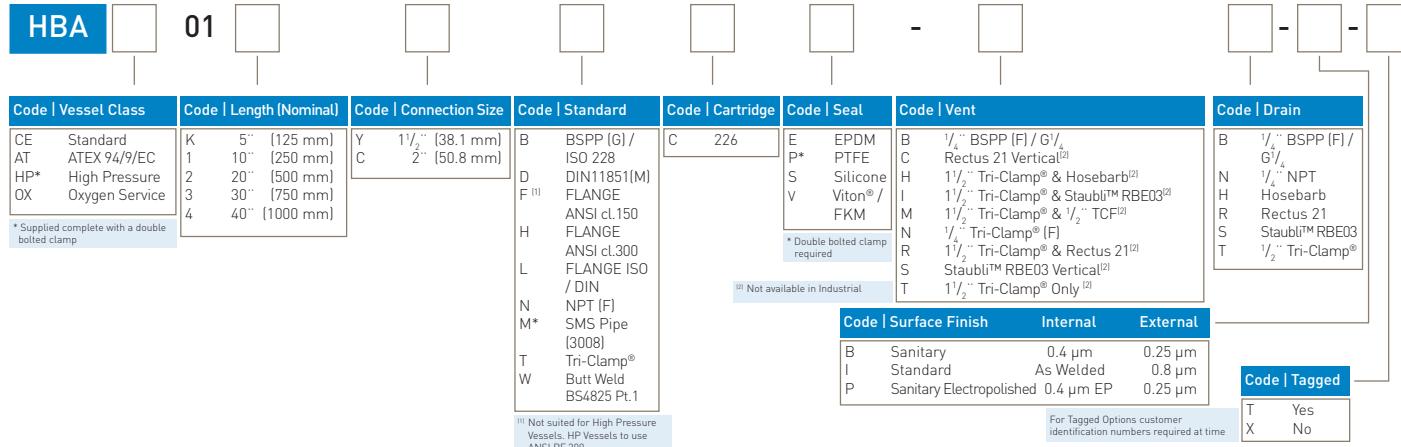

PLUS Range - Demi A & B

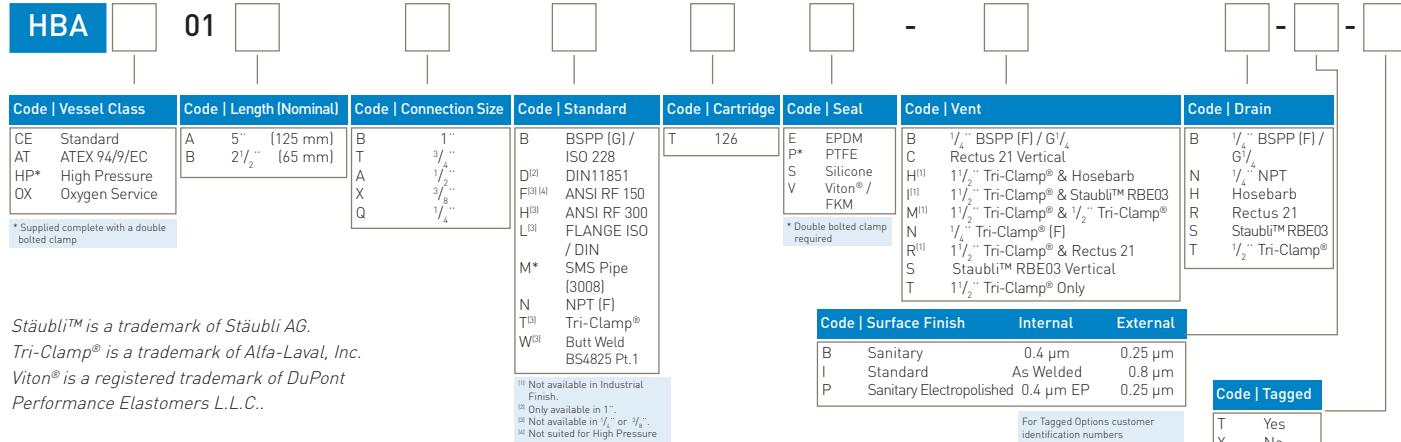

Stäubli™ is a trademark of Stäubli AG.

Tri-Clamp® is a trademark of Alfa-Laval, Inc.

Viton® is a registered trademark of DuPont

Performance Elastomers L.L.C..

Note: All Tri-Clamp® connections conform to BS4825 Pt. 3

Parker domnick hunter has a continuous policy of product development and although the Company reserves the right to change specifications, it attempts to keep customers informed of any alterations. This publication is for general information only and customers are requested to contact our Process Filtration Sales Department for detailed information and advice on a products suitability for specific applications. All products are sold subject to the company's standard conditions of sale.

DS_FBH_05_01/14 Rev. 1B



HPG Enhanced Plus Filter Housings

High pressure air / gas

Parker | **domnick** **hunter**



- Flow efficient range of housings for sterile filtration higher pressure air and gases
- Standard, sanitary and sanitary electropolished surface finishes available
- A number of inlet / outlet port connections available
- Range of vent and drain options
- Two pressure ratings:
 - 25 barg (363 psig) @ 130 °C (266 °F)
 - Typical application CO₂ and nitrogen sterile filtration
 - Higher pressure steam to 16 barg (232 psig)
 - 40 barg (580 psig) @ 130 °C (266 °F)
 - Typical application PET bottle blowing
 - Higher pressure steam to 32 barg (464 psig)
 - Group 1 gases, solvents and vapours to 16 barg (232 psig)

Specification

Materials of Construction

I	Housing:	316L Stainless Steel
I	Seals:	EPDM FDA
		Silicone FDA
		Viton™ / FKM FDA
		PTFE FDA
I	Vent / Drain Seals:	PTFE FDA

Standard Surface Finish

I	Internal:	As welded
		Pickled and Passivated
I	External:	Polished 0.8 µm Ra

Sanitary Surface Finish

I	Internal:	Polished 0.4 µm Ra
I	External:	Polished 0.25 µm Ra

Sanitary Electropolished Finish

I	Internal:	Electropolished 0.4 µm Ra
I	External:	Polished 0.25 µm Ra

Welding

All assembly welds are full penetration. All welds are crevice and undercut free. Weld finish & detail drawings available upon request.

Design Code

Housings designed in accordance with the European Council Pressure Equipment Directive (PED) 97/23/EC and the UK statutory Pressure Equipment Regulations (PER) 1999 N° 2001.

Design Basis

ASME VIII Division 1

HPG25			Maximum Pressure					
Fluid Group	State	Temperature	01B	01A	01K	011	012	013
Non Dangerous	Gas / Vapour	130 °C (266 °F)	25 barg (362 psig)					
	Steam	204 °C (400 °F)	16 barg (232 psig)					
PED Conformity Assessment Category			SEP	SEP	CAT I	CAT I	CAT I	CAT I
Volume (litres)			0.5	0.7	2.5	3.5	5.5	7.5

HPG40			Maximum Pressure					
Fluid Group	State	Temperature	01B	01A	01K	011	012	013
Non Dangerous	Gas / Vapour	130 °C (266 °F)	40 barg (580 psig)					
	Steam	239 °C (462 °F)	32 barg (464 psig)					
PED Conformity Assessment Category			SEP	SEP	CAT I	CAT II	CAT II	CAT II
Volume (litres)			0.5	0.7	2.5	3.5	5.5	7.5

HPG40			Maximum Pressure					
Fluid Group	State	Temperature	01B	01A	01K	011	012	013
Dangerous Group I	Gas / Vapour	130 °C (266 °F)	16 barg (232 psig)					
PED Conformity Assessment Category			SEP	SEP	CAT I	CAT II	CAT II	CAT II
Volume (litres)			0.5	0.7	2.5	3.5	5.5	7.5

Note: All housings are full vacuum rated.





HPG Enhanced Plus Filter Housings

High pressure air / gas

Physical Characteristics

Bowl Height	Dimensions (mm)	Typical Weight (Kg)
	'A' 'B' 'C'	Bowl Head Total
B Size (65 mm)	175 253 70	0.75 1.50 2.25
A Size (125 mm)	175 308 130	1.00 1.50 2.50
K Size (125 mm)	259 398 223	1.00 5.40 7.00
10" (250 mm)	259 550 342	1.60 5.40 7.60
20" (500 mm)	259 800 590	2.60 5.40 8.60
30" (750 mm)	259 1050 840	3.60 5.40 9.60

Dimensions shown are for a vessel with 1 1/2" BSPP / G 1 1/2", 1/4" BSPP / G 1/4" vent and drain. For other formats, please contact Parker domnick hunter.

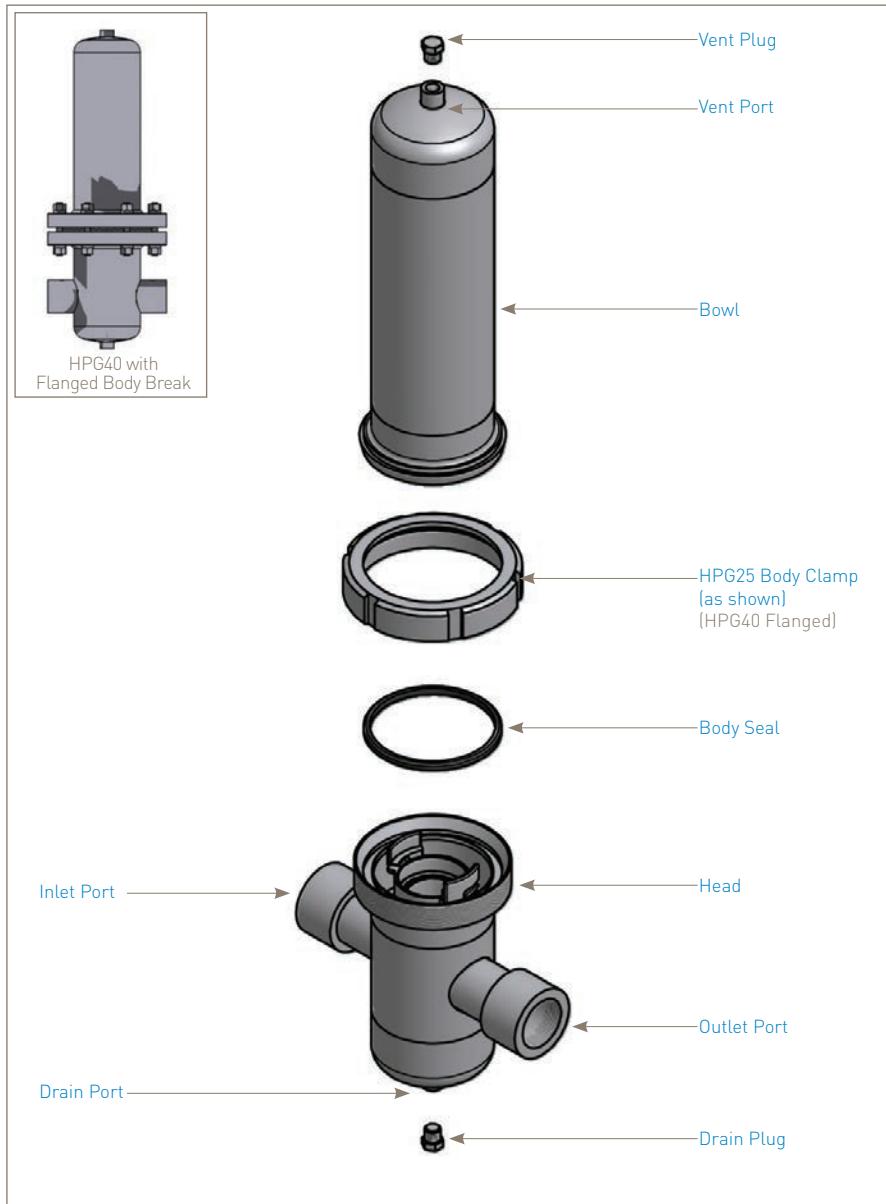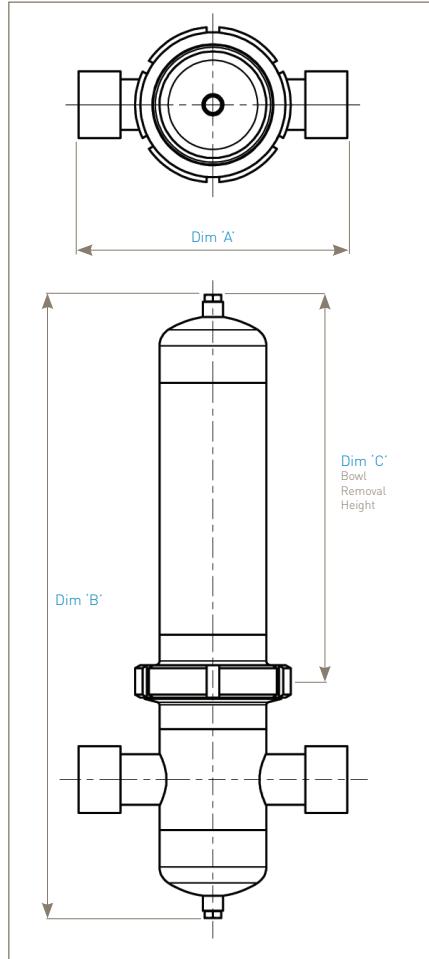

Ordering Information

HPG	<input type="checkbox"/>	01	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Code Vessel Class	Code Length (Nominal)	Code Connection Size	Code Standard	Code Cartridge	Code Seal	Code Vent	Code Drain					
25 25 barg	B 2.5" (65 mm)	B ^[1] 1" (25.4 mm)	B ^[3] BSPP (F) / ISO 228	C 226	E EPDM	B 1/4" BSPP (F) / G 1/4"	B 1/4" BSPP (F) / G 1/4"					
40 40 barg	A 5" (125 mm)	Y ^[2] 1 1/2" (48.3 mm)	H ^[3] FLANGE ANSI cl. 300	T 126	P PTFE	N 1/4" NPT (F)	N 1/4" NPT (F)					
	K 5" (125 mm)	L ^{[3][4]} FLANGE ISO / DIN	S Silicone		V Viton™ / FKM							
	1 10" (250 mm)	N ^[3] NPT (F)										
	2 20" (500 mm)	W ^{[1][2]} Butt Weld										
	3 30" (750 mm)											

Notes:

- Demi A & B housings have 1" OD (Ø25.4 x 1.6 - BS4825) connections only and TRUESEAL (Code T) cartridge, DIN Union body break.
- K - 30" housings have 1.5" NPS Sch10s (Ø48.3 x 2.77 ANSI B36.19) connection and 226 (Code C) cartridges.
- Sanitary - screwed and traditional flanges not considered sanitary.
- Flanged 'L' code connections as follows: HPG25 ISO DIN PN40
HPG40 ISO DIN PN63

5. Viton™ is a registered trademark of DuPont Performance Elastomers L.L.C..

Code Surface Finish	Internal	External
B Sanitary	0.4 µm	0.25 µm
I Standard	As Welded	0.8 µm
P Sanitary Electropolish	0.4 µm EP	0.25 µm

Code Tagged
T Yes
X No

For Tagged Options customer identification numbers required at time

Parker domnick hunter has a continuous policy of product development and although the Company reserves the right to change specifications, it attempts to keep customers informed of any alterations. This publication is for general information only and customers are requested to contact our Process Filtration Sales Department for detailed information and advice on a products suitability for specific applications. All products are sold subject to the company's standard conditions of sale.

DS_FBH_06_01/14 Rev. 1B



HSV Filter Housings

Vent applications



- Direct connection to tank boss allows housing to be self-supportive
- Easy assembly and maintenance
- STANDARD product
 - Standard surface finish and tri-clamp connection
- PLUS product
 - Available as STANDARD or for Atex applications
 - Standard, sanitary and sanitary electropolished surface finishes available
 - Connection choices

(Also see HSVLP L-Port Datasheet)

Specification

STANDARD Range

Materials of Construction

Housing:	316L Stainless Steel
Seals:	Silicone FDA
Clamps:	304 Stainless Steel

Surface Finish

Internal:	As welded
External:	Polished 0.8 µm (32 µln Ra)

All finishes pickled and passivated

PLUS Range

Materials of Construction

Housing:	316L Stainless Steel
Seals:	EPDM FDA
	Silicone FDA

Viton® / FKM FDA

Note: Seal used only to position bowl clamp arrangement.

Clamps:	304 Stainless Steel
---------	---------------------

Standard Surface Finish

Internal:	As welded
	Pickled and Passivated
External:	Polished 0.8 µm Ra (32 µln Ra)

Sanitary Finish

Internal:	Polished 0.4 µm Ra (16 µln Ra)
External:	Polished 0.25 µm Ra (10 µln Ra)

Sanitary Electropolished Finish

Internal:	Polished 0.4 µm Ra (16 µln Ra) and Electropolished
External:	Polished 0.25 µm Ra (10 µln Ra)

Welding

All assembly welds are full penetration.
All welds are crevice and undercut free.
Weld finish and detail drawings available upon request.

Certification

Supplied as standard with vessel inspection certificate

Material Test Certification

EN10204 3.1 supplied upon request.

Recommended Operation Guidelines

Sizing

Sizing vent vessels particularly for vacuum sensitive tanks can require specialist advice. It is important that VENT housings are sized on maximum gas flow capacity under actual operation conditions.

Vacuum Protection


Where a tank is vacuum sensitive, there is a risk of tank collapse. In such cases the fitting of an appropriately rated bursting disc (or similar) and, if necessary a pressure relief valve, is highly recommended.



Physical Characteristics

Bowl Height	Dimensions [mm]			Typical Weight
	'A'	'B'	'C'	
A Size 125 mm [5"]	75 mm [2.9"]	195 mm [7.7"]	130 mm [5.1"]	1.0 Kg [2.2lbs]
B Size 65 mm [2 1/2"]	75 mm [2.9"]	140 mm [5.5"]	70 mm [2.8"]	0.9 Kg [1.9lbs]
125 mm [5"]	132 mm [5.2"]	242 mm [9.5"]	194 mm [7.6"]	2.2 Kg [4.8 lbs]
250 mm [10"]	132 mm [5.2"]	392 mm [15.4"]	313 mm [12.3"]	2.8 Kg [6.1 lbs]
500 mm [20"]	132 mm [5.2"]	642 mm [25.3"]	561 mm [22.1"]	3.8 Kg [8.3 lbs]
750 mm [30"]	132 mm [5.2"]	890 mm [35.0"]	809 mm [31.8"]	4.8 Kg [10.6 lbs]
1000 mm [40"]	132 mm [5.2"]	1138 mm [44.8"]	1057 mm [41.6"]	5.8 Kg [12.8 lbs]

Dimensions shown are based on the STANDARD range. For accurate dimensions, please contact Parker domnick hunter.

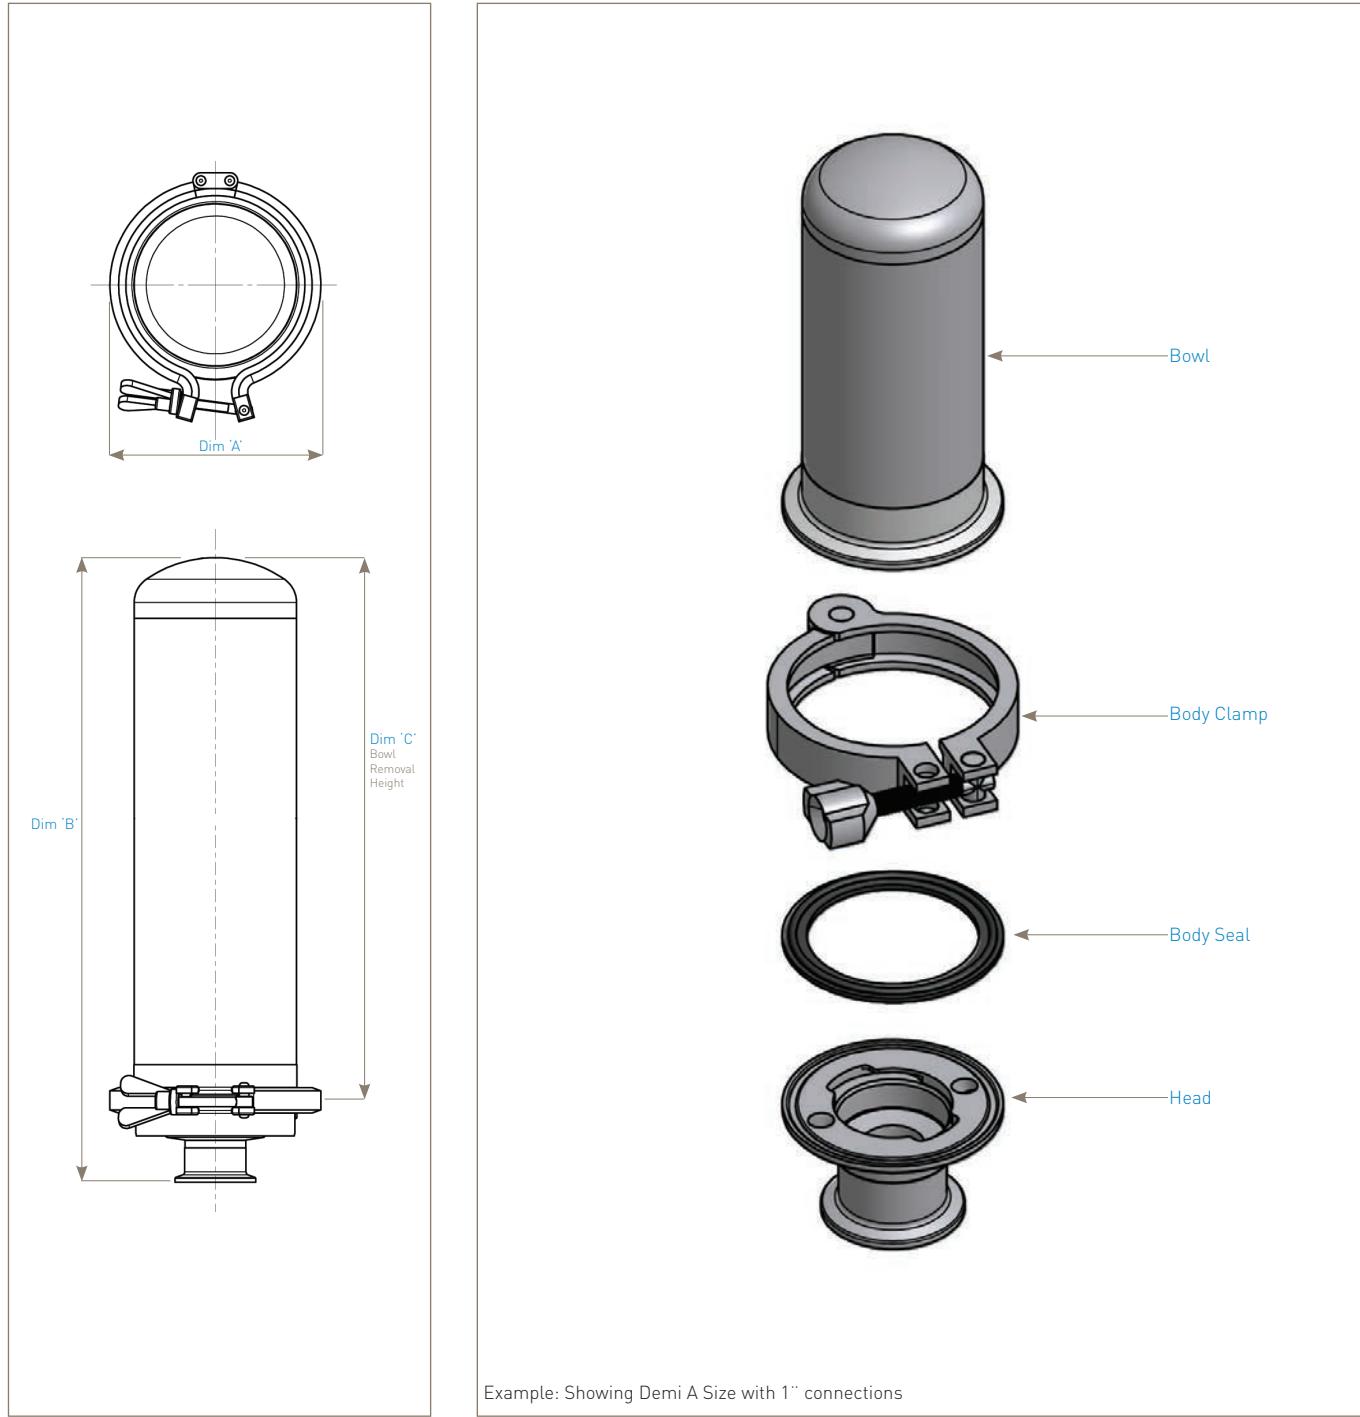

The PLUS product range is available with many options of connections, vents, drains, surface finish, seals classification, etc. Please see product coding.

Note: All housings are full vacuum rated.



HSV Filter Housings

Vent applications



STANDARD Range - K to 20"

HSV		01			-		-		-	
Code Vessel Class Code Length (Nominal) Code Connection Size Code Standard Code Cartridge Code Seal										
DH Vent Housing	K 5" (125 mm) 1 10" (250 mm) 2 20" (500 mm)	Y 1 1/2" (38.1 mm)	T Tri-Clamp®	C 226	S Silicone					

STANDARD Range - Demi A & B

HSV		01			-		-		-	
Code Vessel Class Code Length (Nominal) Code Connection Size Code Standard Code Cartridge Code Seal										
DH Vent Housing	A 5" (125 mm) B 2 1/2" (65 mm)	B 1" (25.4 mm)	T Tri-Clamp®	T 126	S Silicone					

PLUS Range - K to 40"

HSV		01							Internal	External	Code Tagged
DH Standard	K 5" (125 mm)	C 2" (50.8 mm)	B BSPP (F) / ISO 228	C 226	E EPDM	B Sanitary	0.4 µm	0.25 µm			T Yes
AT ATEX	1 10" (250 mm)	Y 1 1/2" (38.1 mm)	D DIN11851(M)	P PTFE	I Standard	As Welded	0.8 µm				X No

For Tagged Options customer identification numbers required at time of ordering

PLUS Range - Demi A & B

HSV		01							Internal	External	Code Tagged
DH Standard	A 5" (125 mm)	B 1" (25.4 mm)	B BSPP (F) / ISO 228	T 126	E EPDM	B Sanitary	0.4 µm	0.25 µm			T Yes

For Tagged Options customer identification numbers required at time of ordering

Stäubli™ is a trademark of Stäubli AG.

Tri-Clamp® is a trademark of Alfa-Laval, Inc.

Viton® is a registered trademark of DuPont Performance Elastomers L.L.C..

Note: All Tri-Clamp® connections conform to BS4825 Pt. 3

Parker domnick hunter has a continuous policy of product development and although the Company reserves the right to change specifications, it attempts to keep customers informed of any alterations. This publication is for general information only and customers are requested to contact our Process Filtration Sales Department for detailed information and advice on a products suitability for specific applications. All products are sold subject to the company's standard conditions of sale.

DS_FBH_07_01/14 Rev. 1B





VIS Filter Housings

High Flow Steam



- Specifically designed to maximize flow rates and minimize pressure drop
- Compatible with JUMBO element to maximize steam capacity

Specification

STANDARD Range

Materials of Construction

Housing:	316L Stainless Steel
Seals:	EPDM FDA

Surface Finish

Internal:	Inside of outlet and distribution box to be mechanically polished 0.8 µm Ra. Pickled and Passivated.
External:	Grit blast 5 µm Ra mean

Maximum Allowable Working Pressure (MAWP)

7 barg (101.5 psig)

Maximum Allowable Working Temperature (MAWT)

170.5°C (339°F)

Design Code

Housings designed in accordance with the European Council Pressure Equipment Directive (PED) 97/23/EC and the UK statutory pressure equipment regulations (PER) 1999 № 2001.

Design Basis

ASME VIII Division 1.





Physical Characteristics

Type	Dimensions (mm)			Typical Weight
	'A'	'B'	'C'	
VISCE-01J -DD	300	763	310	30.0
VISCE-01J -ED	330	895	140	50.0
VISCE-3J -DD	515	1049	410	100.0
VISCE-3J -ED	700	1237	490	

For the full range of dimensions and weights, please contact Parker domnick hunter.

Note: All housings are full vacuum rated.

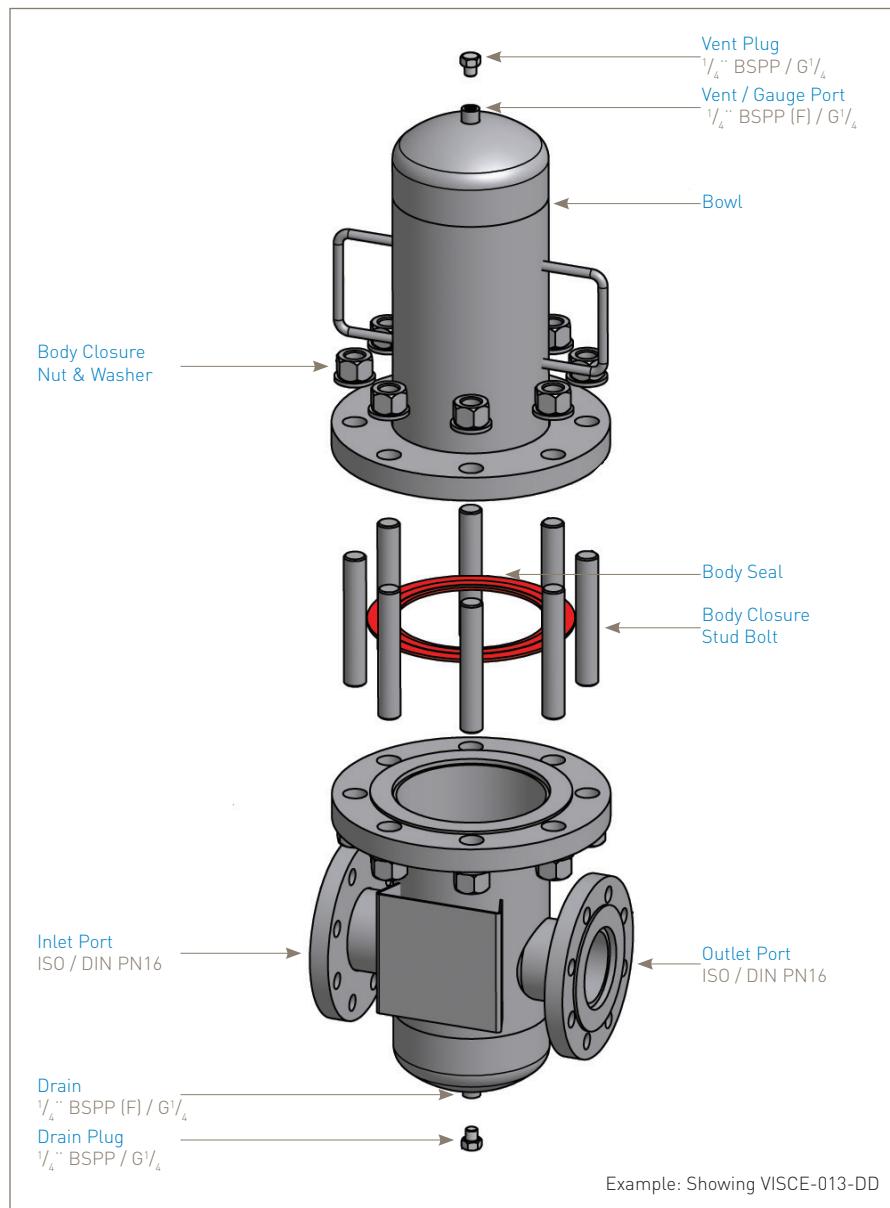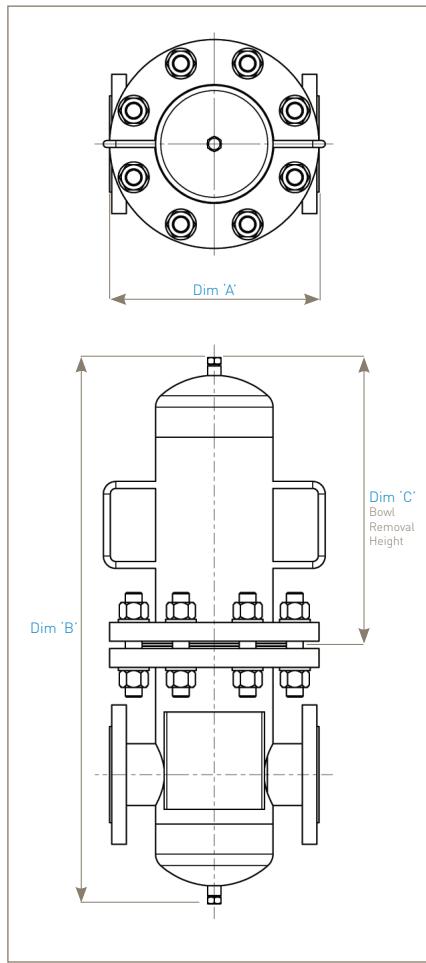

Example: Showing VISCE-013-DD

Ordering Information

VIS - - - -

Code Vessel Class	Code N° of Cartridges	Code Length (Nominal)	Code Connection Size	Code Connection Type
CE Standard	01 1 03 3	J Jumbo	D* E* G** H**	3" 4" 6" 8" ISO / DIN PN16 Flange ANSI cl. 150 Flange

* Single housings only


** Round housings only

Note: For accessories, i.e. gauges, please contact Parker domnick hunter - Process Division for full availability.

End Cap styles



Cartridge End Caps

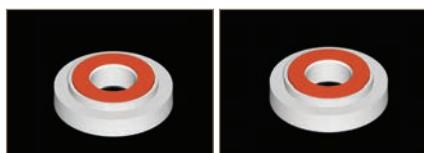


B, L Style Flat Gaskets



C Style 226 o-rings



D Style 222 o-rings

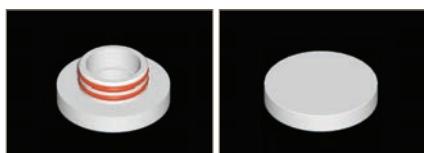

E Style 222 o-rings



G Style 222 o-rings




H Style 54 mm ID
x 4 mm o-rings



P Style 227 o-rings




R Style 222 o-rings

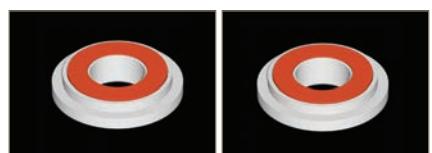

S Style Flat Gaskets



T Style 126 o-rings
(demi only)

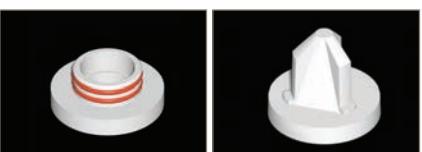

U Style 222 o-rings




W Style 111 o-rings
(demi only)



Y Style 116 o-rings
(internal) (demi only)



Z Style 116 o-rings
(internal) (demi only)

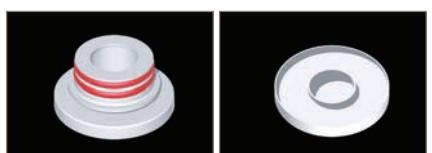


Demi H Style 217 o-rings
(demi only)


Other end cap options are available




Vent autoclave filter End Caps and dimensions

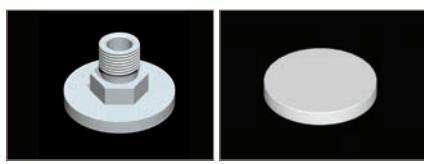


X Style $\frac{1}{2}$ '' NPTM
Thread & Gasket

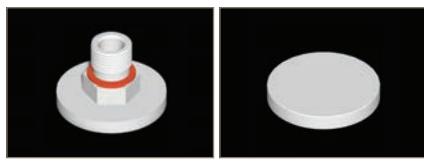

V Style BSPP
Thread & Gasket

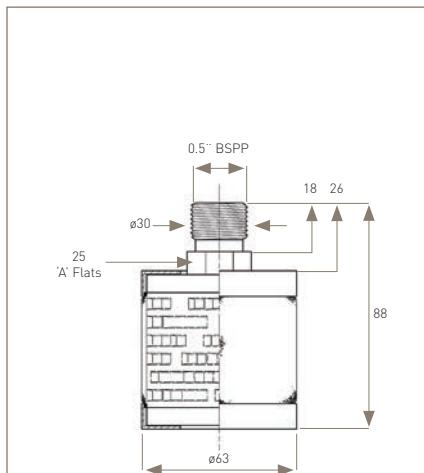

'B' Size

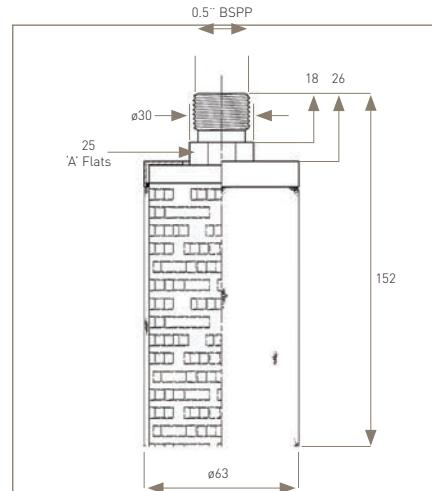


'A' Size


End Cap cross reference chart

Parker domnick hunter	PA	MI	SA
B	MCY 10''	F	23
C (10'' Size)	7	7	25
C (K Size)	2		
D	8	5	26
E / G	E = 3 / G = 25	0	27
F	MYS	8	24
L	MCY 20'' and above	F	23
R			28
X			
Y	MCY2230		
Z	MCY2230 / 4463		


Cartridge dimensions




'B' Size



'A' Size



'K' Size

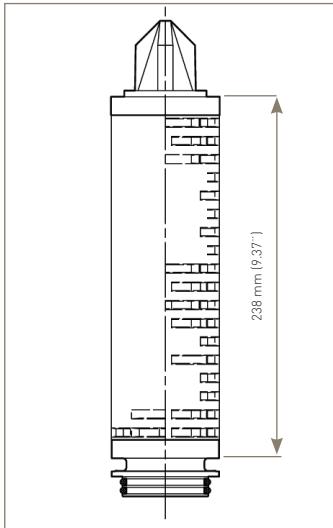

10'' Size



Conversion tables

Volume rate of flow

CONVERT	FROM	TO →	Multiplying Factors									
			litre / sec	litre / hr	m³ / sec	m³ / hr	ft³ / min	ft³ / hr	UK gal / min	UK gal / hr	US gal / min	US gal / hr
↓ litre / sec			1.	3600.	0.001	3.6	2.118882	127.133	13.19814	791.8884	15.85032	951.019
litre / hr			0.000278	1.	0.00000028	0.001	0.000588	0.035315	0.003666	0.219969	0.004403	0.264172
m³ / sec			1000.	3 600 000.	1.	3600.	2118.88	127 133.	13 198.1	791 889.	15 850.3	951 019.
m³ / hr			0.27778	1000.	0.000278	1.	0.588578	35.3415	3.66615	219.969	4.402863	264.1718
ft³ / min			0.471947	1699.017	0.000472	1.699017	1.	60.	6.228833	373.730	7.480517	448.8310
ft³ / hr			0.007866	28.3168	-	0.028317	0.01667	1.	0.103814	6.228833	0.124675	7.480517
UK gal / min			0.0757	272.766	0.0000758	0.272766	0.160544	9.63262	1.	60.	1.20095	72.05700
UK gal / hr			0.001263	4.54609	-	0.004546	0.002676	0.160544	0.016667	1.	0.020016	1.20095
US gal / min			0.063090	226.8	0.0000631	0.227125	7.4805	448.8	0.832674	49.96045	1.	60.
US gal / hr			0.001052	3.785411	-	0.003785	0.133681	0.133681	0.013878	0.832674	0.016667	1.

Pressure (liquid column, atmospheric, etc.)

CONVERT	FROM	TO →	Multiplying Factors									
			lb / in²	lnH₂O	ftH₂O	inHg	atmos.	mmHg	mbar	kgf / cm²	N / m²	N / mm²
↓ lb / in²			1.	27.6799	2.30667	2.03602	0.068046	51.7149	68.9476	0.070307	6894.76	0.0068948
lnH₂O			0.036127	1.	0.083333	0.073556	0.0024583	1.86832	2.49089	0.002540	249.089	0.0002491
ftH₂O			0.433528	12.	1.	0.882671	0.029500	22.4198	29.8907	0.03048	2989.07	0.0029891
inHg			0.491154	13.5951	1.13292	1.	0.033421	25.4	33.8639	0.034532	3386.39	0.003386
atmos.			14.6959	406.781	33.8984	29.9213	1.	760.000	1013.25	1.03323	101 235.	0.101325
mmHg			0.019337	0.535240	0.044603	0.03937	0.0013158	1.	1.33322	0.0013591	133.322	0.0001333
mbar			0.014504	0.401463	0.033455	0.029530	0.0009869	0.750062	1.	0.0010197	100.	0.0001
kgf / cm²			14.2233	393.700	32.8084	28.959	0.967841	735.559	980.655	1.	98 066.5	0.98066
N / m²			0.000145	0.004015	0.0003345	0.0002953	0.000099	0.007501	0.01	0.0000102	1.	0.000001
N / mm²			145.038	4014.63	334.553	295.300	9.86923	7500.62	10 000.	10.1972	1 000 000.	1.

Mass

CONVERT	FROM	TO →	Multiplying Factors						
			grain	metric carat	gram	dram	drachm (apoth)	oz	oz tr or oz apoth
↓ grain			1.	0.323995	0.064799	0.36571	0.016667	0.002286	0.002083
metric carat			3.08647	1.	0.2	0.112877	0.51441	0.007055	0.006430
gram			15.4324	5.	1.	0.564383	0.257206	0.035274	0.032151
dram			27.34375	8.85923	1.77185	1.	0.455729	0.0625	0.056966
drachm (apoth)			60.	19.4397	3.88793	2.19429	1.	0.137143	0.125
oz			437.5	141.748	28.3495	16.	7.29167	1.	0.911458
oz tr or oz path			480.	155.517	31.1035	17.5543	8.	1.09714	1.



Conversion tables

Mass

CONVERT	Multiplying Factors							
	lb	kg	slug	US cwt	UK cwt	oz / US ton	tonne	UK ton
lb	1.	0.453592	0.031081	0.01	0.008929	0.0005	0.000454	0.000446
kg	2.20462	1.	0.068522	0.022046	0.019684	0.001102	0.001	0.000984
slug	32.1740	14.5939	1.	0.32174	0.287268	0.016087	0.014594	0.014363
US cwt	100.	45.3592	3.10810	1.	0.892857	0.05	0.045359	0.044643
UK cwt	112.	50.8023	3.481072	1.12	1.	0.056	0.050802	0.05
oz / US ton	2000.	907.185	62.1620	20.	17.8571	1.	0.907185	0.892857
tonne	2204.62	1000.	68.5218	22.0462	19.6841	1.10231	1.	0.984207
UK ton	2240.	1016.05	69.62143	22.4	20.	1.12	1.01605	1.

Volume and capacity

CONVERT	Multiplying Factors									
	cm ³	in ³	ft ³	yd ³	m ³	litre	UK pint	UK gallon	US pint	US gallon
cm ³	1.	0.061024	0.0000353	-	0.000001	0.001	0.001760	0.000220	0.002113	0.000264
in ³	16.3871	1.	0.0005787	0.0000214	0.0000164	0.016387	0.028837	0.003605	0.034632	0.004329
ft ³	28 316.8	1728.	1.	0.037037	0.028317	28.3168	49.8307	6.22883	59.8442	7.48052
yd ³	764 555.	46 656	27.	1.	0.764555	764.555	1345.429	168.1784	1615.793	201.9740
m ³	1 000 000.	61 023.7	35.3145	1.30795	1.	1000.	1759.75	219.969	2113.38	264.172
litre	1000.	61.0237	0.035315	0.001308	0.001	1.	1.75975	0.219969	2.11338	0.264172
UK pint	568.261	34.6774	0.020068	0.000743	0.0005683	0.568261	1.	0.125	1.20095	0.150119
UK gallon	4 546.09	277.420	0.160544	0.005946	0.0045461	4.54609	8.	1.	9.60760	1.20095
US pint	473.176	28.875	0.016710	0.000619	0.0004732	0.473176	0.832674	0.104084	1.	0.125
US gallon	3 785.41	231.	0.133681	0.004951	0.0037854	3.785411	6.661392	0.832674	8.	1.

Volume and capacity

CONVERT	Multiplying Factors									
	UK minim	US minim	cm ³	UK fl drachm	US fl drachm	UK fl ounce	US fl ounce	litre	in ³	
UK minim	1.	0.960760	0.059194	0.016667	0.016013	0.002083	0.002002	0.0000592	0.0036122	
US minim	1.04084	1.	0.061611	0.17348	0.01667	0.002168	0.002084	0.0000616	0.0037597	
cm ³	16.8936	16.2307	1.	0.281561	0.270519	0.035195	0.033814	0.001	0.061024	
UK fl drachm	60.	57.64560	3.55163	1.	0.960760	0.125	0.120095	0.003552	0.216734	
US fl drachm	62.45040	60.	3.696678	1.04084	1.	0.130105	0.125	0.003697	0.225585	
UK fl ounce	480.	461.1648	28.4131	8.	7.68608	1.	0.960760	0.028413	1.73387	
US fl ounce	499.604	480.	29.5735	8.32674	8.	1.04084	1.	0.029573	1.80469	
litre	16 893.6	16 230.7	1000.	281.561	270.5125	35.1951	33.8140	1.	61.0237	
in ³	276.837	265.9739	16.3871	4.61395	4.432899	0.576744	0.554113	0.016387	1.	

Installation and operating guidelines



For liquid and gas filter cartridges

Introduction

These guidelines give the correct methods for using liquid and gas filter cartridges manufactured by Parker domnick hunter. If you have any queries, our process filtration specialists will be pleased to discuss your particular filtration requirements or answer any questions you may have. We may also be contacted at any of the addresses given on the reverse of this document or through our worldwide network of subsidiary companies and distributors.

1. Storage

1.1 Store cartridges in a clean and dry environment and avoid placing heavy objects on the top of the cartridge tube or packaging. The cartridges should not be exposed to temperatures below 5 °C (41 °F) or above 40 °C (104 °F) or to direct sunlight.

1.2 Keep the cartridge in it's sealed polyethylene bag until it is time to install it.

1.3 The shelf-life for cartridge filters is as follows:-

ASYPOR membrane variants - 2 years
Liquid membrane cartridges - 3 years
Liquid depth cartridges - 5 years
TETPOR membrane variants - 5 years
Gas membrane cartridges - 5 years
Gas depth cartridges - 5 years
Gamma irradiated cartridges - Consult Certificate of Conformance

2. Installation

The various cartridge formats and end caps are shown on the end of this sheet, please refer to this if you are unsure which cartridge format you have.

2.1 New housings should be flushed out with clean water / air (dependant on the application) prior to installation of the cartridge to remove any debris. Ensure tie-rods / support plates are removed prior to flushing as vibration (especially in air) can cause components to loosen.

2.2 Before changing or installing a liquid or gas cartridge filter ensure that the filter vessel is depressurized and any liquid has been drained off. (Most vent filter cartridges are open to atmosphere but if the filter is connected to a pressurized line then ensure that the filter vessel is depressurized before removing the filter bowl).

2.3 Remove the filter bowl. For plastic housings the bowl is unscrewed and for stainless steel housings the bowl is held in place using a band clamp or a bolted flange.

2.4 Cut open the polyethylene bag at the cartridge open end and check that the o-ring seals or gaskets are clean, intact, correctly located in their grooves and not damaged.

2.5 Lubricate o-ring seals with a lubricant that is compatible with the process fluid (e.g. clean water) or use process liquid itself. Note: No lubricant should be used for oxygen applications.

2.6 Using the bag as protection and holding the cartridge as near as possible to the open end as opposed to the main body of the cartridge or the top end cap, press the

cartridge firmly into or onto the housing locations. Keep the cartridge vertical to prevent damage to the o-rings.

- a) If the vessel has a bayonet type cartridge location (A,C & R), slightly turn the cartridge clock-wise to locate the retaining lugs.
- b) For double open ended cartridges (B), take care to ensure that the cartridge gaskets on both the housing and cartridge are centred over the housing knife edge seals at both ends before closing the vessel.
- c) Cartridges with a threaded end cap (V) should be screwed in until the gasket is compressed.
- d) Threaded vent filters should be screwed into position until the flat gasket is compressed (BSPP) or the thread locks (NPT).

2.7 Remove the polyethylene bag from the cartridge(s) before the vessel is closed.

2.8 Some filter housings take more than one cartridge (multi-round) and they will have a support plate that locates on top of the cartridges and prevents movement and damage. Refer to the vessel instructions for the way that this plate is secured and ensure that it is always installed before the vessel bowl is located.

3. Operation (liquid cartridges)

Filter cartridges should not be subjected to excessive hydraulic shock and should never be reverse pressurized from the downstream to the upstream side (inside to out).

3.1 Slowly open the upstream valve and allow liquid into the filter vessel.

3.2 The vent valve located at the top of the vessel should be cracked open to allow air to escape and to ensure that the filter vessel is full of liquid. The vent valve should be closed when liquid starts to exit the valve.

N.B. If hazardous liquids are being filtered, please ensure that vent and drain valves are connected to a suitable drain line.

3.3 Slowly open the downstream valve and allow the filtered liquid to flow. It is recommended that newly installed cartridges are briefly flushed to drain and remove any debris that may have been inadvertently generated during cartridge installation or to remove trace levels of surfactant that may be present in some filter media. Liquid cartridges are shown to be blocked when the differential pressure across the filter has significantly increased and / or the flow of liquid through them is reduced to an unacceptable level. If you do not have pressure gauges that indicate the differential pressure then please contact Parker domnick hunter or their representative.

4. Operation (gas / vent cartridges)

Vent / Gas filter cartridges are hydrophobic and they will not operate effectively if they are covered in water or steam condensate. This can lead to tank collapse or cartridge deformation so please ensure that if vent

filters do come into contact with water they are replaced.

Gas cartridges are blocked when the differential pressure across the filter is high and/or the flow of gas through them is significantly reduced. In normal operation they should be changed at least annually.

5. Integrity testing

Some liquid and gas cartridges may be integrity tested by a number of manual or automatic methods. Please contact Parker domnick hunter or it's representative for further information on which method is most suitable for your application or refer to the appropriate product datasheet.

6. Hot water sanitization

(Liquid hydrophilic cartridges)

Recirculate prefiltered water through the filter for 1 hour at 80 °C (176 °F), the maximum differential pressure across the filter should be no more than 0.3 bar (5 psi). Open all system outlet valves to sanitize the system thoroughly.

7. Steam sterilization

Please refer to the datasheets to find out if your cartridge filter and housing can be autoclaved or steamed in place (SIP) and the allowed maximum temperature. To minimize the risk of contamination to a sterile system the filter should be autoclaved or SIP'd immediately prior to use.

N.B. Plastic housings cannot be steam sterilized or autoclaved.

Steam-in-place (SIP)

It is important that both liquid and gas filter cartridges do not have bulk steam flowed through them during SIP because excessive differential pressure can cause damage to the cartridge at high temperatures. It is also usual to filter the steam so that any dirt it carries does not block or damage the filter.

Vacuum autoclave sterilization

The cartridge should be installed in the housing, the vent / drain valves left open and the housing bowl left slightly open. Do not allow the cartridge to support the vessel base or allow the bowl to rest on the cartridge during autoclaving. The assembly should be autoclaved on a cycle with a slow exhaust. Where possible liquid cartridges should be flushed with clean water prior to autoclaving.

Parker domnick hunter has detailed guidelines for the sanitization and steam sterilization of liquid and gas filters so if you are unsure of the procedures please contact Parker domnick hunter or it's representative.

Disposal

All cartridge filters should be disposed of in a safe manner and in line with Health & Safety Guidelines.



**Installation and Operating
Instructions for Liquid &
Gas Filter Cartridges**

**Manuel D'installation et D'utilisation
des Cartouches pour les Liquides
et les Gas**

**Installation und Bedienungsanleitung
Für Filterelemente zur Flüssigkeits-
und Gasfiltration**

**Instrucciones de Manejo e Instalación
de los Cartuchos Filtrantes Para
Liquidos y Gases**



ENGINEERING YOUR SUCCESS.



www.parker.com/dhpiomic

Glossary of terms used in filtration



A

Absolute pressure

Associated with gas systems. The absolute pressure is the total pressure exerted on a system equal to atmospheric pressure plus gauge pressure, for example 2 barg = 3 bar absolute.

Absolute rating

A definitive value given to a filter that represents the smallest particle size capable of being captured by the filter. Typically it refers to 100% retention at a particular micron rating. The assigning of micron ratings is however dependant on the test methodology used. e.g.: a sterile grade absolute rated liquid filter is assigned a 0.2 micron rating if it retains all microorganisms of a predetermined size it does not mean that the filter has 0.2 micron pores. When selecting a filter for a particular application always refer to the methods and assumptions made for assigning the micron rating.

Air flow

A measure of the amount of air that flows through a filter at a certain system pressure and pressure drop. This is typically expressed in normalized units i.e.: the relative flow rate at atmospheric pressure and is quoted for a clean unused filter. Always quote system pressures when sizing gas filters.

Aerosol integrity testing

A method specifically designed for sterile gas filters whereby aerosol in the most penetrating particle size (MPPS: 0.2-0.3 micron) is used as a non-destructive challenge to the filter to determine whether it is providing sterile gas. The test can be performed using an automated test instrument such as the Parker domnick hunter Valairdata 3.

Autoclave

A closed pressure vessel into which steam is introduced (typically at a temperature of 121 - 134 °C (250 - 273 °F)) to sterilize the contents.

B

Backwash

A reverse flow of liquid through a filter in order to flush out trapped solids.

Bacterial challenge

This refers to a live bacterial challenge of a filter in either the liquid or gas phase. The type of organism used for the test depends on the assigned micron rating of the filter. For example a 0.2 micron sterile grade liquid filter is challenged with the organism *Brevundimonas diminuta* (test method ASTM 838-05) while a 0.45 micron absolute rated liquid filter is challenged with a suspension of *Serratia marcescens*. In some cases for critical performance validation requirements it will be necessary to challenge the filter with bacteria in the actual process fluid being filtered.

Beta rating

A measure of a filter's efficiency based on the number of particles present in the influent (upstream) to those in the effluent (downstream). Efficiency is expressed as a BETA ratio and is calculated as follows:

$$\text{Beta Ratio} = \frac{\text{Number of particles in the influent}}{\text{Number of particles in the effluent}}$$

Generally a Beta Ratio at 5000 is accepted by the industry as being an 'absolute' rating for media prefilters.

C

Cartridge or filter cartridge

A filtration or separation device usually supplied in a cylindrical format which locates easily and quickly into a filter housing.

Chemical compatibility

When selecting filter materials attention needs to be given to their compatibility to the fluid which is to be filtered. A filter (depending on application) needs to be assessed for reduction in performance in terms of material degradation, integrity, etc. as well as quantifying any extractables levels. It should be noted that the compatibility of a filter is dependent on the process conditions. General material compatibility databases assume limited temperature and exposure time. They also refer to just one chemical. In an actual process there could be a combination of chemicals, high differential pressure and high temperature which all could influence filter performance. General guidance on filter performance can be given from experience and in-house data but normally it is recommended that filter compatibility is tested in the process conditions.

Clarification

This is the selective removal of particulate from a process fluid usually achieved through depth filtration. The degree of clarification is dependant on customer specification.

Colony forming unit (CFU)

The minimum number of cells on an agar plate which will give rise to a visible colony. This term is most commonly seen in the validation of sterile filters to a live bacterial challenge where the challenge and the number of organisms recovered is stated in CFU.

Coalescing

When small droplets of aerosolized liquid merge together to form larger droplets. This normally occurs in a depth filter as the process gas carrying the entrained liquid droplets passes through the filtration media. A coalescing filter such as the Parker domnick hunter OIL-X also flows from the inside of the cartridge to the outside so any coalesced liquid drains to the base of the filter and subsequently into the bottom of the filter housing.

Colloid

Colloids are molecules that have not coagulated together to form a precipitate but remain in liquid suspension. These molecules are very small in size and have a molecular charge that affects their affinity for other molecules and materials. The choice of filter type and design is of paramount importance for a colloidal system if premature blockage is to be avoided.

Compaction

This can occur to a filtration medium when it is subjected to high differential pressures. The high forces on the filtration media (especially depth type) can lead to compression of the structure and subsequent changes in filtration characteristics.

Concentrate

The retained non filtered stream from a crossflow filter system.

Cross flow filtration

A filter characterized by the feed stream traveling parallel to instead of directly through the filtration medium. This has the advantage of minimizing the blockage of the membrane as the system is to some extent 'self cleaning'.

D


Dead leg

An area of pipework where there is potentially no flow and therefore stagnant conditions exists. It is extremely important to eliminate these if contamination issues are to be minimized.

Depth filter

A depth filter is characterized by the thickness of the filtration media as well as its structure. A depth filter is normally fibrous in nature and contaminant is retained through the depth of the filtration media rather than just the surface.

Diffusional interception

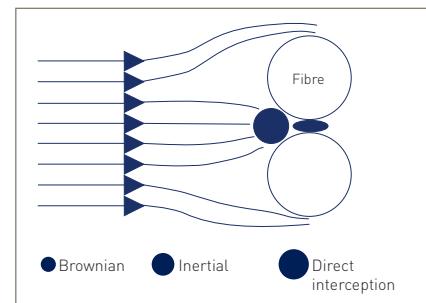

This is the dominant removal mechanism for the smallest particles captured by a filter in the gas phase. Particles as small as 0.01 µm exhibit great diffusional movement (Brownian Motion) which has the effect of increasing its nominal mean diameter to the filter. The efficiency of this capture mechanism decreases as the particle size increases.

Diffusional flow

A non-destructive integrity test method for membrane based filters. It involves wetting out every pore in the membrane structure with water or the process fluid or a low surface tension liquid in case of hydrophobic membrane. Compressed air is applied to the upstream side of the filter and gas diffuses through the wetted pores. This flow rate is either measured directly by mass flow meters or indirectly via measuring the drop in pressure on the upstream side of the filter.

Differential pressure

Differential pressure (dP) is the difference in the pressure measured upstream (influent) and downstream (effluent) of a filter. Particularly in liquid applications differential pressure will increase to a point where either filter damage or insufficient flow will result. The higher the differential pressure the higher the energy cost so it is important to balance the pressure drop requirements with the installation size and required lifetime to blockage. Units of measurement are bar and psi as opposed to barg and psig.



Glossary of terms used in filtration

E

Effective filtration area (EFA)

This is the area of filtration material available for filtration.

Effluent

The fluid which has passed through a filter.

Extractables

When a filter is in contact with the process fluid, chemical components may leach from the materials of construction and deposited in the filtrate. The levels of non-volatile extractables for a limited number of fluids are quoted in the filter validation guide. The level of extractables is dependent on the process conditions. Filtration of solvents, high temperature fluids and steam sterilization are three areas where extractables can increase.

F

Filter (noun) / filter cartridge / cartridge

An apparatus which performs filtration.

Filter (verb)

To pass a fluid or gas through a porous medium in order to remove solid particles.

Filter efficiency

Filter efficiency is a measure of the percentage of particles that are removed from the fluid by the filter. Typically these are given in terms of the % removal for a certain size of particle. A filter efficiency may also be given across a range of particle sizes. For a number of gas applications the efficiency of a filter may be quoted in relation to the filters ability to remove particles at the most penetrating particle size (MPPS) of 0.2-0.3 micron. Always ensure filter efficiency is matched to the requirements of the process.

Filterability indices (FI) and Vmax

This is an indication of a filters capacity to process certain fluids. It generally gives a measure of the rate of blockage of a filter as well as the theoretical maximum throughput. The time required to flow two consecutive 200 ml fluid samples is recorded and the filterability indices are calculated from the results. The two formulae used are as follows:

$$(V_{max}) = \frac{400 + 400T_1}{(T_2 - 2T_1)}$$

$$FI = (T_2 - 2T_1)$$

T_1 = Time to filter first 200 ml

T_2 = Time to filter second 200 ml

It should be noted that these methods give a general indication of performance and are often more useful in comparative performance measurement between different filter types.

Filtrate

Another name for effluent.

Filter sterilization

Sterilization is the act of making an organism barren or infertile (unable to reproduce). The sterilization of a filter can be achieved by a number of methods including dry heat, steam, ethylene oxide, hydrogen peroxide or irradiation. The method chosen depends on the process and

the materials of construction of the filter but by far the most widely used is that of steam, either in an autoclave or via steam-in-place (SIP).

Flux

The rate of fluid flow (gas or liquid) when expressed in terms of flow per unit area of the filter that removes the contaminants from the fluid stream. It can apply to both depth and membrane media.

G

Gauge pressure

The pressure of a system measured by a gauge, which excludes atmospheric pressure, for example 1 bar atmosphere (or 1 bar absolute) = 0 barg.

H

Housing

An enclosure for a filter element, typically rated for pressure, that directs the fluid through the filter.


Hydrophilic

Hydrophilicity is the ability of a filtration media to 'wet out', that is, for the porous structure to be completely filled with the liquid being filtered. This is an important characteristic as incomplete wetting of the structure can lead to a reduction in flow capacity and problems with integrity testing. All liquid filters are 'hydrophilic' apart from those that may have been selected for use with aggressive solvents. These filters are typically based on a fluoropolymer and their structure needs to be wetted with a low surface tension liquid such as isopropyl alcohol. Once the structure has been wet, the filter will process aqueous solutions without a problem.

I

Inertial impaction

This is a removal mechanism for particles captured by a filter in the gas phase. The particles follow the streamlines of gas between the filter fibres and membrane pores. Due to their mass the inertia of the particle will cause it to move out of the streamline and attach itself to a fibre or pore wall. The effect of this capture mechanism increases with particle size / mass.

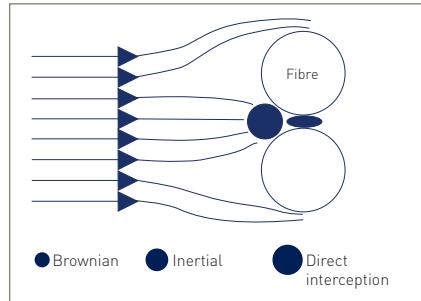

Influent

The fluid entering the filter system.

In vitro

In an unnatural position e.g. outside the body "In vitro" is Latin for "in glass" an experiment performed without the involvement of a whole, living organism.

In vivo

The testing of a substance or experimentation in or using a living, whole organism.

L

Log reduction value (LRV)

This is a measurement of a filters removal efficiency for a specific contaminant. It is normally associated with the bacterial retention of a filter. The LRV is :

$$\text{Log}_{10} \frac{\text{Number of bacteria in the influent}}{\text{Number of bacteria in the effluent}} \text{ e.g. } \left(\text{Log}_{10} \frac{1 \times 10^{10}}{1} \right) = \text{LRV of } >10$$

It is always expressed as > (greater than) as 1 has to be used for the effluent even if there are no organisms present. This can also be expressed as a 10 log reduction or a titre reduction of 10^{10} .

M

Medium (Media)

This is the component of the filter that removes the contaminants from the fluid stream. Also commonly referring to depth - type materials, in its more generic sense a filter medium / media can refer to either depth or membrane filter materials.

Microfiltration

Microfiltration is the process of removing particles from a liquid or gas by passing it through a porous medium. It generally involves removing particles between the sizes of 10 and 0.04 micron in liquids, and down to 0.01 micron in gases.

Micron (micrometer)

Designated by the Greek letter μ a micron is 10^{-6} mm (millimeters) or 10^4 (Angstroms) or 0.00003937 inch. For a perspective on this size a human hair is approximately 70 microns thick and the limit of resolution of the naked eye is around 40 microns.

Membrane

A membrane is a thin, porous film typically between 30 and 150 micron in thickness. It has of tens of millions of pores / cm^2 through which the process fluid runs. The nature of the pore structure is determined by the manufacturing method. Solvent cast membranes such as Polyethersulphone (PES) and Mixed Esters of Cellulose (MEC) have a defined pore structure which can be asymmetric whilst membrane such as Polytetrafluoroethylene (PTFE) which is manufactured by 'stretching' have a fibrous appearance and a less defined pore structure.

N

Nanofiltration

Filtration that removes both particles and small dissolved molecules and ions. Finer than ultrafiltration, not as fine as Reverse Osmosis.

Nanometer

A nanometer is 10^{-9} meters

Nominal filter rating

This rating is often quoted within the filtration industry but great care should be taken in ensuring the efficiency and test methodologies are completely understood. A 5 micron nominal filter could be 99% retentive at 5 micron, another could be 80%. It can be very misleading to compare the performance of filters on nominal ratings. When selecting a filter the duty required should be

Glossary of terms used in filtration



compared to the individual performance characteristics of filter. Parker domnick hunter has the experience to help select the most appropriate filter for the application.

O

Oleophobic

Oleophobic membranes and depth media have the capability to repel fluids such as oil and lubricants. This phenomena is used in some of the new generation oil coalescing filters.

Oxidation

This refers to the degradation of materials in the presence of oxygen and high temperature. It is normally associated with high temperature gas systems where the combination of steam sterilization can lead to the onset of oxidation of polypropylene filtration components in as little as 3 months. For applications where continuous (1 year and above) exposure to high temperature is required the use of a special product with oxidation resistant filtration support materials such as the HIGH FLOW TETPOR H.T. is recommended.

Oxidation can also occur on filters used in ozonated water systems. In these instances careful selection of filter components is required.

P

Pleating

Filtration media can be pleated or corrugated to maximize the filtration area. By pleating filtration media it is possible to fit a large EFA in a relatively small cartridge volume.

Voids volume (porosity)

This is a measurement of the free space in a filtration media. The more free space the less the resistance to flow. Typical values for a membrane are in the region of 50 – 80% and for depth type media between 60 - 95%.

Pressure decay

A non-destructive integrity test method for membrane based filters. It involves wetting out every pore in the membrane structure with water or the process fluid or a low surface tension liquid in case of hydrophobic membrane. Compressed air is applied to the upstream side of the filter and gas diffuses through the wetted pores. This causes a pressure drop in the upstream side of the filter known as the pressure decay. The maximum allowable pressure decay for a filter is dependant on the upstream volume and therefore must be known.

Pressure Decay (mbar /min) =

$$\frac{\text{Diffusional Flow (ml / min)}}{\text{Upstream Vol (l)}}$$

Pyrogenicity

Pyrogenicity is the tendency of a substance to raise body temperature when injected into the body. Filtration materials that come in contact with injectable liquids must meet pyrogenicity standards and be classified as non-pyrogenic. Pyrogenicity can be determined by such standard tests as the Limulus Amoebocyte Lysate (LAL) test.

Permeate

Synonymous with filtrate.

R

Regeneration


When a filter becomes blocked with protein based material it may be possible to regenerate, or clean the filter, so improving overall lifetime.

Reverse jetting

The application of high pressure compressed gas to the inside of a filter to release powder collected on its surface.

Reverse osmosis

Forcing a liquid through a non-porous membrane, removing particles, along with dissolved molecules and ions. Reverse osmosis is the finest form of membrane separation and is used to desalinate water for drinking, and in the preparation of ultrapure water for various industries.

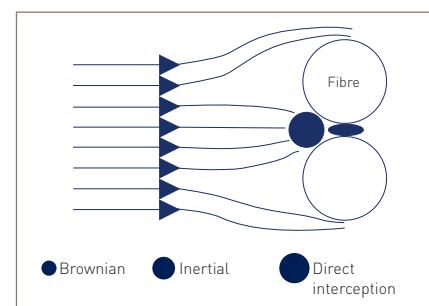

Solute

A solid which is dissolved in a solvent. For instance, the salt in salt water is a solute.

Solvent

A liquid substance capable of dissolving other substances. The solvent does not change its state in forming a solution.

Stabilization

This is the reduction in microbial loading in a fluid system and is generally associated with the beverage industry where partial rather than complete removal of spoilage organisms may be required to extend shelf-life.

Sterilization

In terms of filtration this means the elimination of all living microorganisms from the influent stream.

Surfactant

Acronym for a surface active agent. In filtration it is also sometimes called a wetting agent. If a filter is being used to filter aqueous solutions and incomplete wetting of the membrane pore structure is encountered a 'wetting agent' may be added to the membrane surface by flowing a quantity of surfactant through the filter. However, the use of a wetting agent is not desirable, especially in a pharmaceutical environment, as there is also the possibility of the surfactant leaching from the filter into the filtrate during processing or steam sterilization, etc.

T

Thermal stability

This is most important during sterilization of the filter. The majority of cartridge and disposable type filters are manufactured from polymers such as polypropylene and nylon. During sterilization the components of the filter expand and contract putting great strain on the device. The filter performance with respect to steam sterilization should be matched closely to the requirements of the process. It should be noted that some filter configurations cannot be in-situ steam sterilized but can only be autoclaved.

Titre reduction

See LRV.

Turbidity

This is a measurement of the amount of suspended particles in a fluid and is effectively a clarity index. It is measured in NTU (Nephelometric Turbidity Units).



Glossary of terms used in filtration

U

Unloading

The release of contaminants which had initially been captured by a filter. This is most likely to occur in filtration systems with are subjected to high pressure pulses such as high capacity filling lines.

Ultrafiltration

Filtration of a liquid that separates suspended or dissolved substances based on their molecular weight or size. Ultrafiltration generally refers to separating everything larger than a large molecule. Compare to microfiltration, nanofiltration, reverse osmosis.

V

Viscosity

Viscosity is a measurement of the resistance to flow of a fluid. The more viscous the fluid, the greater the time required to filter. Viscosity will in general reduce with an increase in temperature. This is why very viscous solutions such as glucose are heated prior to filtration.

V_{max}

See Filterability Indices.

W

Water flow

Measure of the amount of water that flows through a filter. Related to the degree of contamination, differential pressure, total porosity, and filter area (ASTM:F317-72). Expressed in the membrane industry in units of milliliters / minute / square centimetre.

Water Intrusion

A non-destructive integrity test method specifically designed for hydrophobic filters. It involves filling the upstream volume of a filter housing with water and applying a pressure, typically in the order 2.5 barg. As the membrane is hydrophobic the bulk water will not pass through. However, due to the difference in pressure between the upstream and downstream side of the filter there is a net loss of water from the upstream side due to evaporation and the slight penetration of water into the pore structure. This loss of water results in a pressure drop which is displayed as either a water intrusion value or a water flow value. The water intrusion is the measure of the increase in compressible gas volume expressed at atmospheric pressure and the water flow equates to the volume of water lost from the system.

Water flow = Water Intrusion / Absolute test pressure.

Additional Support



Food and Beverage Catalogue

The complete food and beverage product portfolio

Wine

www.parker.com/dhwine

Product Selection Guide

Wine Industry Overview Guide

Application Note: Standardization of wine for tanker loading / off-loading

Brewing

www.parker.com/dhbeer

Product Selection Guide

Brewing Industry Overview Guide

Application Note: Successful powder trap filtration of beer

Application Note: Cold stabilization of ale

Bottled Water

www.parker.com/dhbottledwater

Product Selection Guide

Bottled Water Industry Overview Guide

Application Note: Effective microfiltration of bottled water

Beverage

www.parker.com/dhbeverage

Beverage Industry Overview Guide

Application Note: Removal of yeast from carbon dioxide recovered from fermentation

Application Note: Microfiltration in the production of carbonated drinks

Integrity Testing

www.parker.com/dhbeverage

Valairdata 3 Brochure

Application Note: Assuring the performance of sterile gas filtration in drinks packaging

The **NEW** Valairdata 3 demonstration video



www.parker.com/dhbeverage



Parker domnick hunter commitments

Protecting **quality** and **taste** for **50** years

With the ever-increasing choice of cold beverages, the emphasis on the majority of volume produced is to provide consumers with a fresh tasting, visually brilliant product. Whether producing premium varieties or own-label supermarket brands, quality specifications are increasing to reflect consumer needs and the extended shelf-life requirements for products that travel further afield.

Since 1963, Parker domnick hunter has partnered with beverage producers to meet their changing needs. Through a structured application-led approach, we can provide options for various levels of clarity and microbiological stability throughout the production process, whilst demonstrating proven cost reductions through operational efficiencies and filter design. Quality, economy and continuing process optimisation are our ongoing commitments.

www.parker.com/dhb beverage

North America:

toll free: +1 877 784 2234
email: dhpsales.na@parker.com

Europe:

phone: +44 (0)191 4105121
email: dhprocess@parker.com

ENGINEERING YOUR SUCCESS.

Parker | **domnick**
hunter



Parker Worldwide

Europe, Middle East, Africa

AE – United Arab Emirates, Dubai

Tel: +971 4 8127100
parker.me@parker.com

AT – Austria, Wiener Neustadt

Tel: +43 (0)2622 23501-0
parker.austria@parker.com

AT – Eastern Europe, Wiener Neustadt

Tel: +43 (0)2622 23501 900
parker.easternurope@parker.com

AZ – Azerbaijan, Baku

Tel: +994 50 2233 458
parker.azerbaijan@parker.com

BE/LU – Belgium, Nivelles

Tel: +32 (0)67 280 900
parker.belgium@parker.com

BG – Bulgaria, Sofia

Tel: +359 2 980 1344
parker.bulgaria@parker.com

BY – Belarus, Minsk

Tel: +375 17 209 9399
parker.belarus@parker.com

CH – Switzerland, Etoy

Tel: +41 (0)21 821 87 00
parker.switzerland@parker.com

CZ – Czech Republic, Klicany

Tel: +420 284 083 111
parker.czechrepublic@parker.com

DE – Germany, Kaarst

Tel: +49 (0)2131 4016 0
parker.germany@parker.com

DK – Denmark, Ballerup

Tel: +45 43 56 04 00
parker.denmark@parker.com

ES – Spain, Madrid

Tel: +34 902 330 001
parker.spain@parker.com

FI – Finland, Vantaa

Tel: +358 (0)20 753 2500
parker.finland@parker.com

FR – France, Contamine s/Arve

Tel: +33 (0)4 50 25 80 25
parker.france@parker.com

GR – Greece, Athens

Tel: +30 210 933 6450
parker.greece@parker.com

HU – Hungary, Budaörs

Tel: +36 23 885 470
parker.hungary@parker.com

IE – Ireland, Dublin

Tel: +353 (0)1 466 6370
parker.ireland@parker.com

IT – Italy, Corsico (MI)

Tel: +39 02 45 19 21
parker.italy@parker.com

KZ – Kazakhstan, Almaty

Tel: +7 7273 561 000
parker.easternurope@parker.com

NL – The Netherlands, Oldenzaal

Tel: +31 (0)541 585 000
parker.nl@parker.com

NO – Norway, Asker

Tel: +47 66 75 34 00
parker.norway@parker.com

PL – Poland, Warsaw

Tel: +48 (0)22 573 24 00
parker.poland@parker.com

PT – Portugal, Leca da Palmeira

Tel: +351 22 999 7360
parker.portugal@parker.com

RO – Romania, Bucharest

Tel: +40 21 252 1382
parker.romania@parker.com

RU – Russia, Moscow

Tel: +7 495 645-2156
parker.russia@parker.com

SE – Sweden, Spånga

Tel: +46 (0)8 59 79 50 00
parker.sweden@parker.com

SK – Slovakia, Banská Bystrica

Tel: +421 484 162 252
parker.slovakia@parker.com

SL – Slovenia, Novo Mesto

Tel: +386 7 337 6650
parker.slovenia@parker.com

TR – Turkey, Istanbul

Tel: +90 216 4997081
parker.turkey@parker.com

UA – Ukraine, Kiev

Tel: +380 44 494 2731
parker.ukraine@parker.com

UK – United Kingdom, Warwick

Tel: +44 (0)1926 317 878
parker.uk@parker.com

ZA – South Africa, Kempton Park

Tel: +27 (0)11 961 0700
parker.southafrica@parker.com

North America

CA – Canada, Milton, Ontario

Tel: +1 905 693 3000

US – USA, Cleveland

Tel: +1 216 896 3000

Asia Pacific

AU – Australia, Castle Hill

Tel: +61 (0)2-9634 7777

CN – China, Shanghai

Tel: +86 21 2899 5000

HK – Hong Kong

Tel: +852 2428 8008

IN – India, Mumbai

Tel: +91 22 6513 7081-85

JP – Japan, Tokyo

Tel: +81 (0)3 6408 3901

KR – South Korea, Seoul

Tel: +82 2 559 0400

MY – Malaysia, Shah Alam

Tel: +60 3 7849 0800

NZ – New Zealand, Mt Wellington

Tel: +64 9 574 1744

SG – Singapore

Tel: +65 6887 6300

TH – Thailand, Bangkok

Tel: +662 186 7000-99

TW – Taiwan, Taipei

Tel: +886 2 2298 8987

South America

AR – Argentina, Buenos Aires

Tel: +54 3327 44 4129

BR – Brazil, São José dos Campos

Tel: +55 800 727 5374

CL – Chile, Santiago

Tel: +56 2 623 1216

MX – Mexico, Apodaca

Tel: +52 81 8156 6000

European Product Information Centre

Free phone: 00 800 27 27 5374

(from AT, BE, CH, CZ, DE, DK, EE, ES, FI, FR, IE, IL, IS, IT, LU, MT, NL, NO, PL, PT, RU, SE, SK, UK, ZA)

© 2014 Parker Hannifin Corporation. All rights reserved.

CAT_Food_and_Bevergæ_07/14 Rev. 1
Second Edition

Parker Hannifin Manufacturing Ltd
domnick hunter
Process Filtration - Europe
Durham Road
Birtley, Co. Durham
DH3 2SF, England
phone +44 (0)191 4105121
fax +44 (0)191 4105312
email: dhprocess@parker.com
www.parker.com/dhbeverage

Parker Hannifin Corporation
domnick hunter
Process Filtration - North America
2340 Eastman Avenue,
Oxnard, California, USA 93030
toll free: 877 784 2234
phone: +1 805 604 3400
fax: +1 805 604 3401
email: dhpsales.na@parker.com
www.parker.com/dhbeverage