


HRD 60 FU/FUK

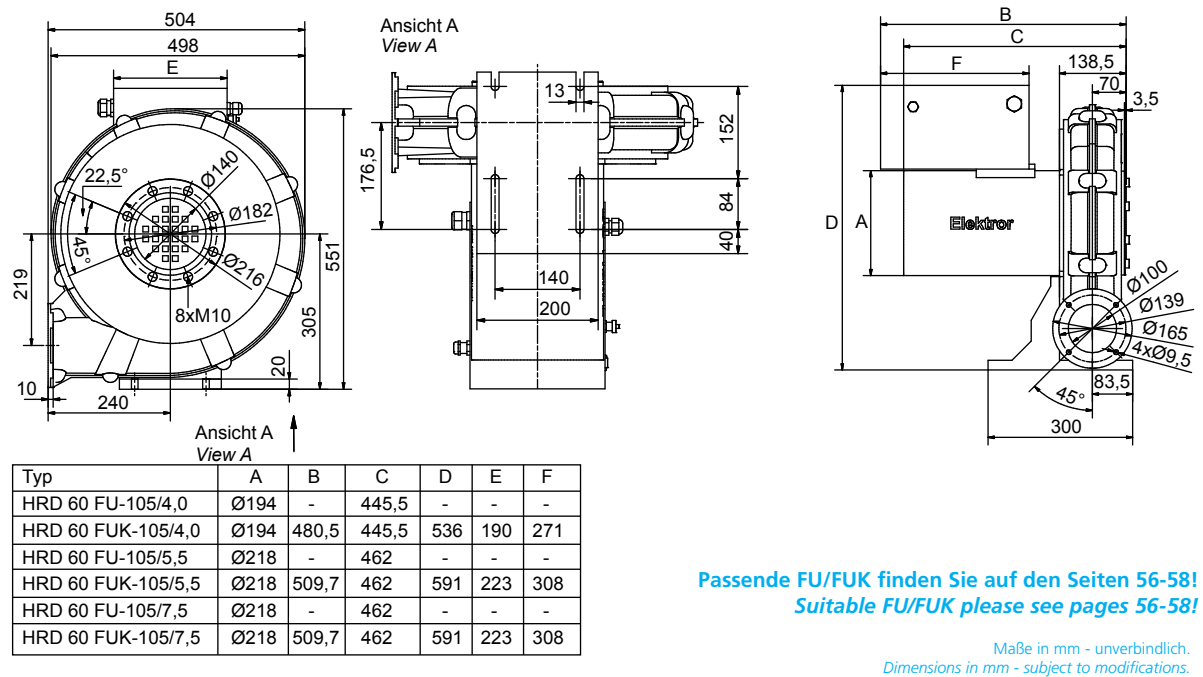

Typ	Volumenstrom	Gesamtdruckdifferenz	Spannung	Frequenz	Stromaufnahme	Drehzahl	Motorleistung	Gewicht (ca.)
Type	Volumetric flow rate	Total pressure difference	Voltage	Frequency	Current consumption	Number of revolutions	Motor rating	Weight (approx.)
	m³/min	Pa	V	Hz	A	min⁻¹	kW	kg
HRD 60 FU*-105/4,00	21,0	10500	400 Δ	105	9,5	6190	4,00	36
HRD 60 FUK*-105/4,00	21,0	10500	400 Δ	105	9,5	6190	4,00	46
HRD 60 FU*-105/5,50	32,0	10500	400 Δ	105	12,0	6140	5,50	46
HRD 60 FUK*-105/5,50	32,0	10500	400 Δ	105	12,0	6140	5,50	56
HRD 60 FU*-105/7,50	40,0	10500	400 Δ	105	14,5	6235	7,50	50
HRD 60 FUK*-105/7,50	40,0	10500	400 Δ	105	14,5	6235	7,50	60

*= In diesem Ventilator muss eine Drehzahlregelung installiert werden. | A variable speed drive must be installed with this blower.

#= In diesem Ventilator ist eine Drehzahlregelung integriert. | A variable speed drive is integrated within the blower.

Kennlinien/Characteristic curves

