


**AUCH FREQUENZUMRICHTER-GEEIGNET ERHÄLTlich!**  
**ALSO FREQUENCY CONVERTER-SUITABLE AVAILABLE!**

Typ	Volumenstrom	Gesamtdruckdifferenz	Spannung	Frequenz	Stromaufnahme	Drehzahl	Motorleistung	Kondensator	Gewicht
Type	Volumetric flow rate	Total pressure difference	Voltage	Frequency	Current consumption	Number of revolutions	Motor rating	Capacitor	Weight
	m <sup>3</sup> /min	Pa	V	Hz	A	min <sup>-1</sup>	kW	µF/V	kg
<b>D 05 M</b>	10,0	430	208-265/ 360-460	50	0,59-0,59/ 0,34-0,34	2550	0,13	-	5,0
<b>D 05 M</b>	11,0	620	208-290/ 360-500	60	0,74-0,74/ 0,43-0,43	3000	0,22	-	5,0
<b>E 05</b>	10,0	430	230	50	1,1	2550	0,14	3/450	5,2
<b>E 05</b>	9,5	620	230	60	0,9	3300	0,14	3/450	5,2

**50 Hz**

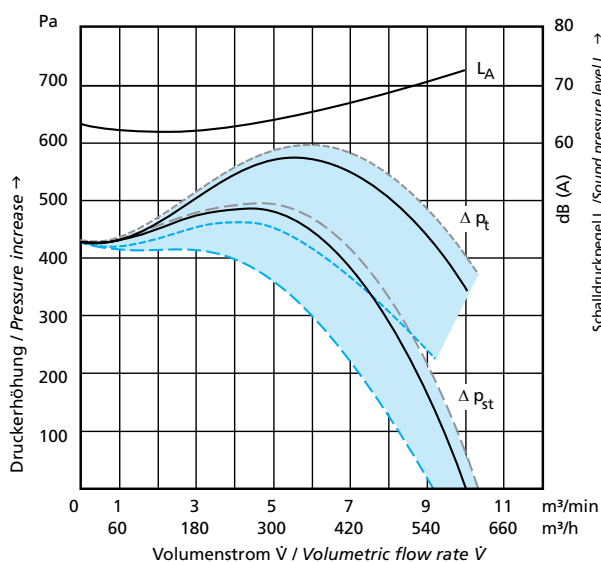

**60 Hz**

