



1SD 510

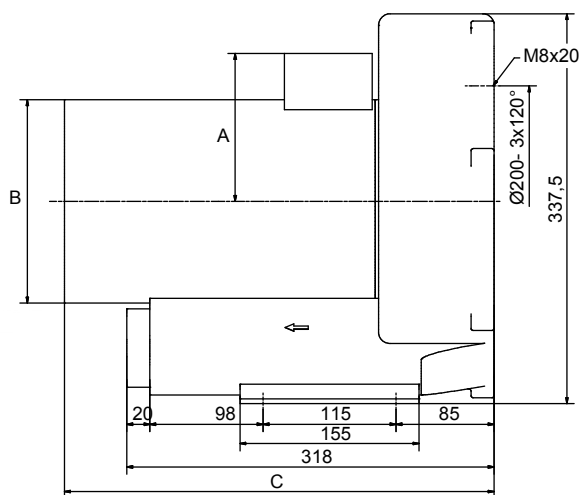

Motor	A	B	C
1,1 kW - 1,5 kW	120	Ø156	315
1,6 kW - 2,2 kW	128	Ø176	346
2,2 kW - 3,8 kW	128	Ø176	372

Maße in mm - unverbindlich.
Dimensions in mm - subject to modifications.


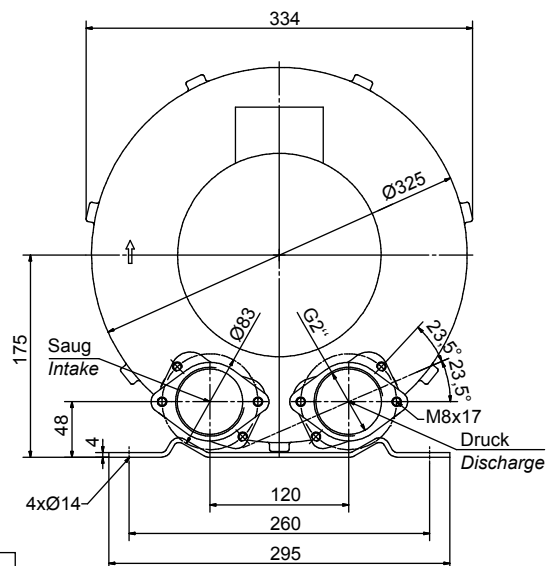


FREQUENZUMRICHTER GEEIGNET!
FREQUENCY CONVERTER-SUITABLE!

Typ	Type	Frequenz Frequency	Grenzwerte der Drosselkurve Überdruck Maximum performance when used as blower		Grenzwerte der Drosselkurve Unterdruck Maximum performance when used as extractor		Nennwerte des Motors Motor ratings			Schalldruckpegel Sound pressure level	Gewicht (ca.) Weight (approx.)
			$\dot{V}_{max.}$ $\dot{V}_{max.}$	$\Delta p_t \text{ max.}$ $\Delta p_t \text{ max.}$	$\dot{V}_{max.}$ $\dot{V}_{max.}$	$\Delta p_t \text{ max.}$ $\Delta p_t \text{ max.}$	Leistung Rated output	Spannung Voltage	Strom Current		
		Hz	m³/min	mbar	m³/min	mbar	kW	V	A	dB (A)	kg
1SD 510	✓	50	3,50	170	3,50	170	1,10	207-253/ 360-440	4,35/2,50	64	22
		60	4,25	140	4,25	150	1,50	220-250/ 415-480	5,00/2,90	70	22
1SD 510	✓	50	3,50	190	3,50	200	1,60	207-253/ 360-440	7,50/4,30	64	23
		60	4,25	210	4,25	220	2,20	220-250/ 415-480	8,00/4,60	70	23
1SD 510	✓	50	3,50	270	3,50	220	2,20	207-253/ 360-440	8,10/4,60	64	25
		60	4,25	290	4,25	260	3,80	220-250/ 415-480	13,00/7,50	70	25

Überdruck / Pressure

Unterdruck / Vacuum

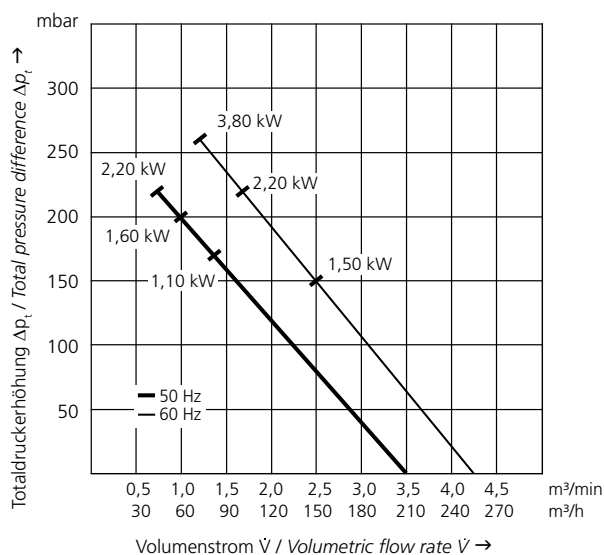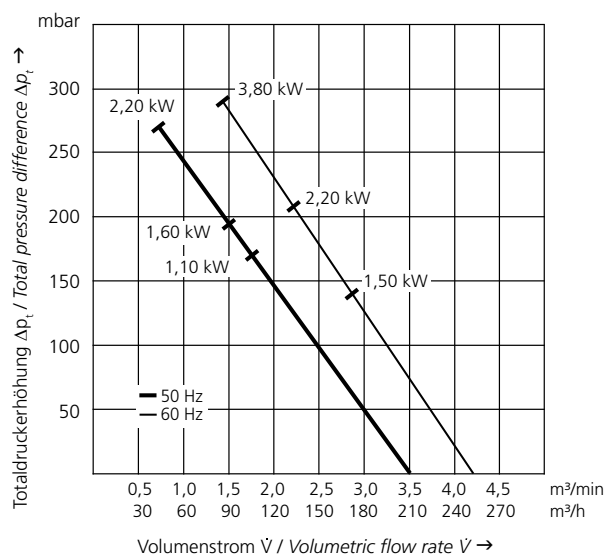

Technische und konstruktive Änderungen vorbehalten.
Technical and constructional subject to change.