



HRD 2/3 T

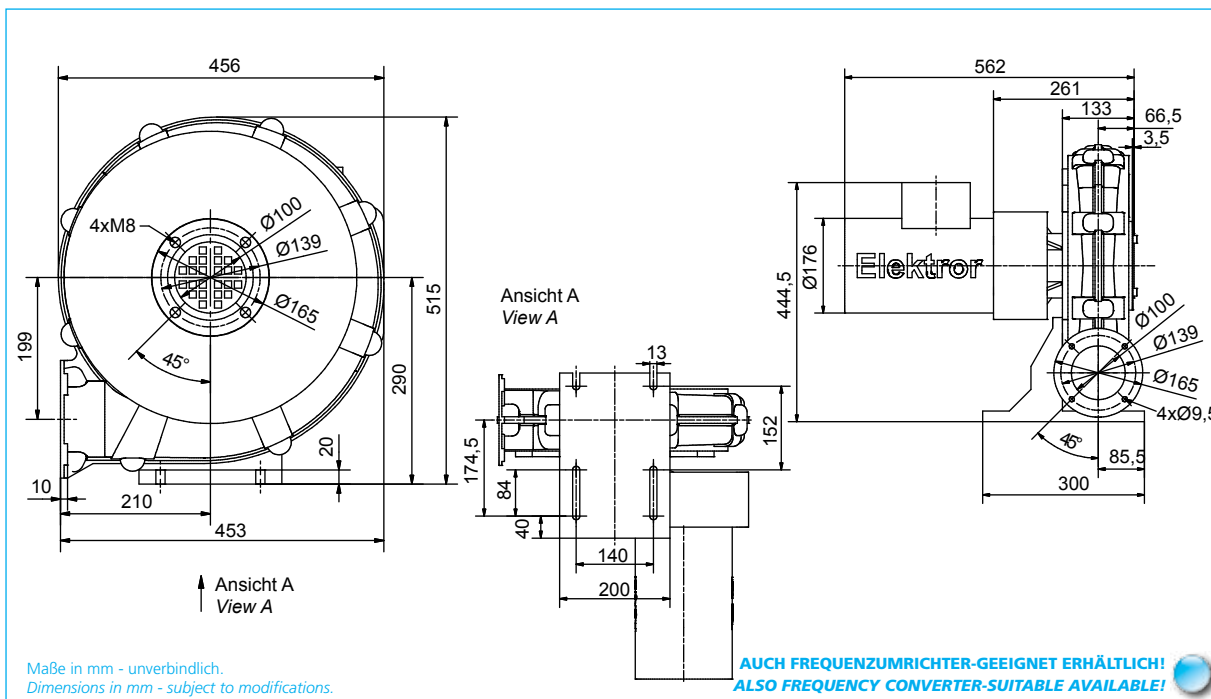

Typ Type	Effizienzklasse Efficiency class	Frequenz Frequency	Volumenstrom Volumetric flow rate	Gesamtdruckdifferenz Total pressure difference	Spannung Voltage	Stromaufnahme Current consumption	Motor-drehzahl Number of revolutions	Motorleistung Motor rating	Ventilator-drehzahl ¹⁾ Blower speed ¹⁾	Gewicht (ca.) Weight (approx.)
		Hz	m³/min	Pa	V	A	min⁻¹	kW	min⁻¹	kg
HRD 2/3 T	IE3	50	13,0	5600	230/400	5,40/3,10	2905	1,50	4500	32
	IE3	60	15,5	5600	230/400	6,40/3,70	3505	1,80	4500	32
	NEMA*	60	15,5	5600	277/480	5,40/3,10	3505	1,80	4500	32

* NEMA Premium ¹⁾ Drehzahlabweichungen von ± 5% sind möglich./Deviations in the revolutions of ± 5% are possible.

Kennlinien/Characteristic curves

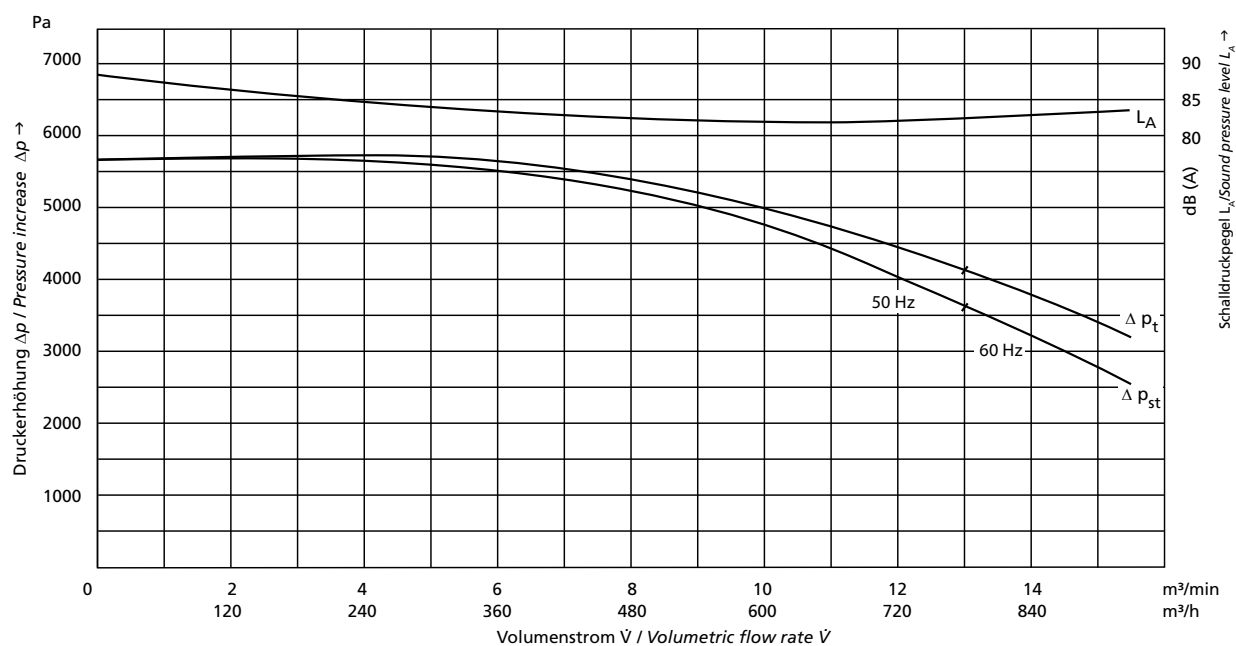

Ventilator nicht freiströmend einsetzbar. Blower not to be operated with free discharge.

Technische und konstruktive Änderungen vorbehalten. Angaben gemäß ErP-Richtlinie siehe Seite 52-53.
Technical and constructional subject to change. Data according to ErP directive see page 52-53.